

Versatile Design Options . Aesthetically Pleasing . Sustainable . Durable . Lightweight

# XTREME TRIM<sup>®</sup>

For use with siding and soffit



XtremeTrim<sup>®</sup>

Ventilation










XtremeColor Flashing

Water Management








## XtremeTrim® Butt Joint Flashing

	<b>Plank Flash</b> ..... 35 PF US Patent #7,721,488
	<b>ProLine Plank Flash</b> ..... 35 PLPF US Patent #7,721,488






## XtremeTrim® Horizontal Reveal

	<b>F Reveal</b> ..... 32 FR
	<b>Horizontal Bead Reveal</b> ..... 9 BRH
	<b>Horizontal Board Reveal</b> ..... 17 RHB
	<b>Horizontal Board Reveal</b> ..... 17 RHBG
	<b>Horizontal Reveal</b> ..... 16 RH
	<b>Horizontal Z</b> ..... 15 CQZ
	<b>Horizontal Z</b> ..... 15 XZH
	<b>Horizontal Z</b> ..... 15 XZS
	<b>Window Flashing</b> ..... 34 XWF






## XtremeTrim® Vertical Reveal

	<b>J Mold</b> ..... 11 JMH
	<b>J Mold</b> ..... 11 JMS
	<b>Standard H Mold</b> ..... 6 XHM
	<b>Transition Vertical Reveal</b> ..... 14 RVT
	<b>Vertical Batten Reveal</b> ..... 18 RVBN
	<b>Vertical Bead Reveal</b> ..... 8 BRV
	<b>Vertical Board Reveal</b> ..... 13 RVB









## XtremeTrim® Vertical Reveal

	<b>Vertical Board Reveal</b> ..... 13 RVBG
	<b>Vertical Siding H Mold</b> ..... 7 SHM
	<b>Vertical T Mold</b> ..... 10 TM
	<b>Vertical Reveal</b> ..... 12 RV
	<b>Vertical Reveal</b> ..... 12 RV58

## XtremeTrim® Inside Corner

	<b>Bullnose Inside Corner</b> ..... 29 XICB
	<b>Inside Corner</b> ..... 20 XIC / XICJ US Patent #5,960,598
	<b>Low Profile Panel Inside Corner</b> ... 22 XICLP
	<b>Low Profile Plank Inside Corner</b> ... 23 XICLP
	<b>Panel Inside Corner</b> ..... 21 XIC US Patent #5,960,598


## XtremeTrim® Outside Corner

	<b>3-1/2" Outside Corner</b> ..... 31 XOC
	<b>Batten Corner</b> ..... 19 XOCBN
	<b>Blunt Panel Outside Corner</b> ..... 26 XOCBL
	<b>Bullnose Outside Corner</b> ..... 30 XOCB
	<b>Butted Outside Corner</b> ..... 27 XOCBT
	<b>Low Profile Outside Corner</b> ..... 24 XOCPL
	<b>Reveal Outside Corner</b> ..... 25 XOCR
	<b>Transition Outside Corner</b> ..... 28 XOCB

## XtremeTrim® Soffit Transition Trim

	<b>F Reveal</b> ..... 32 FR
	<b>Starter Strip</b> ..... 32 XS

## XtremeTrim® Starter Strip

	<b>Starter Strip</b> ..... 33 XS
---	-------------------------------------

## Alphabetical Listing

BRH	Horizontal Bead Reveal	9
BRV	Vertical Bead Reveal	8
CQZ	Horizontal Z	15
FR	F Reveal	32
JMH	J Mold	11
JMS	J Mold	11
PF	Plank Flash	35
PLPF	ProLine Plank Flash	35
RH	Horizontal Reveal	16
RHB	Horizontal Board Reveal	17
RHBG	Horizontal Board Reveal	17
RV	Vertical Reveal	12
RVB	Vertical Board Reveal	13
RVBG	Vertical Board Reveal	13
RVBN	Vertical Batten Reveal	18
RVT	Transition Vertical Reveal	14
SHM	Siding H Mold	7
TM	Vertical T Mold	10
XHM	Standard H Mold	6
XIC	Inside Corner	20
XICB	Bullnose Inside Corner	29
XICLP	Low Profile Inside Corner	22
XOC	Outside Corner	12
XOCB	Bullnose Outside Corner	28
XOCBL	Blunt Panel Outside Corner	26
XOCBN	Batten Corner	19
XOCBT	Butted Outside Corner	27
XOCPL	Low Profile Outside Corner	24
XOCR	Reveal Outside Corner	25
XS	Starter Strip	32
XZH	Horizontal Z	15
XZS	Horizontal Z	15

## What is XtremeTrim®

XtremeTrim® consists primarily of extruded aluminum profiles for fiber cement siding & soffit and other materials.

XtremeTrim® profiles are designed to work together as a system to create an aesthetically attractive and durable appearance.

It is a highly value-added product allowing many different, durable and dramatic design options not available using other materials.








XtremeTrim® extruded items are sustainable trim that is fabricated from custom die-extruded heavy duty 6063 T-5 aluminum alloy with a coating that protects against harsh weather conditions and allows for paint adhesion.

XtremeTrim® is made from 75 to 100 % post industrial and post consumer scrap, extruded aluminum trim meets requirements for sustainability and can contribute to LEED® points.

## Painting Guide

Use Direct to Metal (DTM) paint with XtremeTrim®; consult with your local paint manufacturer for best practice and proper painting methods. Always follow the paint manufacturer's recommendations to apply.

## Soffit / Ventilation Products

	<b>Ezvent® EZV</b> .....	37
	<b>Hat Shaped Vent CUV</b> .....	37
	<b>Snapvent® SV</b> .....	36
	<b>Soffit H-Mold (soffit use only) HM</b> .....	38
	<b>Soffit Vent Connector Clip CONNCLIP</b> .....	38
	<b>Vent Strip VSJ</b> .....	39
	<b>Weep Strip VSZ</b> .....	39

### PVC Trim Painting Guide

Tamlyn PVC Trim may be painted to achieve a custom color.

Use a light color, 100% acrylic latex paint with a light reflective value (LRV) of 55 or higher (Flat Black=0, pure white=100). Painting PVC trim with dark colors may cause the product to warp.

Tamlyn does not recommend painting our PVC products with dark colors unless a good quality heat reflective paint is used such as Sherwin-Williams Vinyl Safe™, and that it is applied according to the paint manufacturer's recommended application instructions.

If a dark color (LRV value of 50 or lower/darker) paint is used, excess solar heat may be absorbed, subjecting the PVC to warping and distortion due to extremes of thermal expansion and contraction. This reaction is even more evident when these parts are exposed to direct sunlight in hot climates. Paint adhesion loss, blistering and peeling may also result.

Failure to use heat reflective dark color paints on Tamlyn PVC products will void warranty and Tamlyn will not be responsible for repair or replacement of any resulting damage due to distortion, warping, buckling, shrinkage, paint blistering, or peeling of paint on the PVC products, or repair or replacement of related siding, soffit, or trim products.




















Always follow the paint manufacturer's recommendations to apply.

Make sure Tamlyn PVC Trim is clean and dry before painting.









## Water Management

	<b>TamlynWrap™ Drainable House Wrap DHW</b> .....	50
	<b>Tamlyn Window Tape WS</b> .....	50
	<b>Utility Moisture Flash UMF</b> .....	51
	<b>Tamlyn Color Sealant XB9500</b> .....	51

## XtremeColor Flashing

	<b>Angle/Base Flashing BF</b> .....	41
	<b>Angle/Base Flashing BFH</b> .....	41
	<b>Angle/Base Flashing BFHH</b> .....	41
	<b>Angle/Base Flashing BFRH</b> .....	41
	<b>Angle Roof Edge ME</b> .....	42
	<b>Angle Roof Edge MG</b> .....	42
	<b>Brick/Stone Ledger Flashing BL</b> .....	48
	<b>Counter Flashing 2TF</b> .....	40
	<b>Counter Flashing F2TF</b> .....	40
	<b>Counter Flashing CF</b> .....	40
	<b>Counter Flashing FTF4</b> .....	40
	<b>Deck Ledger Flashing VWF</b> .....	44
	<b>Fascia Cap Roof Edge FC</b> .....	43
	<b>Gravel Stop Roof Edge GS</b> .....	43
	<b>Horizontal Transition HBD</b> .....	48
	<b>Individual Outside Corner OCI</b> .....	46
	<b>Inside Corner XIC, XICJ, XICS</b> .....	45
	<b>J Flashing JMF</b> .....	47
	<b>Kick Out Flashing KOFL, KOFR</b> .....	49
	<b>Outside Corner XOCBT</b> .....	45

## XtremeColor Flashing

	<b>Overhang Roof Edge DL</b> .....	42
	<b>Parapet/Coping Flashing PCF</b> .....	47
	<b>Reglet Flashing RF</b> .....	40
	<b>Reglet Flashing RF</b> .....	40
	<b>Step Flashing FS</b> .....	41
	<b>Window Flashing VWF</b> .....	44
	<b>XtremeCoil TC</b> .....	49
	<b>Z Flashing VZB</b> .....	46

## Alphabetical Listing

BF .....	Angle/Base Flashing .....	41
BFH .....	Angle/Base Flashing .....	41
BFHH .....	Angle/Base Flashing .....	41
BFRH .....	Angle/Base Flashing .....	41
ME .....	Angle Roof Edge .....	42
MG .....	Angle Roof Edge .....	42
BL .....	Brick/Stone Ledger Flashing .....	48
2TF .....	Counter Flashing .....	40
F2TF .....	Counter Flashing .....	40
CF .....	Counter Flashing .....	40
FTF4 .....	Counter Flashing .....	40
VWF .....	Deck Ledger Flashing .....	44
FC .....	Fascia Cap Roof Edge .....	43
GS .....	Gravel Stop Roof Edge .....	43
HBD .....	Horizontal Transition .....	48
OCI .....	Individual Outside Corner .....	46
XIC .....	Inside Corner .....	45
XICJ .....	Inside Corner .....	45
XICS .....	Inside Corner .....	45
JMF .....	J Flashing .....	47
KOFL .....	Kick Out Flashing .....	49
KOFR .....	Kick Out Flashing .....	49
XOCBT .....	Outside Corner .....	45
DL .....	Overhang Roof Edge .....	42
PCF .....	Parapet/Coping Flashing .....	47
RF .....	Reglet Flashing .....	40
FS .....	Step Flashing .....	41
VWF .....	Window Flashing .....	44
TC .....	XtremeCoil .....	49
VZB .....	Z Flashing .....	46



HardiePanel, HardiePlank, HardieSoffit, JamesHardie, Recommended logo are trademarks or registered trademarks of James Hardie Technology Limited

## Limited Warranty

Tamlyn warrants defective-free products for a period of 10 years for the original purchaser unless otherwise stated for the specific product ordered. Tamlyn products are further warranted as to adequacy of design, provided products are properly specified and installed. This warranty does not apply in the event products are altered in any way or are improperly installed. Liability is limited to replacement of products proven to be defective. Tamlyn has made no other warranty, express or implied, regarding its products, including but not limited to, any warranty regarding merchantability or fitness for a specific purpose. Any claim that a product is defective must be brought within 1 month of the date of installation of such products to the original purchaser. Customer hereby agrees that no other incidental or consequential damages are the responsibility of Tamlyn.

The following voids any warranty regarding Tamlyn products:

- Product has been improperly installed
- Accepted siding installation methods have not been followed
- Building codes have not been followed
- The building envelope has not been properly installed
- Products not installed by a contractor/installer with common knowledge of the building industry

Responsibility remains with the architect or engineer, contractor and owner for the design, application and proper installation of each Tamlyn product. Specifier and user shall determine the suitability of products for specific application and assume all responsibilities in connection there within.

**XtremeTrim®** - Aluminum does not rust, however it does corrode. XtremeTrim® has a protective coating to cover the bare aluminum. When making cuts on XtremeTrim® recoating will be required at ends, surface scratches or when performing form cuts. Failure to do this voids your warranty. For answers to your technical questions on recoating consult your local paint manufacturer before installation. Please refer to XtremeTrim® painting guide.

**PVC Trim** - The PVC TAMLYN buys is an industry-standard, rigid, durable, chemically resistant product designed for outdoor weatherability. While the PVC is paintable, we cannot know what may be added to paints, primers etc. that could affect the PVC. Installers must consult with the paint manufacturer recommendations on priming and painting PVC. Where parts are designed to work together, TAMLYN vinyl products are not warranted if installed in conjunction with other non-Tamlyn vinyl products.

TAMLYN PVC Trim may be painted to achieve a custom color. Use a light color, 100% acrylic latex paint with a light reflective value (LRV) of 55 or higher (Flat Black=0, pure white=100). Painting PVC trim with dark colors may cause the product to warp. TAMLYN does not recommend painting our PVC products with dark colors. If a dark color (LRV value of 50 or lower/darker) paint is used, excess solar heat may be absorbed, subjecting the PVC to warping and distortion due to extremes of thermal expansion and contraction. This reaction is even more evident when these parts are exposed to direct sunlight in hot climates. Paint adhesion loss, blistering and peeling may also result.

TAMLYN will not be responsible for repair or replacement of any resulting damage due to distortion, warping, buckling, shrinkage, paint blistering, or peeling of paint on the PVC products, or repair or replacement of related siding, soffit, or trim products if dark colors were used.

Follow the paint manufacturer's recommendations to apply. Make sure TAMLYN PVC Trim is clean and dry before painting.

**Please follow siding manufacturers best practice application when installing any Tamlyn accessory. Xtreme Trim™ profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope. Xtreme Trim™ products are not part of an Exterior Insulation Finishing System (EIFS) and are not designed or intended to be used in an EIFS or similar system.**

Note re flammability: PVC products will not support or spread flames. They are self-extinguishing as soon as the flame source is removed.

## About Tamlyn

TAMLYN was established in May 1971 by Ron Tamlyn, Sr. with \$800 borrowed money and help from his wife, Jean, in a small shack in the back yard of their modest home in Bellaire, Texas. We remain family-owned to this day. Our history is one of quality, innovation, and proven performance. We are proud to represent the manufacturing end of the building products industry, and remain a competitive manufacturer committed to making products in America, giving customers a choice and not putting all their eggs in an uncertain import basket. An overwhelming majority of our products are still made in the USA. We believe it matters in helping America keep control of its destiny.

Tamlyn manufactures Xtreme Trim® for fiber cement, roofing products and structural metal products for stronger homes and buildings that will hold together under high wind and seismic forces.

Tamlyn provides a full line of XtremeColor Flashings recommended for use with HardiePanel® and HardiePlank® sidings and other quality siding products. XtremeColor Flashing is recommended by James Hardie because it is made to exactly color match their pre-finished fiber cement sidings to comply with their warranty. Tamlyn provides tough, weather-resistant coatings for a long lasting beauty and low maintenance on XtremeColor Flashing. Easy to install with all fiber cement siding and soffit products.

A very diversified mix of frequently needed building products is available from Tamlyn. We manufacture joist and truss hangers, brick ties, hurricane clips, straps, and holdowns, as well as special and custom welded hangers. Tamlyn structural products are ICC-listed and Florida Building Code-approved. We also make G-185 triple zinc connectors for use with the new ACQ treated wood products.

We offer quality products, competitive prices, and fast service. While we recognize we are in a global economy, we remain committed to making products by choice in the USA, giving customers a quality domestic option.

## Mission Statement

To become a world-class and world-wide supplier of quality building products. We will help build the dream of better homes, continually innovating, while honoring our heritage as a family business that values all employees, making Tamlyn a rewarding place to work. We will promote positive, lasting relationships with customers, providing excellent products at fair prices with superior service. We commit to be good stewards of our resources to leave Tamlyn in a stronger position for the next generation, passing these values on and bringing glory to God in all we do.

## Company Directory

### Corporate Headquarters / Plant

13623 Pike Road  
Stafford, Texas 77477  
USA Toll Free 800-334-1676  
Phone: 281-499-9604  
Fax: 281-499-8948  
Technical support: 713-562-5149

### Dallas Plant

10940 Petal Street  
Dallas, Texas 75238  
USA Toll Free 888-416-9676  
Phone: 214-348-9676  
Fax: 214-348-0976

## Color Palette

Colors shown are as accurate as printing methods will permit. Please see actual product sample for true color. Product and color availability vary by region and are subject to change. **There will be color variance lot to lot.**

Arctic White <b>AW</b>	Autumn Tan <b>AT</b>
Boothbay Blue <b>BB</b>	Chestnut Brown <b>CHB</b>
Cobble Stone <b>CS</b>	Countrylane Red <b>CR</b>
Evening Blue <b>EB</b>	Granite Gray <b>GG</b>
Harris Cream <b>HC</b>	Heathered Moss <b>HM</b>
Iron Gray <b>IG</b>	Khaki Brown <b>KB</b>
Light Mist <b>LM</b>	Monterey Taupe <b>MT</b>
Mountain Sage <b>MS</b>	Navajo Beige <b>NB</b>
Sail Cloth <b>SC</b>	Parkside Pine <b>PP</b>
Sandstone Beige <b>SB</b>	Timber Bark <b>TB</b>
Traditional Red <b>TR</b>	Tuscan Gold <b>TG</b>
Woodland Cream <b>WC</b>	Woodstock Brown <b>WB</b>

While we design all our XtremeTrim® with drain dams for vertical runs and shingle fashion for horizontal profiles, its primary design is for aesthetics. XtremeTrim® will not stop all water from penetrating the surface of the cladding. The primary insurance of moisture mitigation for the building envelope is your house wrap, a drainable house wrap. Other options are to use skin venting along with your house wrap. We recommend that you consult your siding manufacturer for best practice application when installing XtremeTrim® with their siding. As all building professionals know, water is the most significant factor in the premature deterioration of buildings, and why proper steps should always be taken to protect the envelope.

Leakage paths exist at any opening in the wall surface, whether intended or unintended. Joints between materials and around windows and doors, vents, cracks, and porous surfaces are all potential entry points for water. This is why all roof parapets must be properly sealed with flashing membrane and all windows and door openings flashed in shingle fashion.

All XtremeTrim® profiles do not form a moisture management system. The architect, builder, designer and contractor are responsible for designing and installing a code compliant building envelope. Below are the code minimum requirements.

**Tamlyn XtremeTrim® products are not part of an EIFS system and not designed or intended to be used in an EIFS or similar system.**

## INTERNATIONAL RESIDENTIAL CODE 2006

### WALL COVERING - SECTION R703 EXTERIOR COVERING

**R703.1 General.** Exterior walls shall provide the building with a weather-resistant exterior wall envelope. The exterior wall envelope shall include flashing as described in Section R703.8. The exterior wall envelope shall be designed and constructed in such a manner that prevents the accumulation of water within the wall assembly by providing a water-resistant barrier behind the exterior veneer as required by Section R703.2 and a means of draining water that enters the assembly to the exterior.


**R703.8. Flashing.** Approved corrosion-resistant flashing shall be applied shingle-fashion in such a manner to prevent entry of water into the wall cavity or penetration of water to the building structural framing components. The flashing shall extend to the surface of the exterior wall finish. Approved corrosion-resistant flashings shall be installed at all of the following locations:

### EXTERIOR WALLS - SECTION 1403 PERFORMANCE REQUIREMENTS


**IBC § 1403.2: Weather protection.** Exterior walls shall provide the building with a weather resistant exterior wall envelope. The exterior wall envelope shall include flashing, as described in Section 1405.3. The exterior wall envelope shall be designed and constructed in such a manner as to prevent the accumulation of water within the wall assembly by providing a water-resistant barrier behind the exterior veneer, as described in Section 1404.2, and a means for draining water that enters the assembly to the exterior. Protection against condensation in the exterior wall assembly shall be provided in accordance with the International Energy Conservation Code.

Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

## Best Practices Installation Option #1

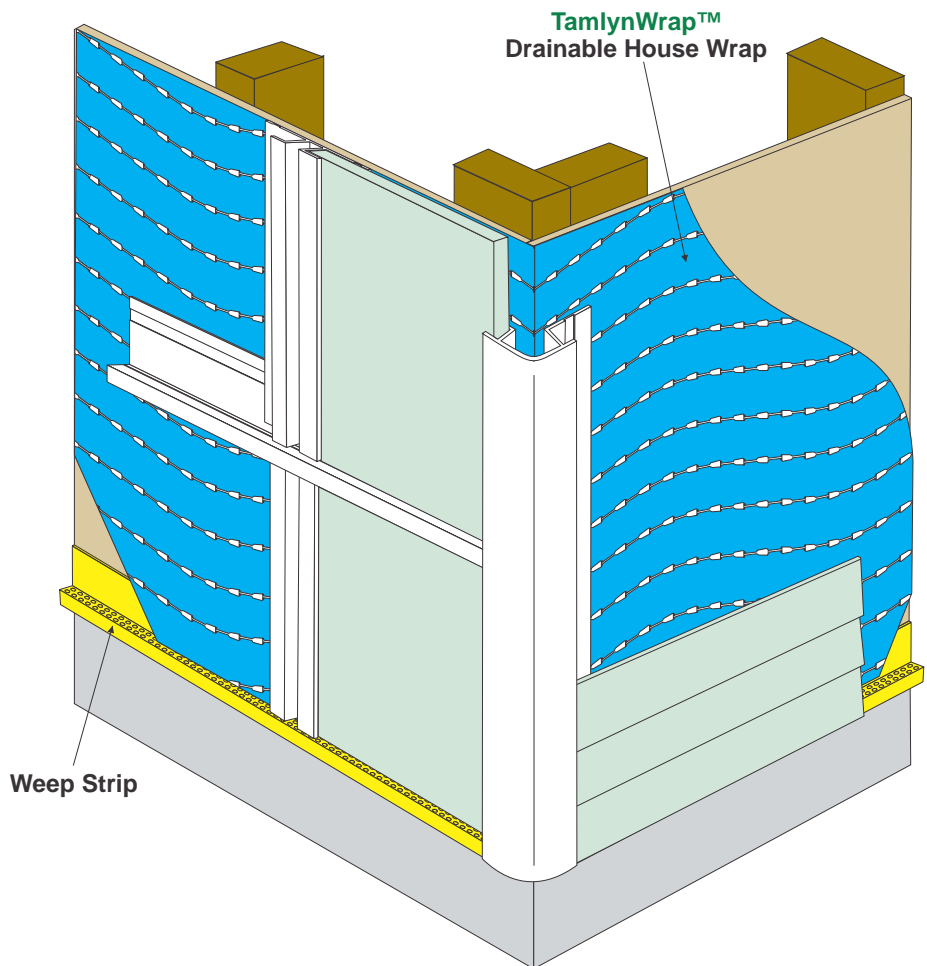


## Best Practices Installation Option #2

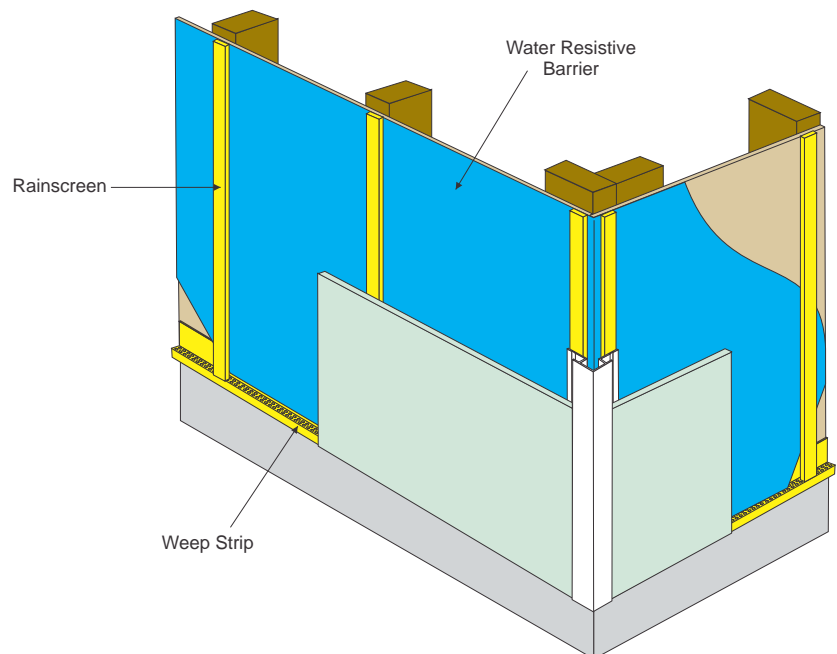

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

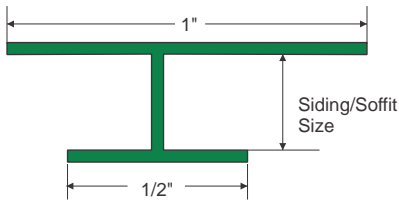

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
XHM148	1/4" (6mm)	8'
XHM5168	5/16" (8mm)	8'

**DESIGN FEATURE:** Designed to work as a system component with Tamlyn vinyl soffit vent products. Covers the end seams of the soffit material and vents, providing a cleaner transition than simply butting the vents and panels end to end.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturers best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.



**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® H-Mold at horizontal joints is not recommended.



Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

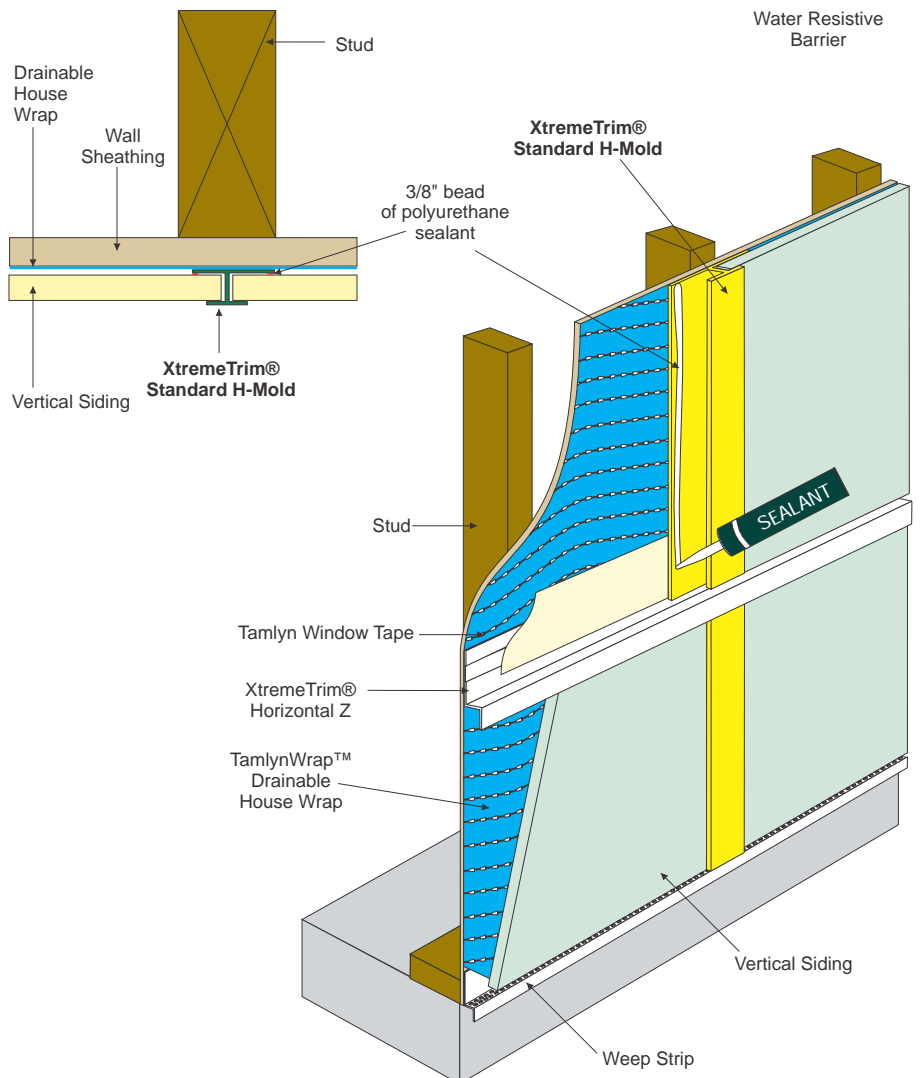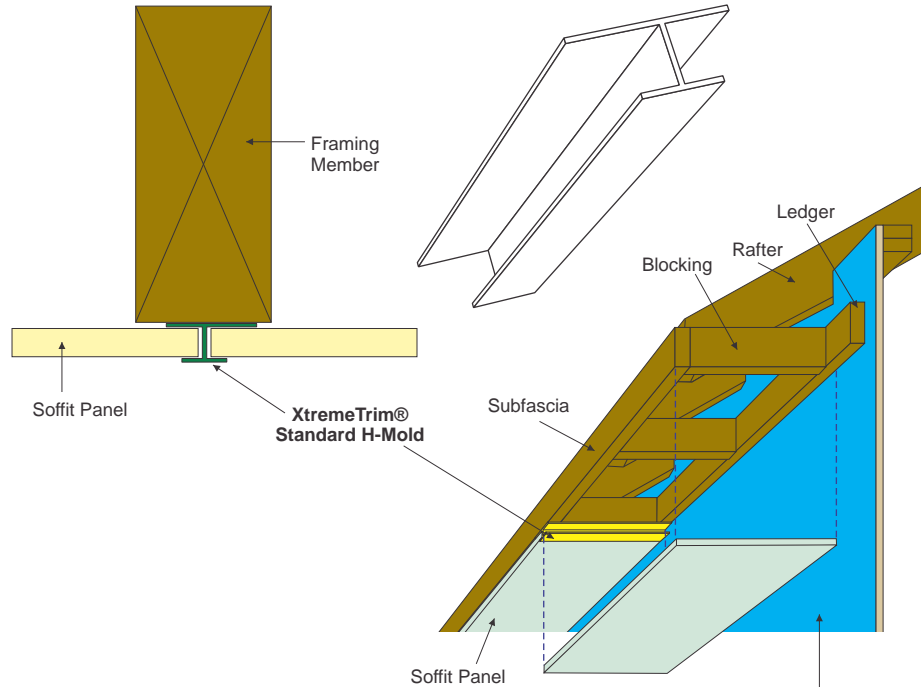


# XtremeTrim® Vertical Siding H-Mold



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

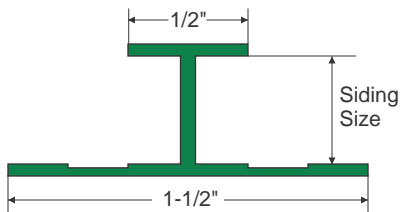

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
SHM5168	5/16" (8mm)	8'
SHM51610	5/16" (8mm)	10'
SHM7168	7/16" (11mm)	8'
SHM71610	7/16" (11mm)	10'
SHM588	5/8" (16mm)	8'
SHM5810	5/8" (16mm)	10'

**DESIGN FEATURE:** Designed to cover vertical joints in vertical siding. Longer lasting and more effective than contractor grade caulk. Provides a smooth seam at joints.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® Vertical Siding H-Mold at horizontal joints is not recommended.




Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

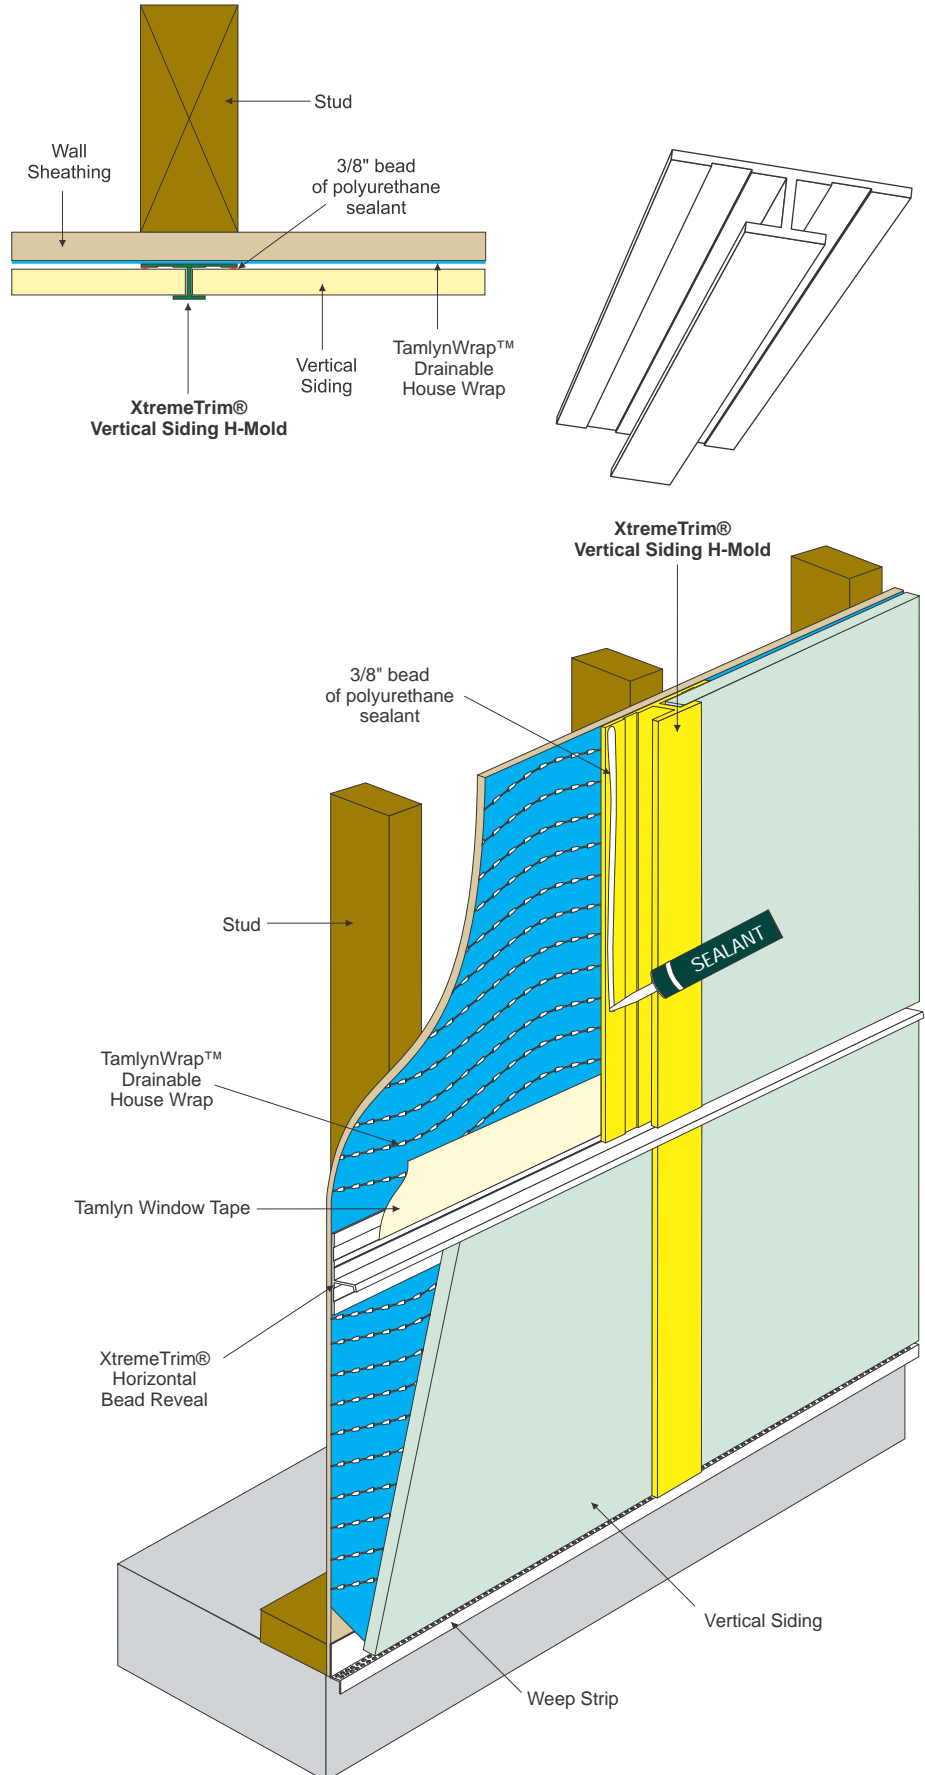

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

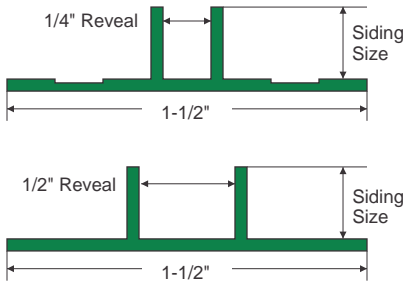

### AVAILABLE SIZES:

ITEM ID	REVEAL	SIDING SIZE	LENGTH
BRV14516	1/4"	5/16" (8mm)	10'
BRV12516	1/2"	5/16" (8mm)	10'
BRV12716	1/2"	7/16" (11mm)	10'
BRV1258	1/2"	5/8" (16mm)	10'

**DESIGN FEATURE:** XtremeTrim® Vertical Bead Reveal serves as an aesthetic expansion joint between panels on the wall of your home or larger project. Works with all panel profiles/ finishes. A better, more appealing and secure solution to the "open wall" vertical joint look popular in many areas.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® Vertical Bead Reveal at horizontal joints is not recommended.



Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

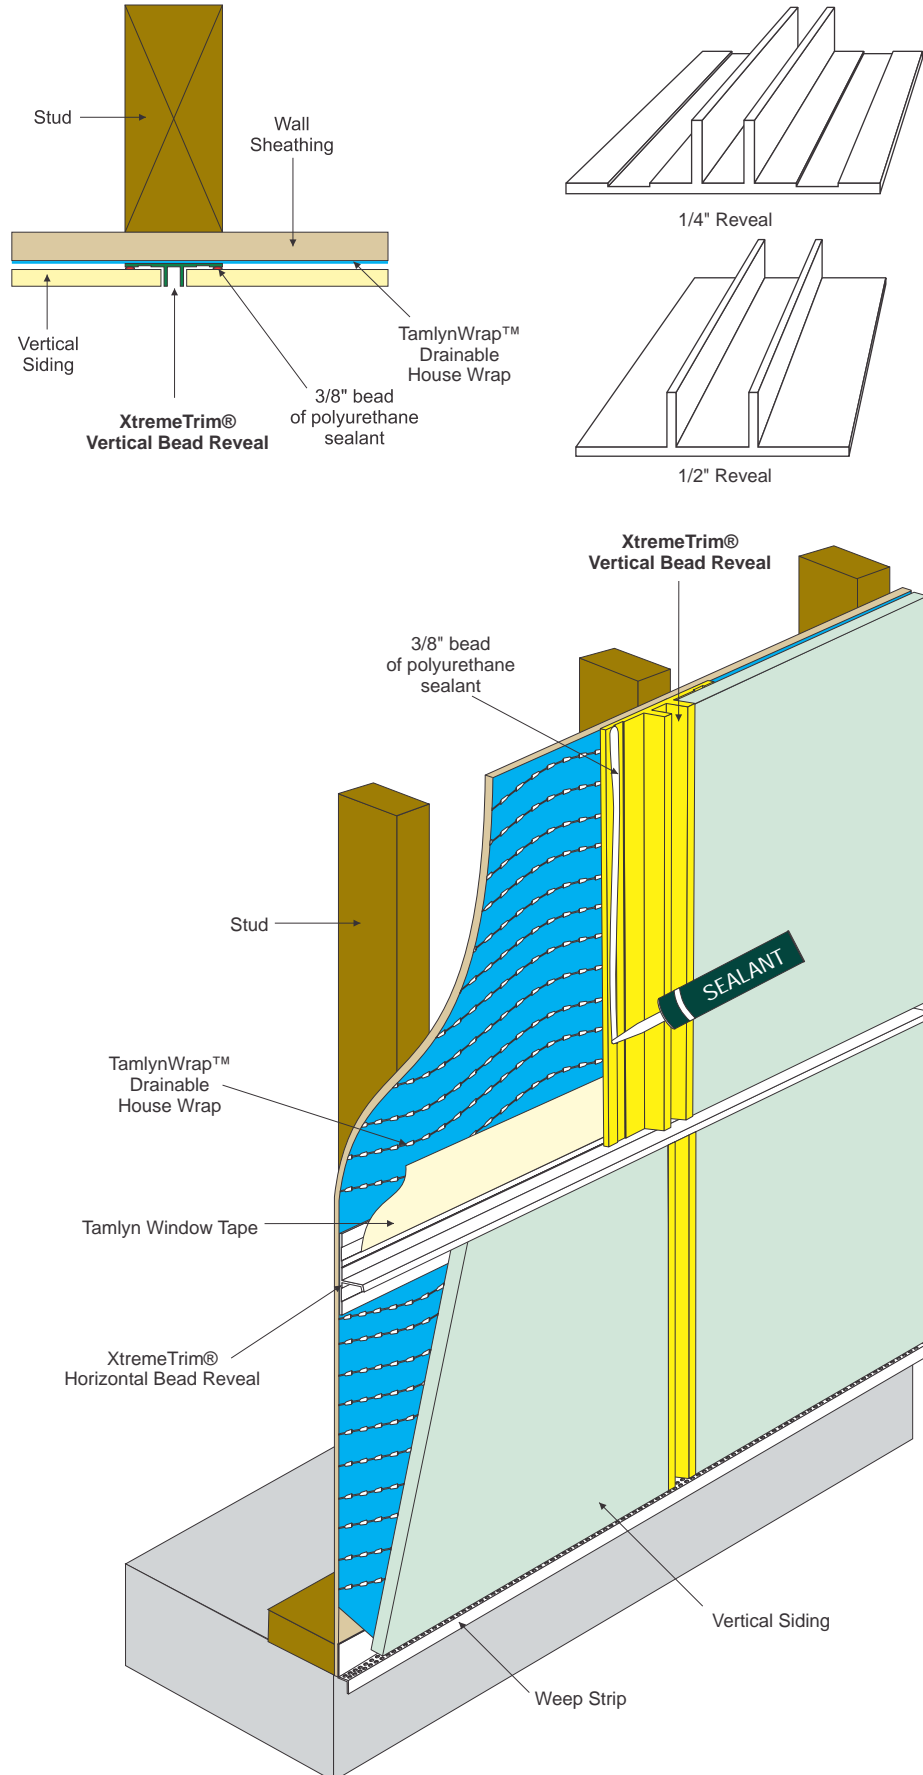




## EXTRUDED ALUMINUM

US Patent #6,032,426, US Trademark #2,358,771

### PRODUCT DETAIL:

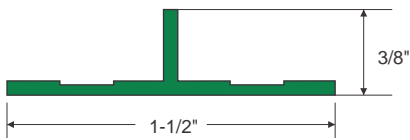

### AVAILABLE SIZES:

ITEM ID	LENGTH
TM158	8'

**DESIGN FEATURE:** XtremeTrim® Vertical Panelseam® T-Mold serves as a minimal exposure expansion joint between panels. Works with all panel profiles/ finishes.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturers best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® Panelseam® T-Mold at horizontal joints is not recommended.




**Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.**

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

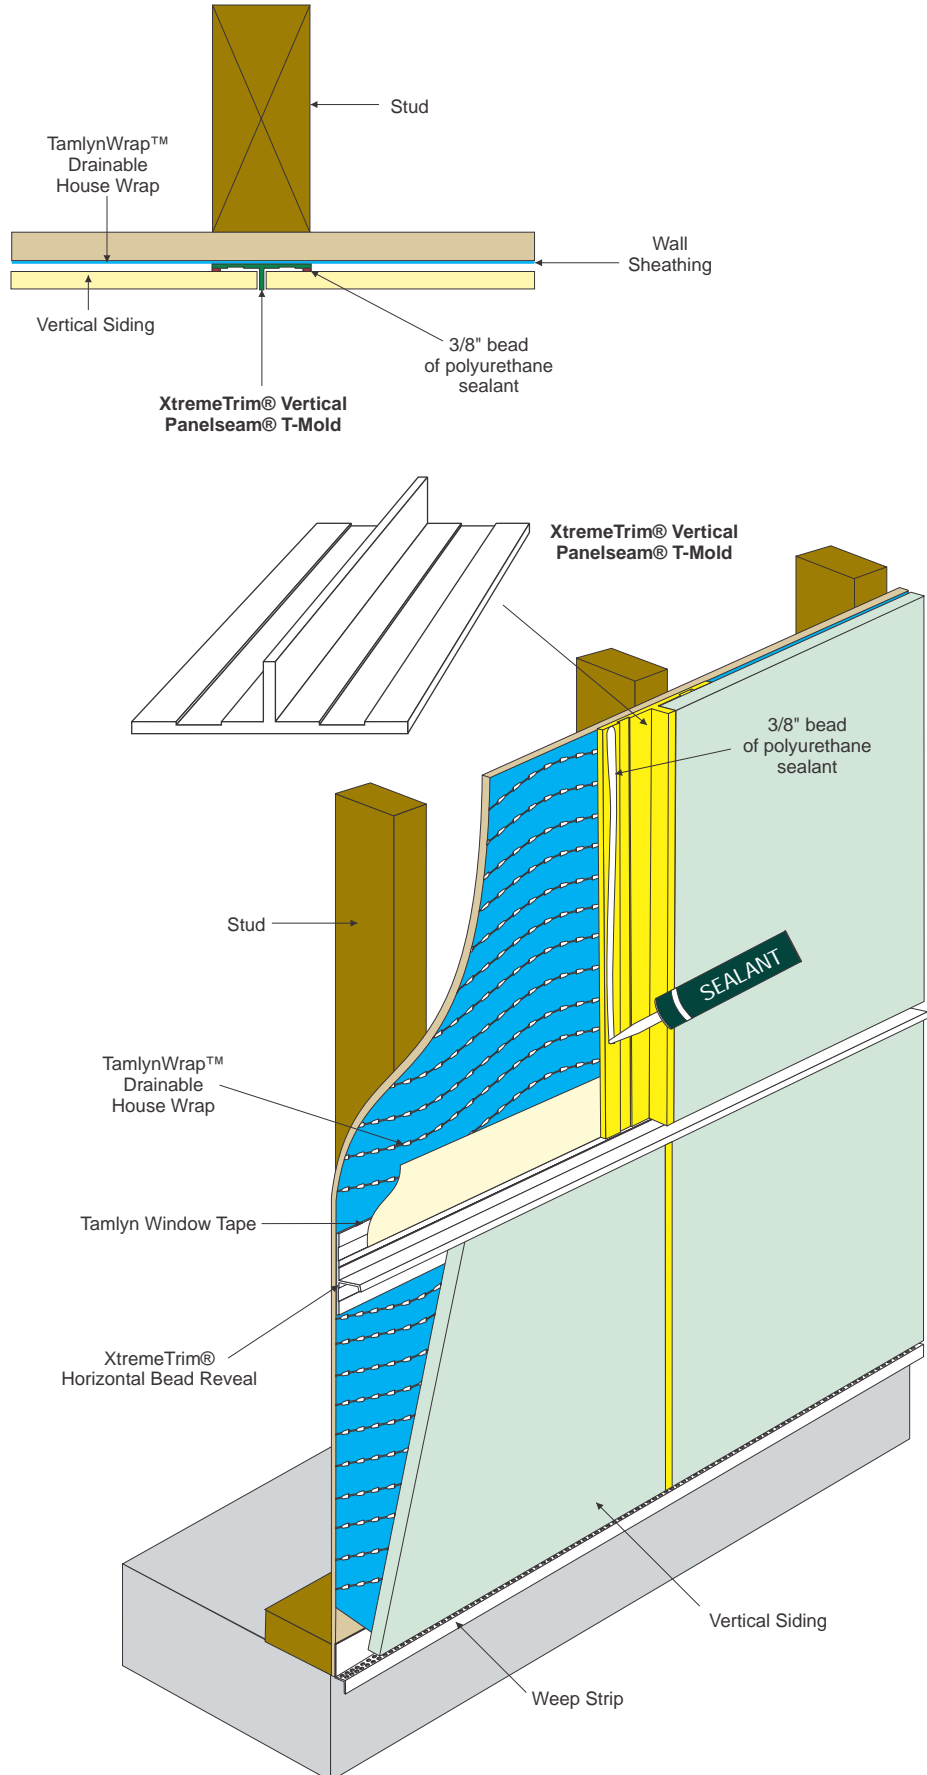

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

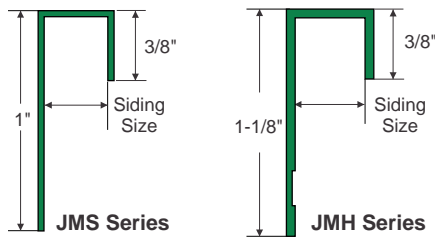

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
JMS5168	5/16" (8mm)	8'
JMS7168	7/16" (11mm)	8'
JMS588	5/8" (16mm)	8'
JMH51610	5/16" (8mm)	10'
JMH71610	7/16" (11mm)	10'
JMH5810	5/8" (16mm)	10'
JMH3410	5/16" Lap Siding	10'

**DESIGN FEATURE:** Provides a cleaner finish at openings and the edges of panels or planks.

**JMH** - Designed to work in conjunction with XtremeTrim® Horizontal Bead Reveal, Vertical Reveal, and Horizontal Z.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** JMH .050" (1.27mm) ± .005  
JMS .037" (0.94mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturers best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Do not install XtremeTrim® J mold on Horizontal applications where the exterior flange can catch water.




Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

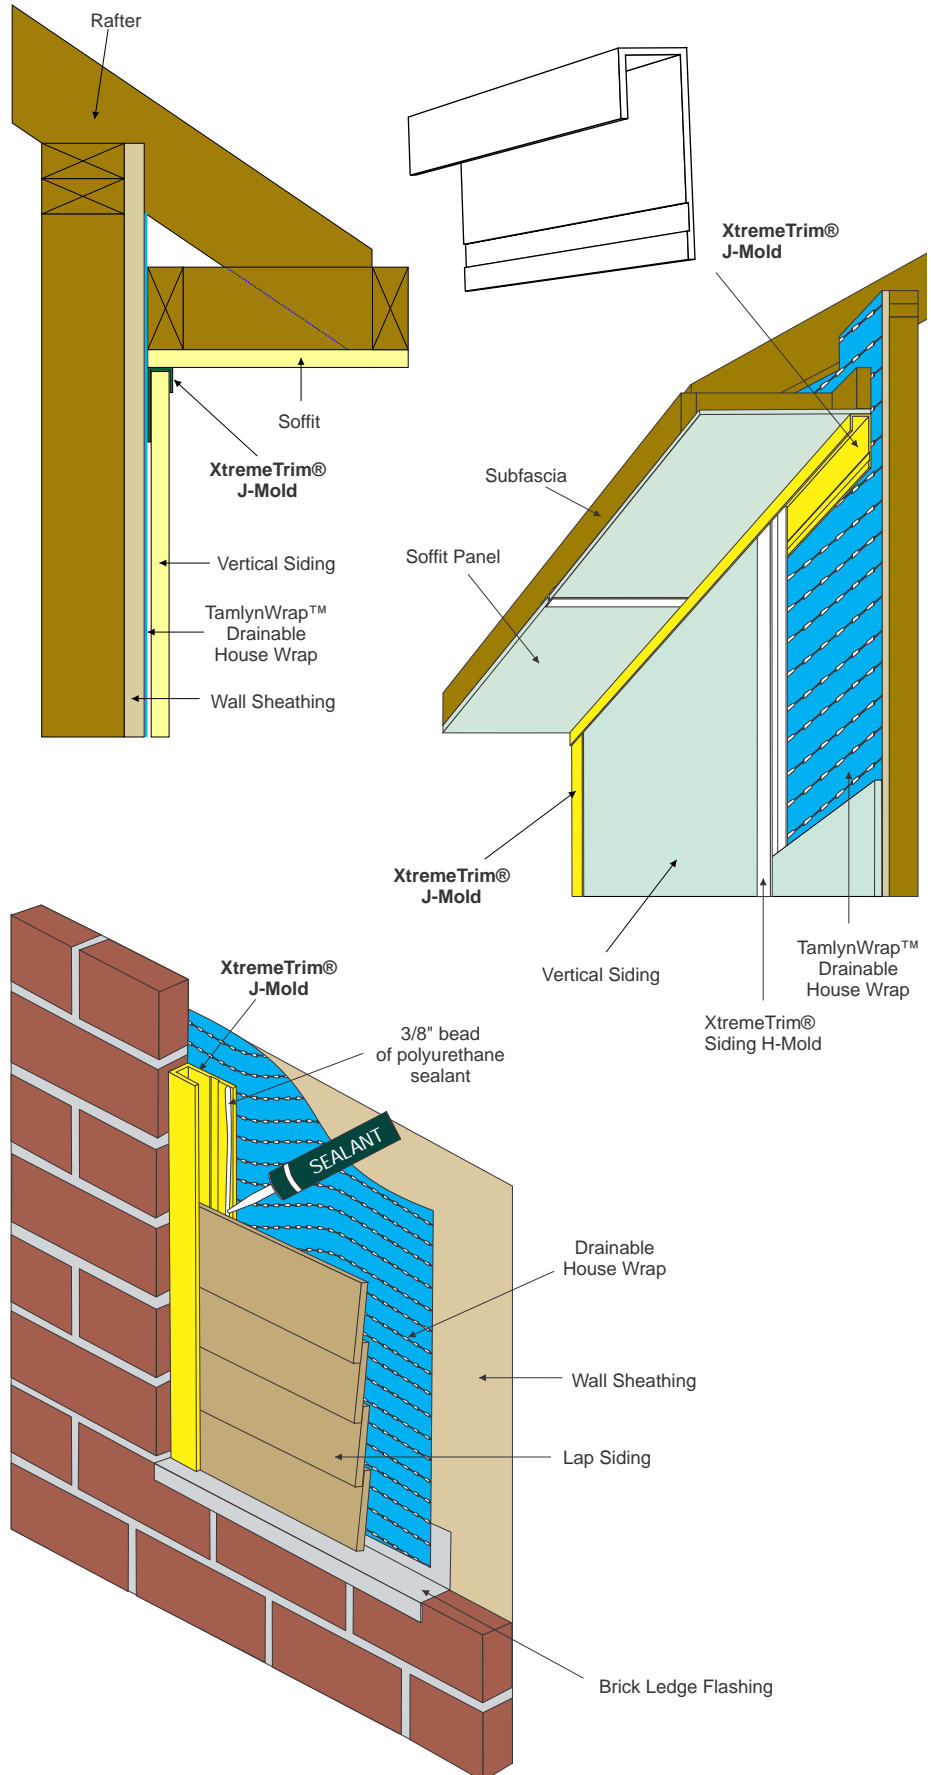

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

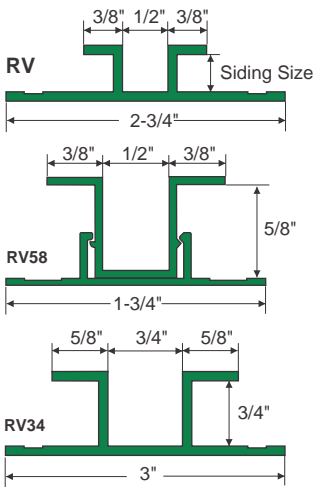

### AVAILABLE SIZES:

ITEM ID	REVEAL	SIDING SIZE	LENGTH
RV516	1/2"	5/16" (8mm)	10'
RV716	1/2"	7/16" (11mm)	10'
RV58	1/2"	5/8" (16mm)	10'
RV34	3/4"	5/16" Lap Siding	10'

**DESIGN FEATURE:** Designed to create a uniform, aesthetically consistent vertical reveal between panels or lap sidings.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® Vertical Reveal at horizontal joints is not recommended.




Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

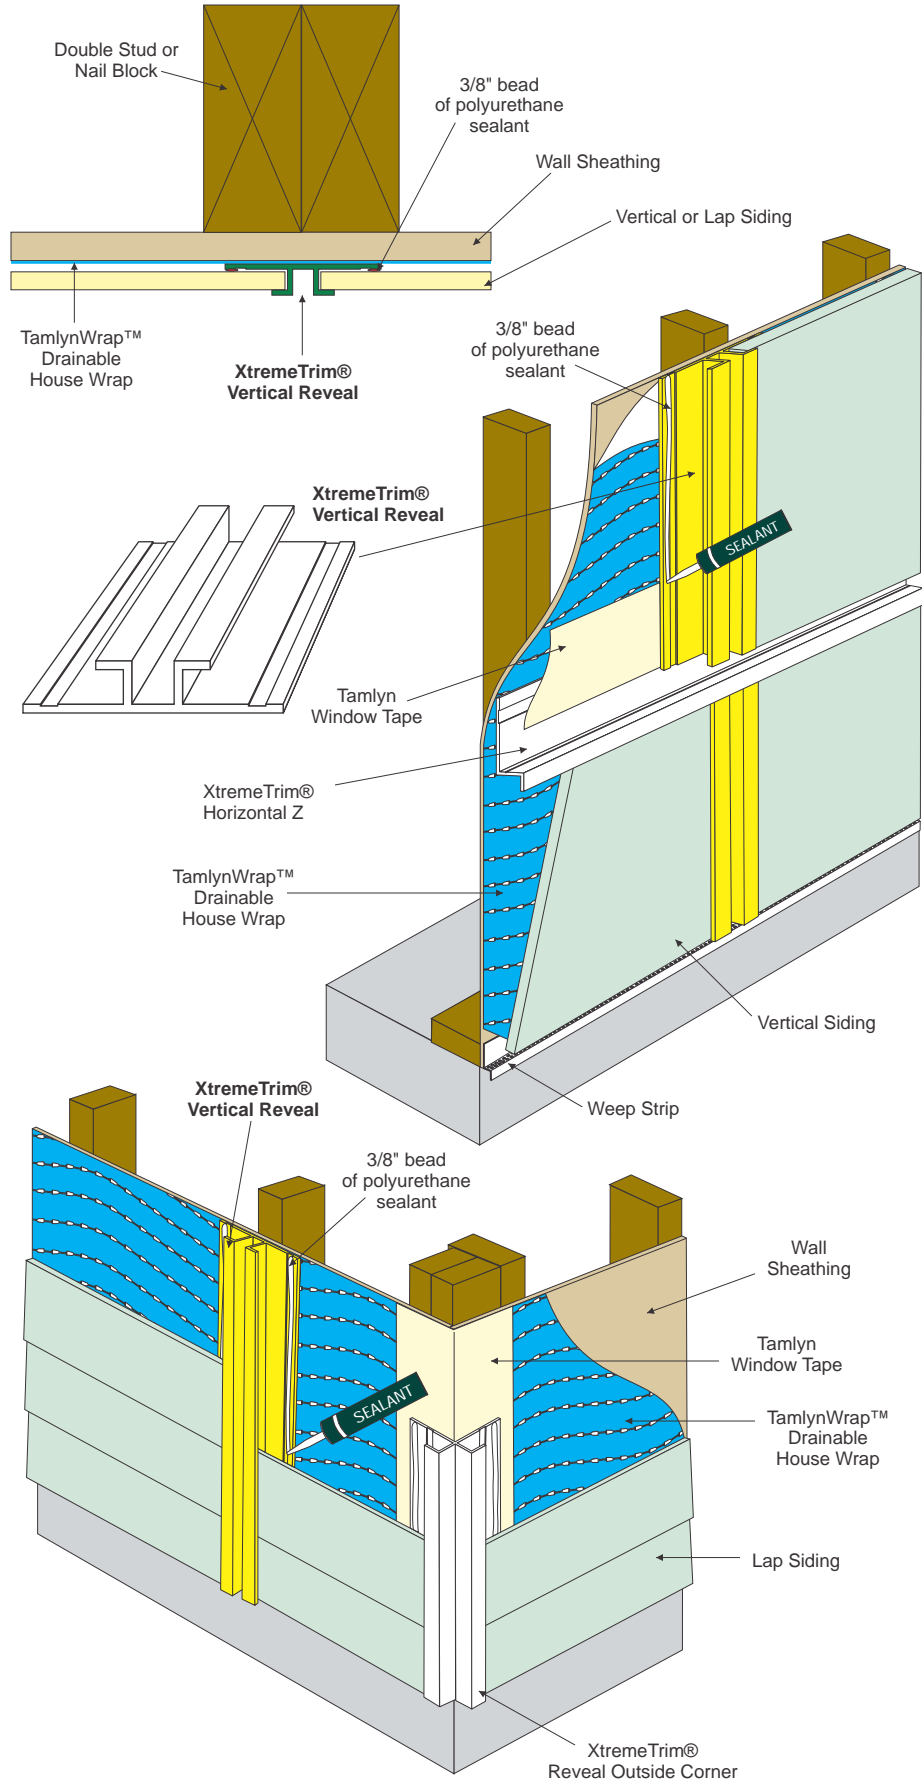

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

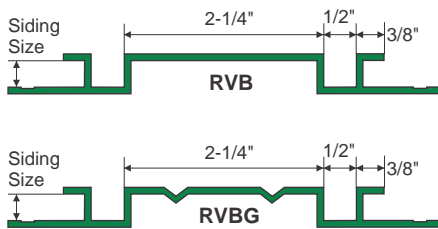

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
RVB516	5/16" (8mm)	10'
RVB716	7/16" (11mm)	10'
RVBG516	5/16" (8mm)	10'
RVBG716	7/16" (11mm)	10'

**DESIGN FEATURE:** Produces a broad vertical accent between siding panels while not protruding beyond the plane of the facade.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® Double Vertical Reveal at horizontal joints is not recommended.




**Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.**

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

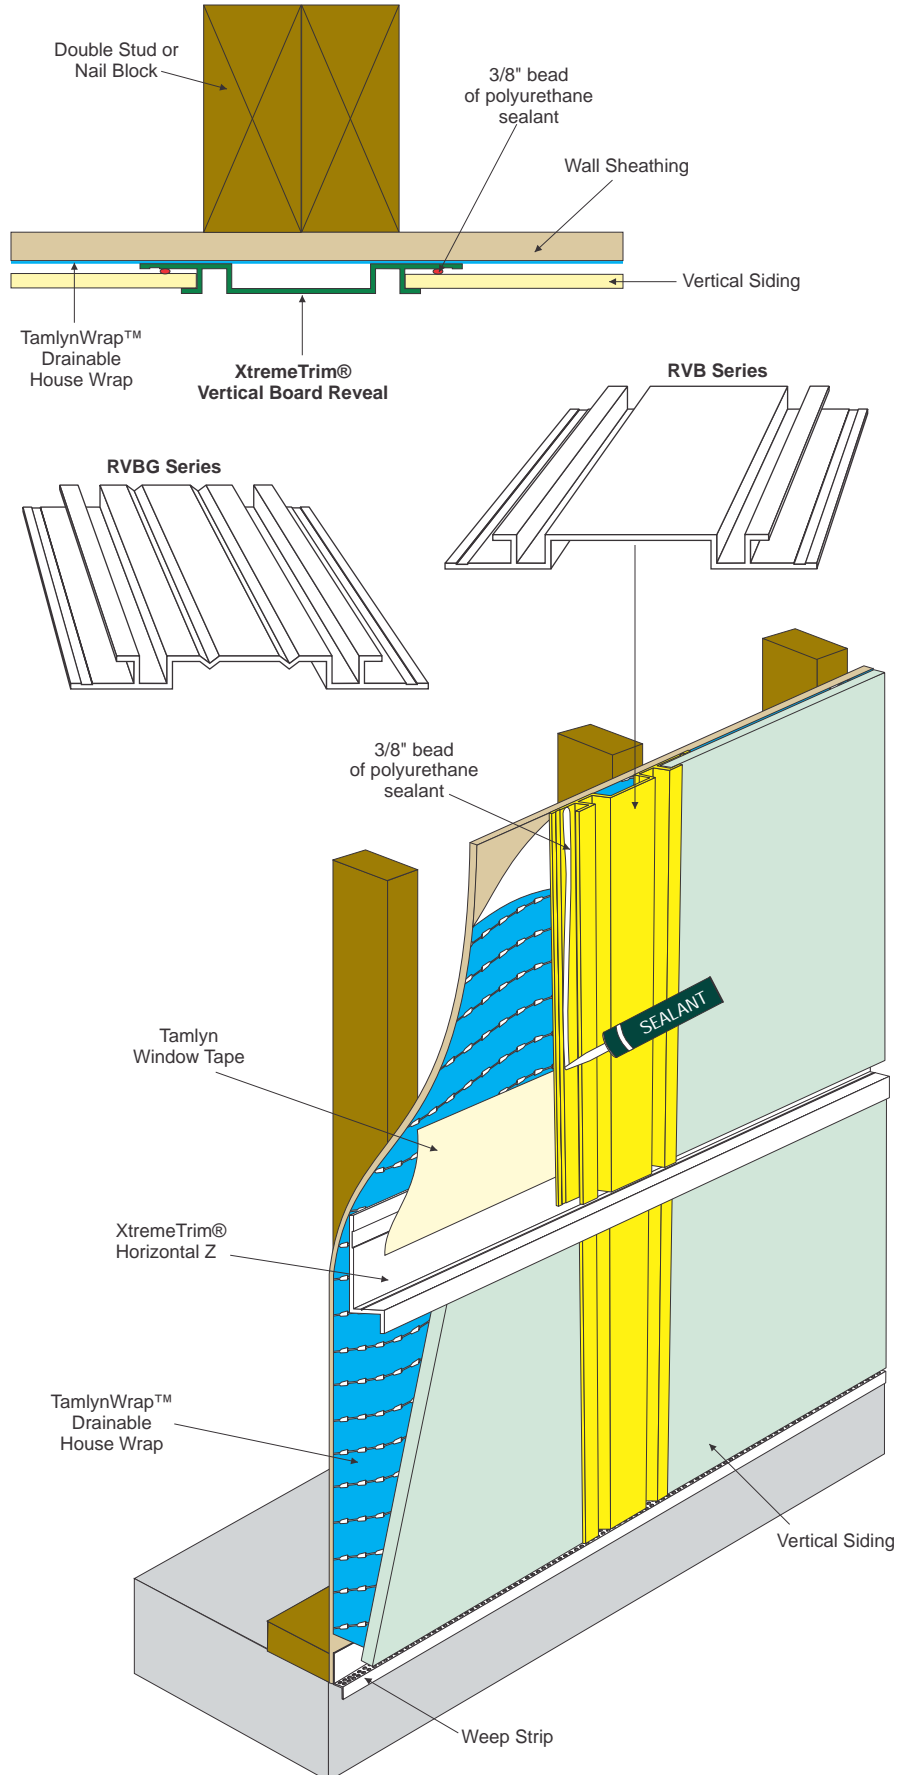

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

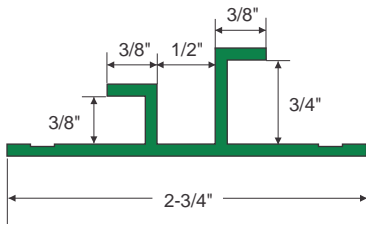

### AVAILABLE SIZES:

ITEM ID	LENGTH
RVT51634	10'

**DESIGN FEATURE:** Designed to create a uniform, aesthetically consistent vertical reveal at transitions between panels and lap sidings.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® Transition Vertical Reveal at horizontal joints is not recommended.




Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

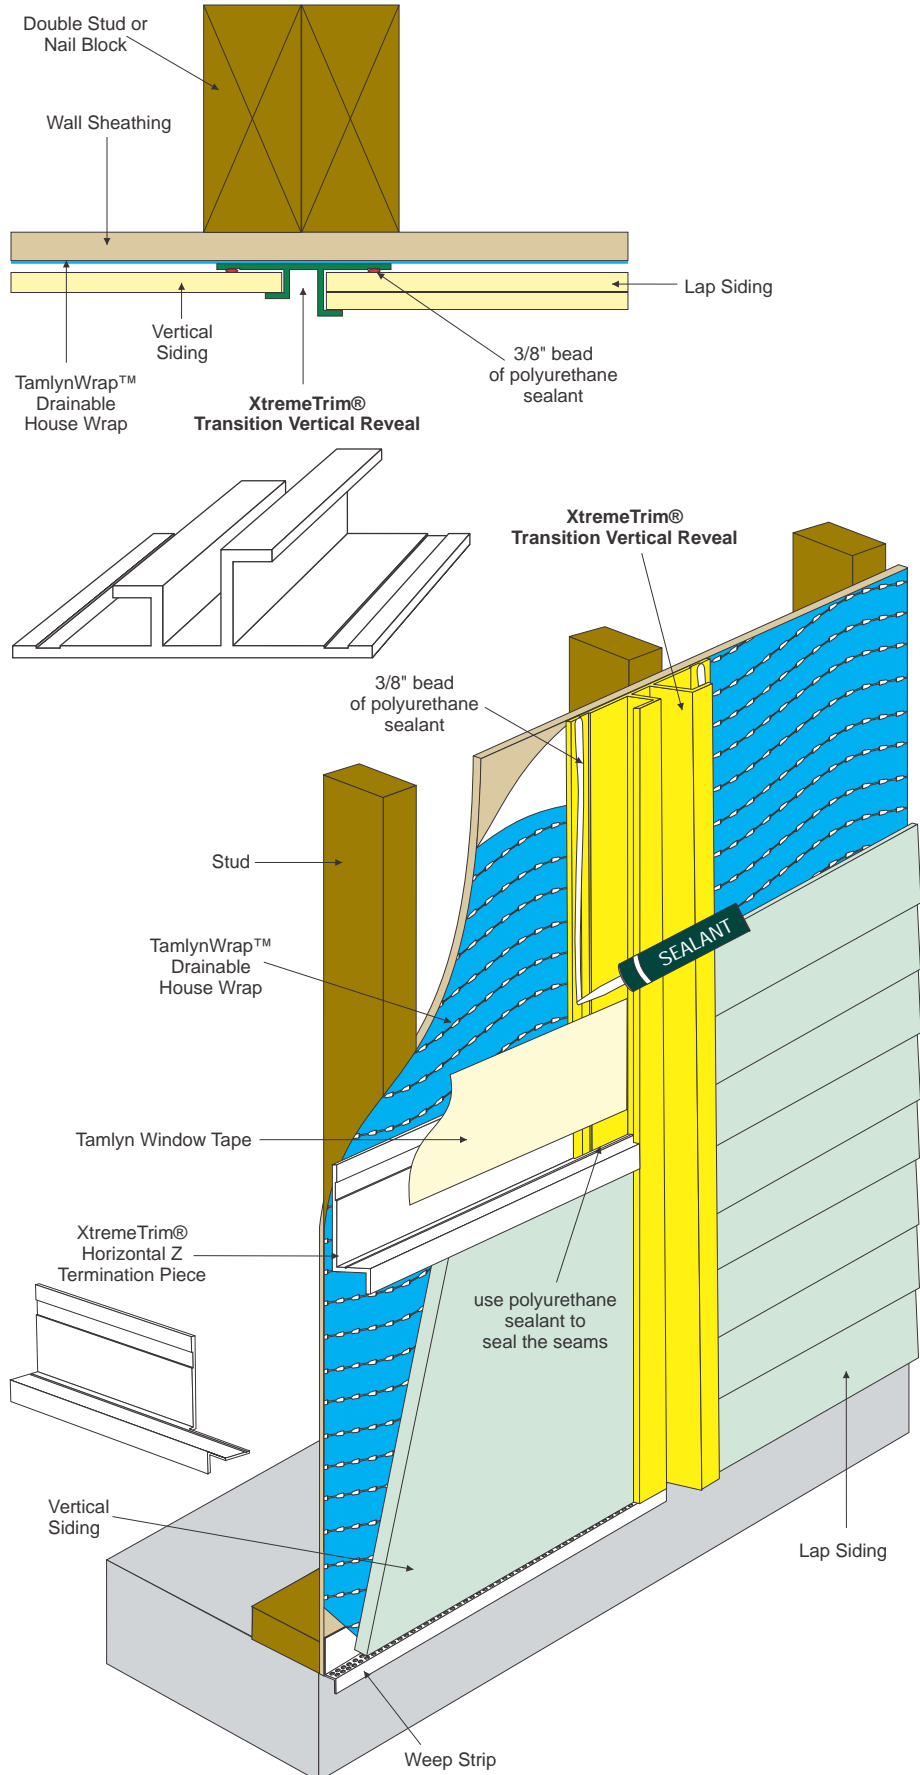

## EXTRUDED ALUMINUM

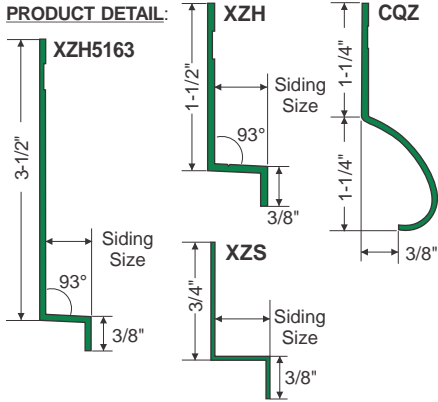

**AVAILABLE SIZES:**

ITEM ID	MAX REVEAL	SIDING SIZE	LTH
XZS5168	1/4"	5/16" (8mm)	8'
XZS7168	1/4"	7/16" (11mm)	8'
XZS588	1/4"	5/8" (16mm)	8'
XZH516	1"	5/16" (8mm)	10'
XZH716	1"	7/16" (11mm)	10'
XZH58	1"	5/8" (16mm)	10'
XZH5163	2-1/2"	5/16" (8mm)	10'
CQZ	3/4"	5/16" (8mm)	10'

**DESIGN FEATURE:** Designed to work in conjunction with XtremeTrim® Vertical Reveal and siding H-Mold. XZH5163 provides greater flexibility in reveal size.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** XZS .030" (0.76mm) ± .005  
CQZ, XZH .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply waterproofing membrane on trim before setting panels to help minimize water intrusion behind siding.

**NOTE:** Do not install XtremeTrim® Horizontal Z on horizontal applications where the exterior flange can catch water.

**Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.**

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

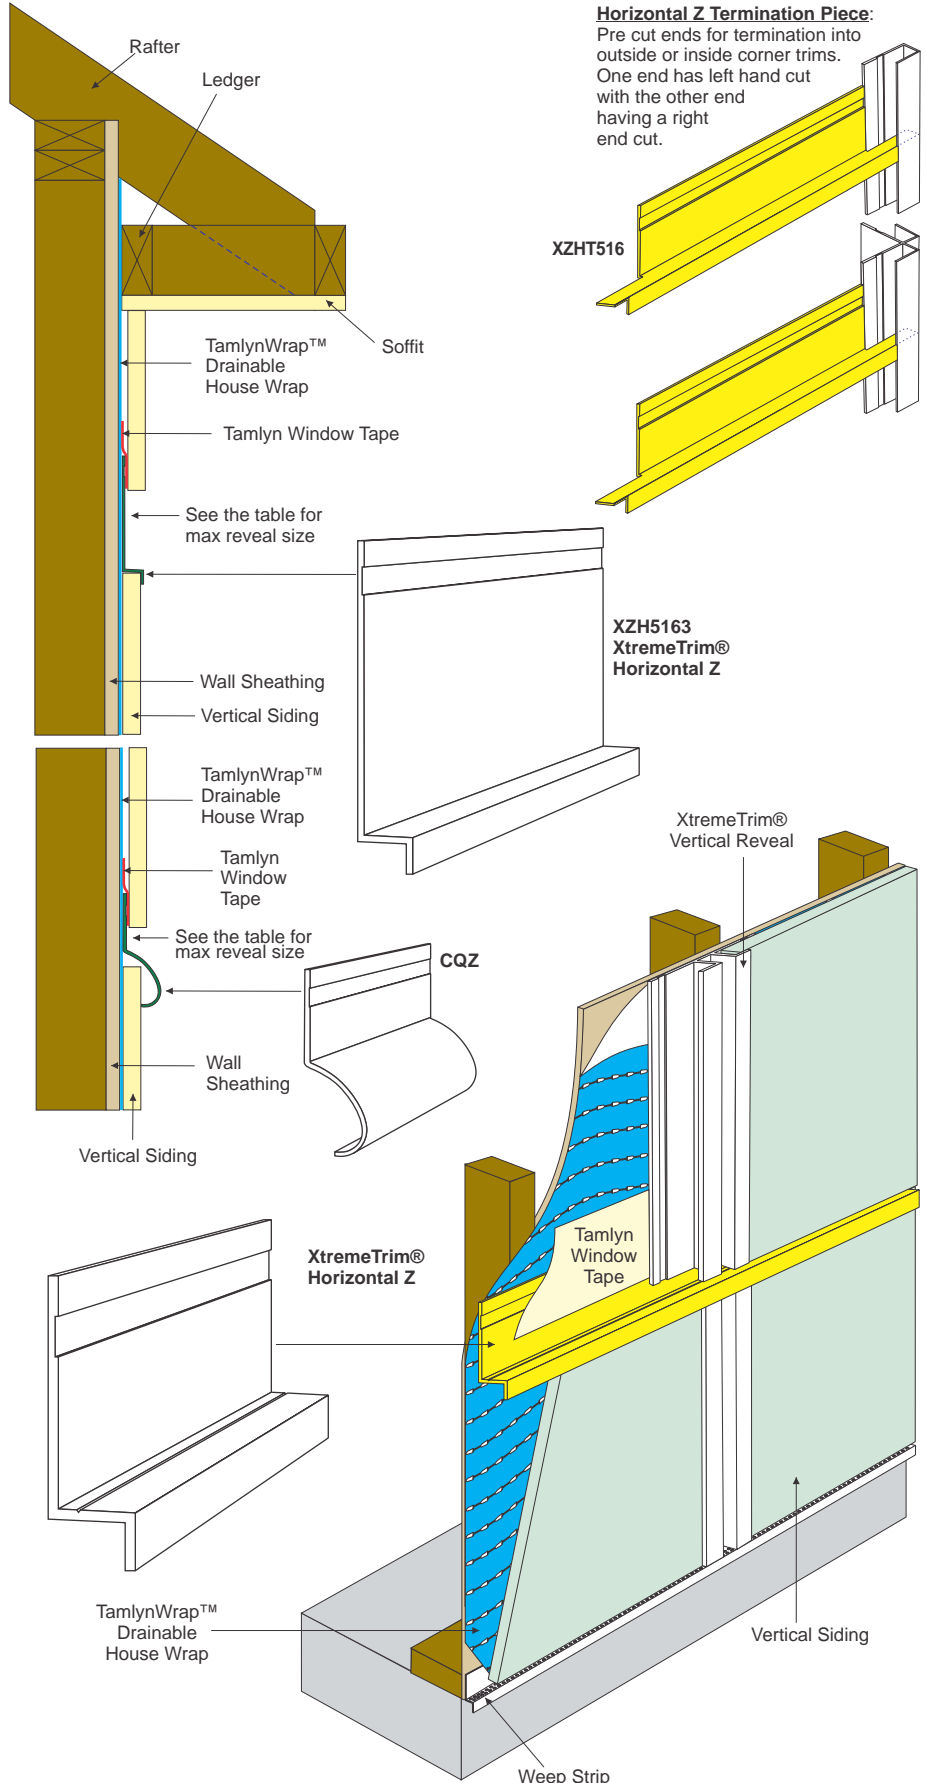

**Horizontal Z Termination Piece:** Pre cut ends for termination into outside or inside corner trims. One end has left hand cut with the other end having a right end cut.

XZHT516

XZH5163  
XtremeTrim®  
Horizontal Z

XtremeTrim®  
Vertical Reveal

XtremeTrim®  
Horizontal Z

Tamlyn Window  
Tape


TamlynWrap™  
Drainable  
House Wrap

Vertical Siding

Weep Strip

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

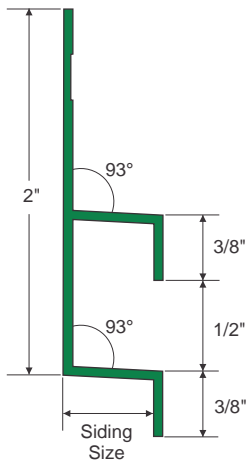

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
RH516	5/16" (8mm)	10'

**DESIGN FEATURE:** Profile gives a horizontal reveal consistent with and complimentary to the Vertical Reveal.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply waterproofing membrane on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Do not install XtremeTrim® Double Horizontal Reveal on horizontal application where the exterior flange can catch water.


Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

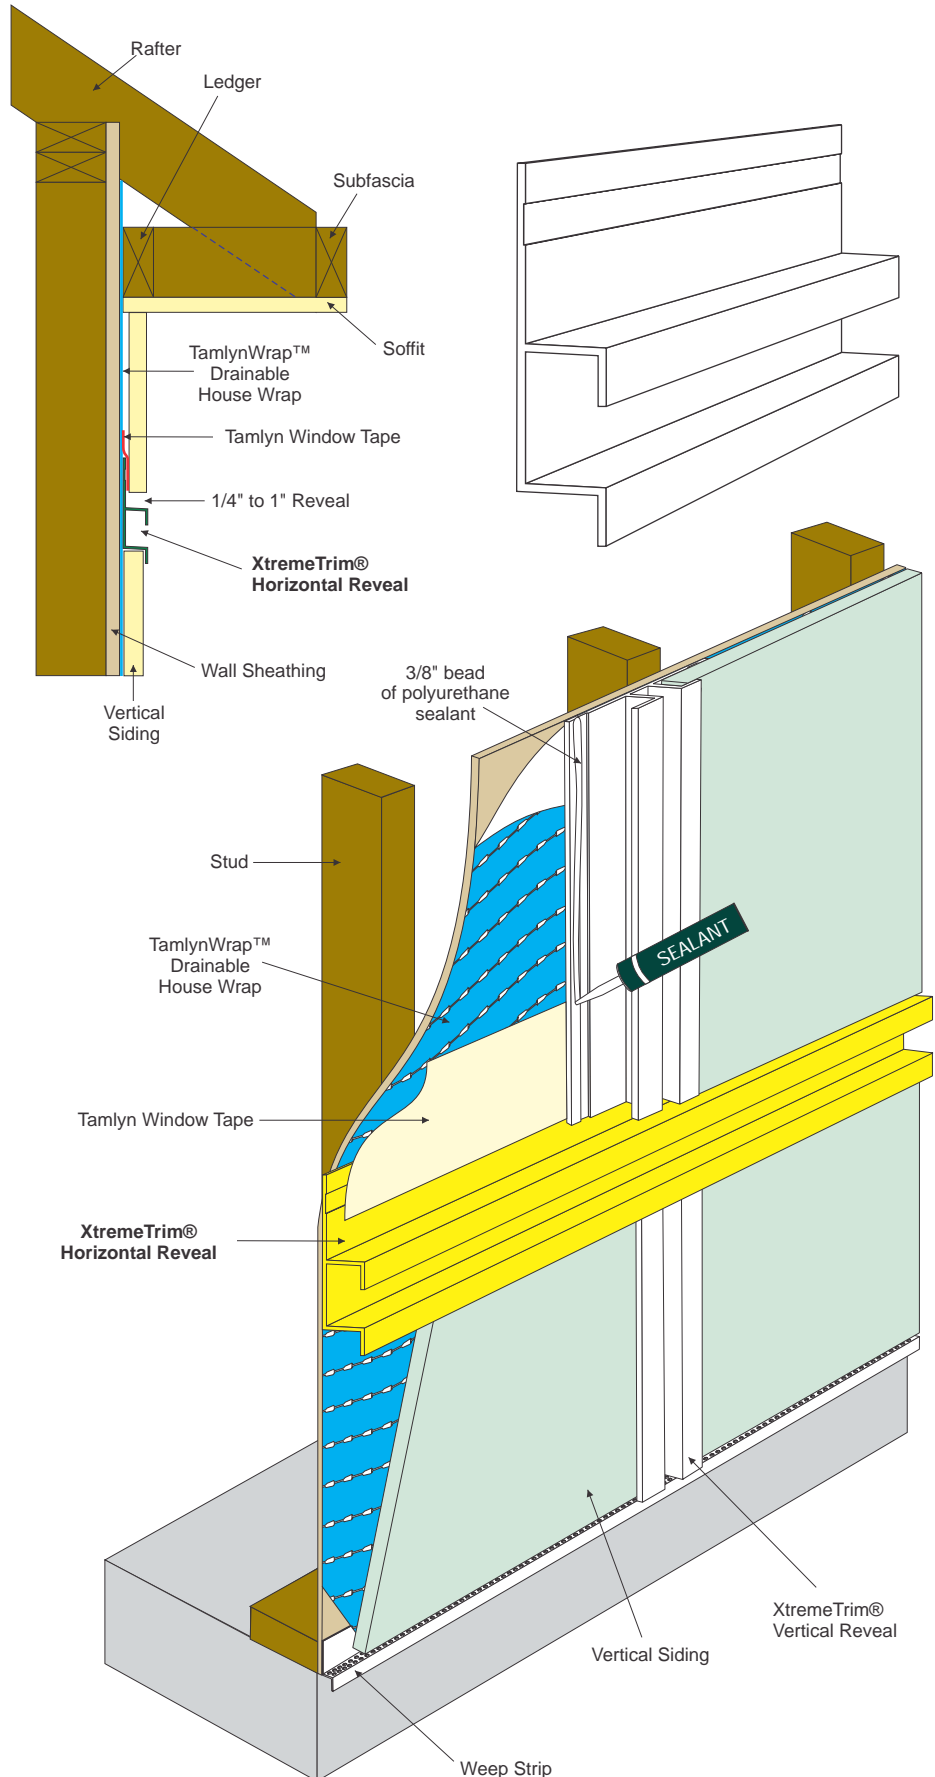

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

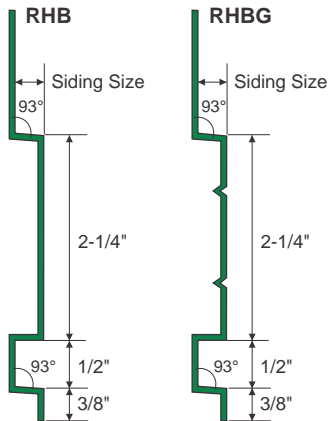

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
RHB516	5/16" (8mm)	10'
RHB716	7/16" (11mm)	10'
RHBG516	5/16" (8mm)	10'
RHBG716	7/16" (11mm)	10'

**DESIGN FEATURE:** Design creates a broad horizontal accent within the plane of the wall without protruding beyond.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturers best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**RECOMMENDED APPLICATION:** Apply waterproofing membrane on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Do not install XtremeTrim® Horizontal Reveal on horizontal applications where the exterior flange can catch water.




Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

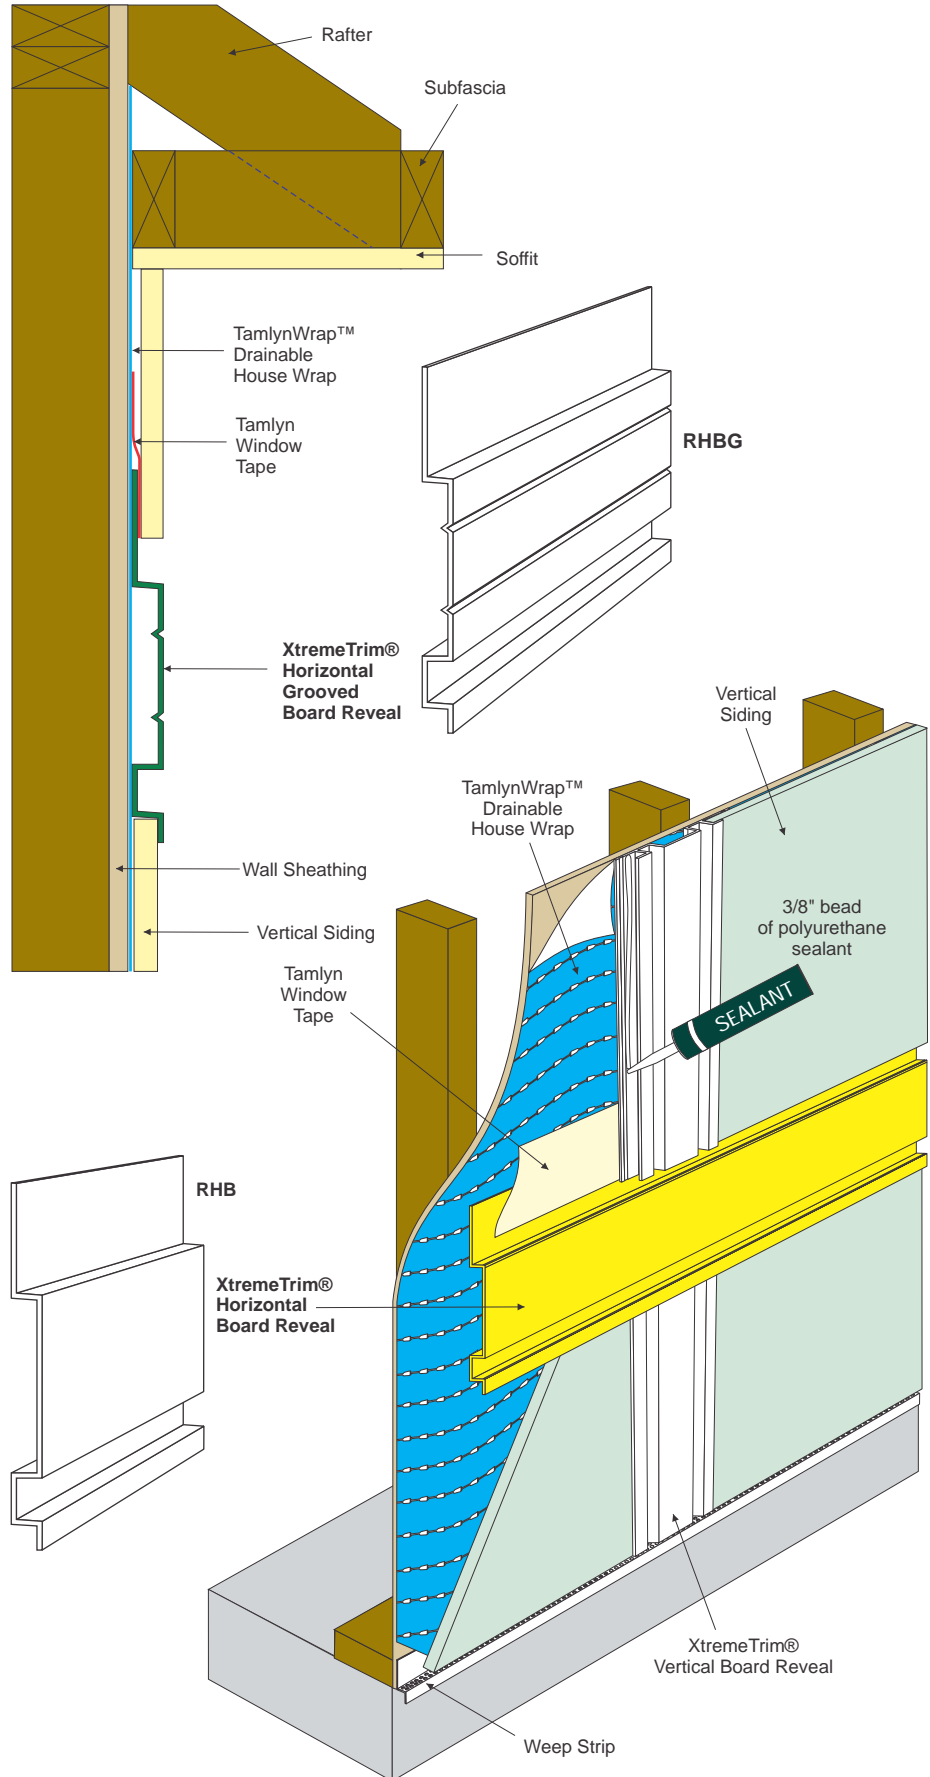

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

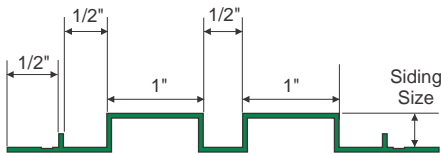

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
RVBN516	5/16" (8mm)	10'

**DESIGN FEATURE:** Unique design duplicates the look of a wood batten without the maintenance headaches while serving as a rustproof flashing between vertical siding.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**FASTENING:** Do not fasten edges of panels until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite panel edges.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.




**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**NOTE:** Use of the XtremeTrim® Vertical Batten Reveal at horizontal joints is not recommended.



Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

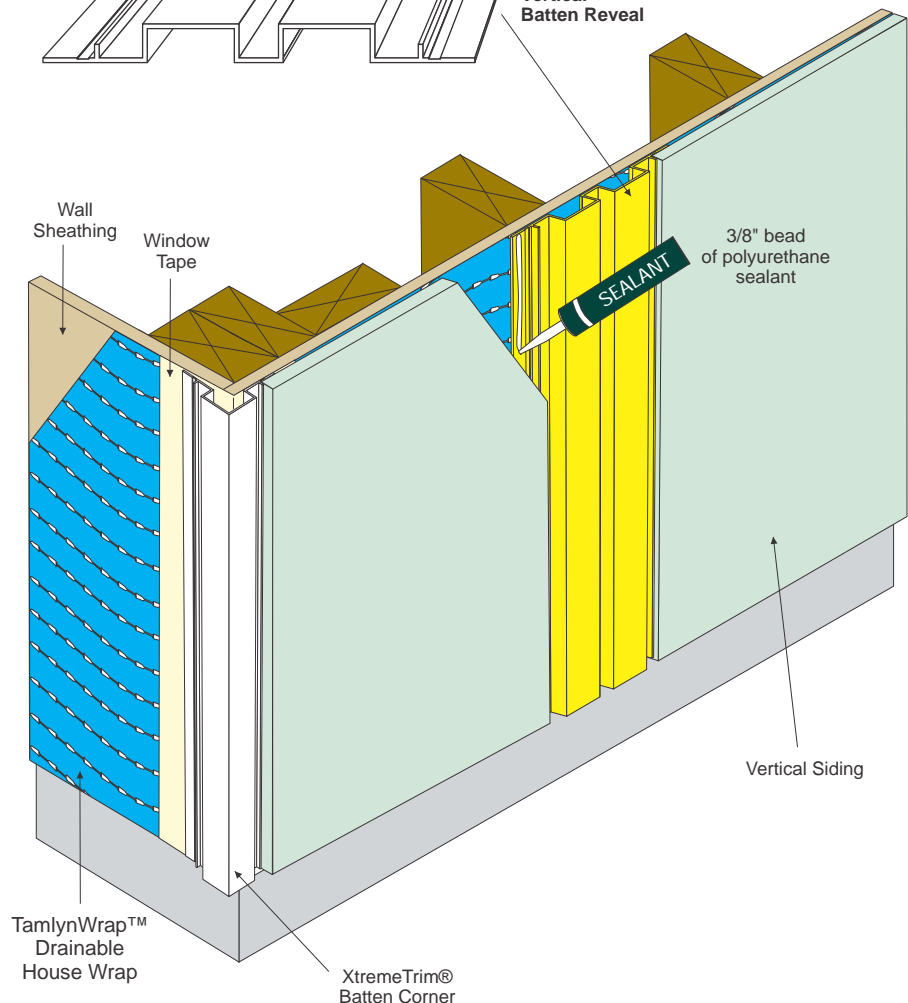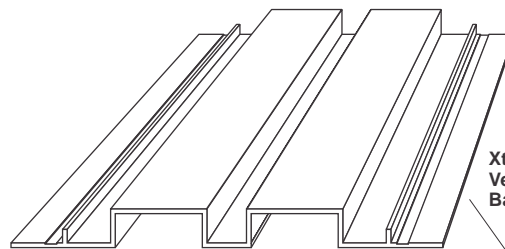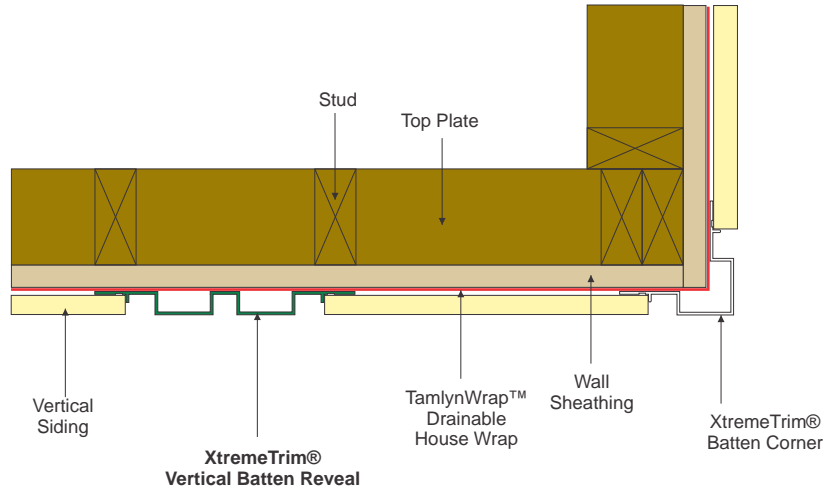


# XtremeTrim® Batten Corner



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

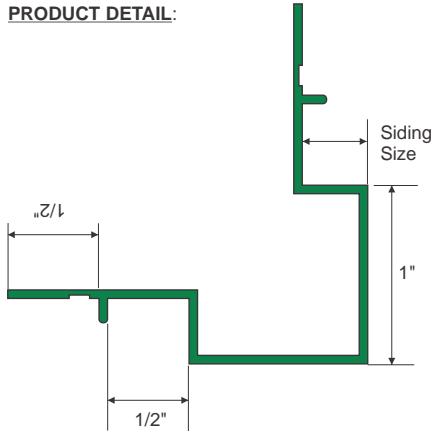

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
XOCBN	5/16" (8mm)	10'

**DESIGN FEATURE:** Offers a bold, unique corner for vertical siding panels. Works best visually with Batten Reveal and Vertical Reveal.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturers best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.



Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing

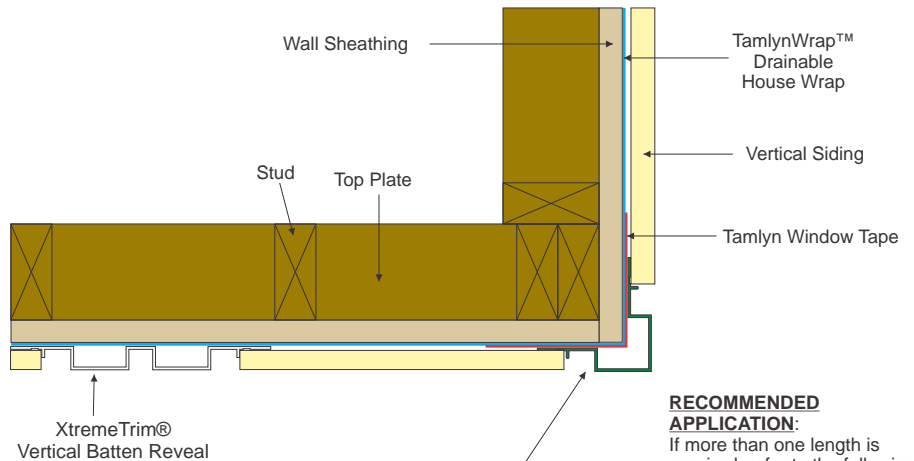


### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.

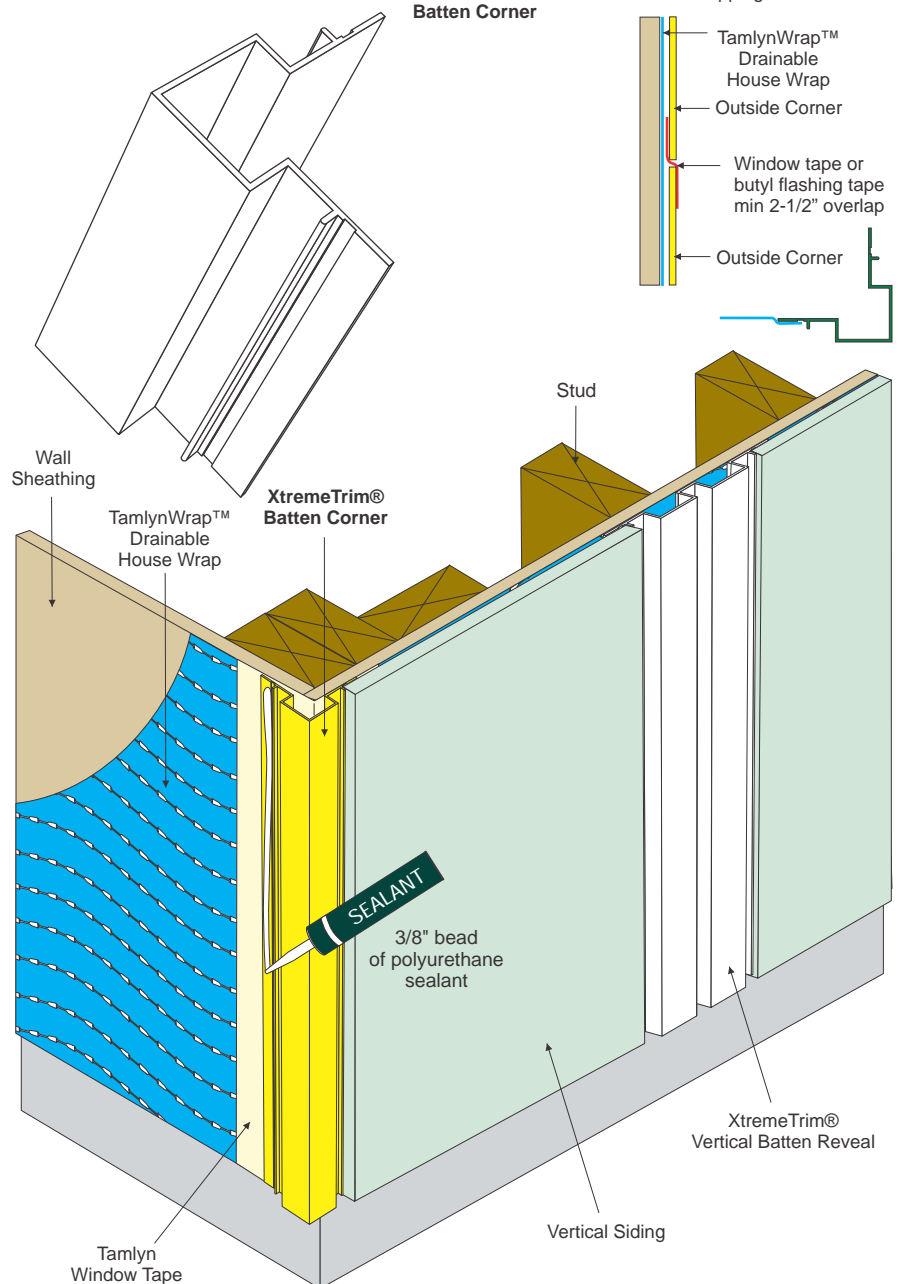

**PRODUCT DETAIL:**



**AVAILABLE SIZES:**

ITEM ID	"A"	"B"	LENGTH
XIC	1-1/2"	7/8"	10'
XICJ	1-1/2"	1-1/2"	10'
XICS	2"	1-1/2"	10'

**DESIGN FEATURE:** Eliminates wood inside corner piece that will split/rot over time.

**MATERIAL:** Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .019" ± .003

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.




**Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.**

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

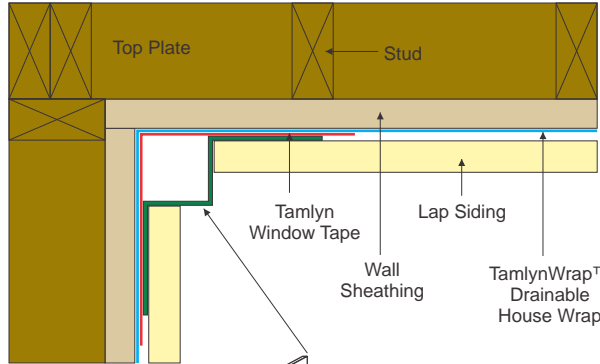

**RECOMMENDED APPLICATION:**

If more than one length is required, refer to the following for overlapping instructions.

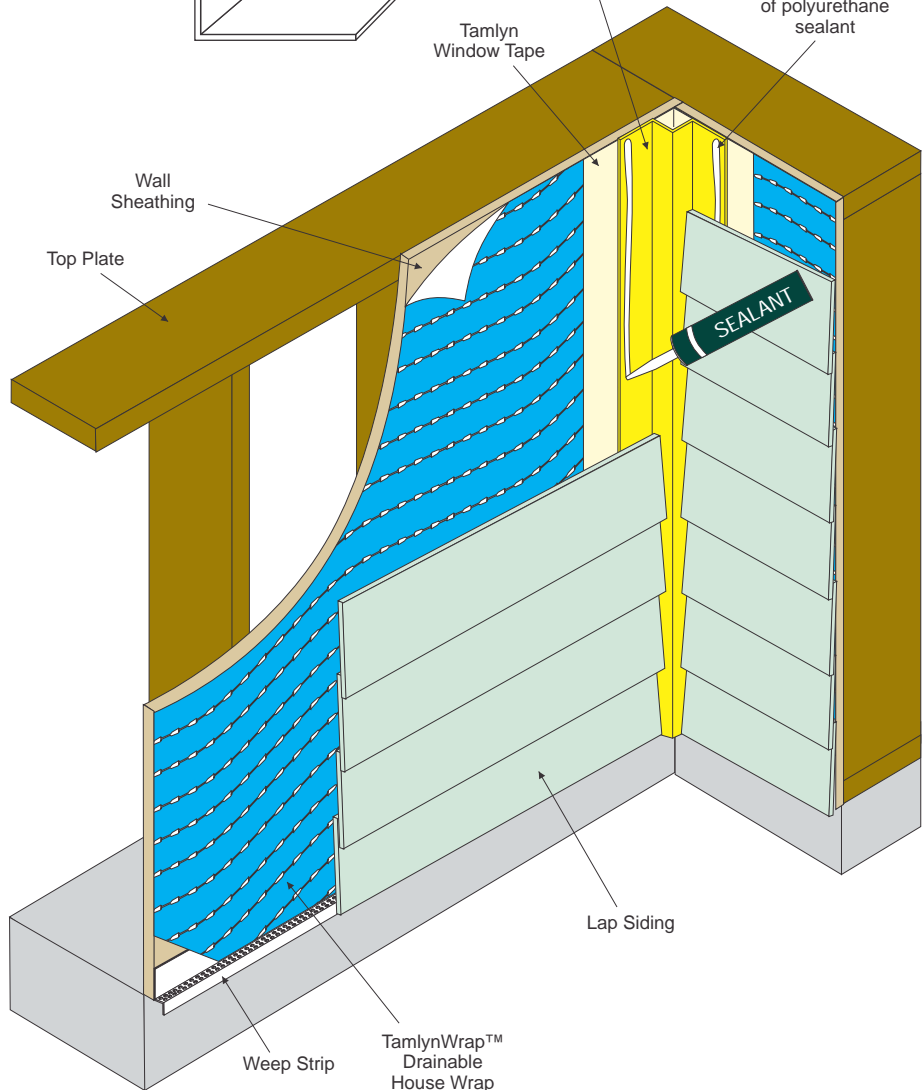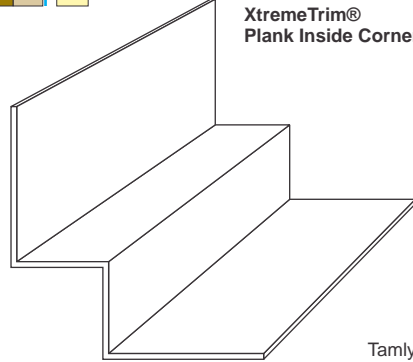


# XtremeTrim® Panel Inside Corner



## EXTRUDED ALUMINUM

US Patent #5,960,598

### PRODUCT DETAIL:



### AVAILABLE SIZES:

ITEM ID	LENGTH
XIC516	10'

**DESIGN FEATURE:** Design duplicates the look of a wood corner piece without the maintenance headaches. For use with 5/16" (8mm) panel products only.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.



Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

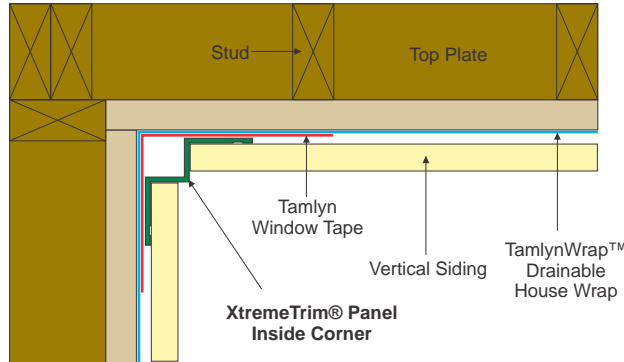

### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.

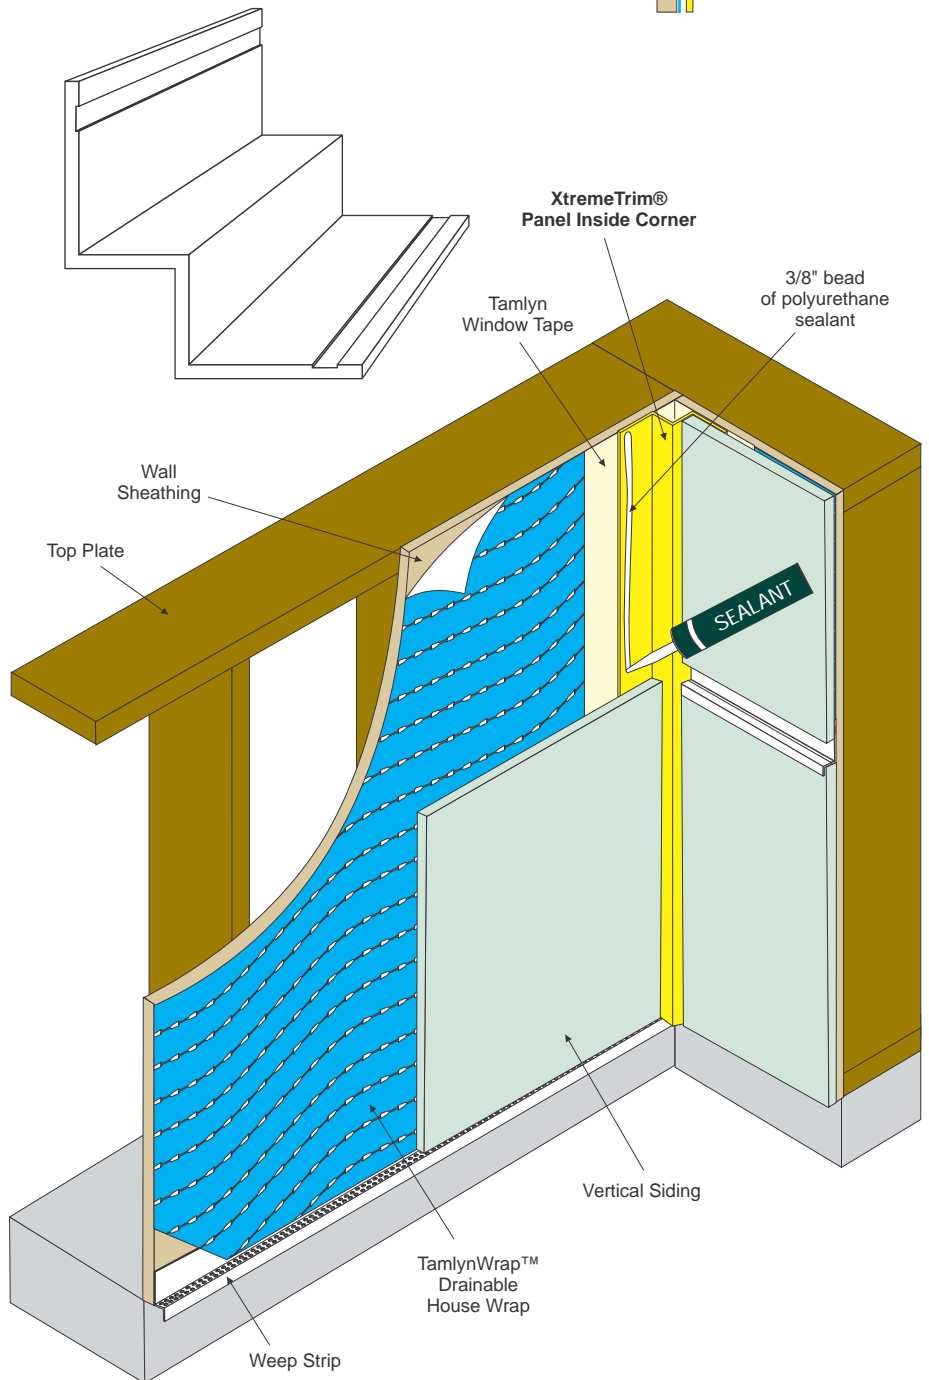


# XtremeTrim® Low Profile Panel Inside Corner



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

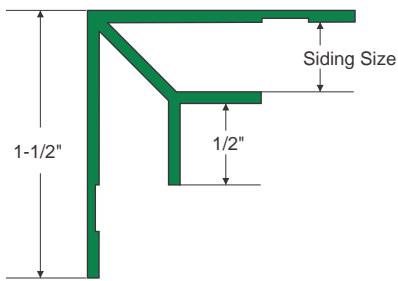

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
XICLP516	5/16" (8mm)	10'

**DESIGN FEATURE:** Minimal face produces a clean, pleasing durable inside corner for vertical siding panels. For use with 5/16" (8mm) panel products only.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS:** Stainless steel fasteners are recommended when installing XtremeTrim®. The nail application is in accordance to the siding manufactures best practice. A nail or two can be attached to hold trim in place while installing siding directly through trim and on to studs.

**FASTENING:** Do not fasten edges of panels until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite panel edges.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.



Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

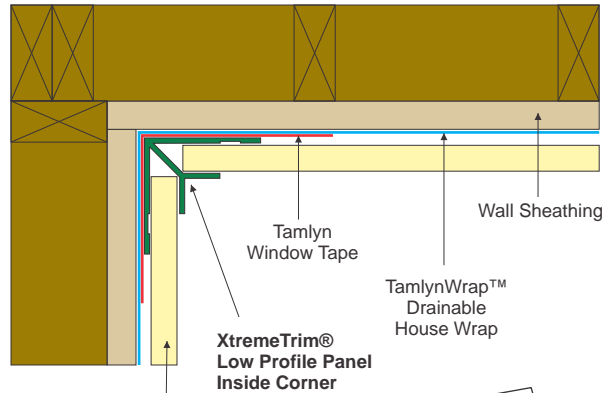

### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.

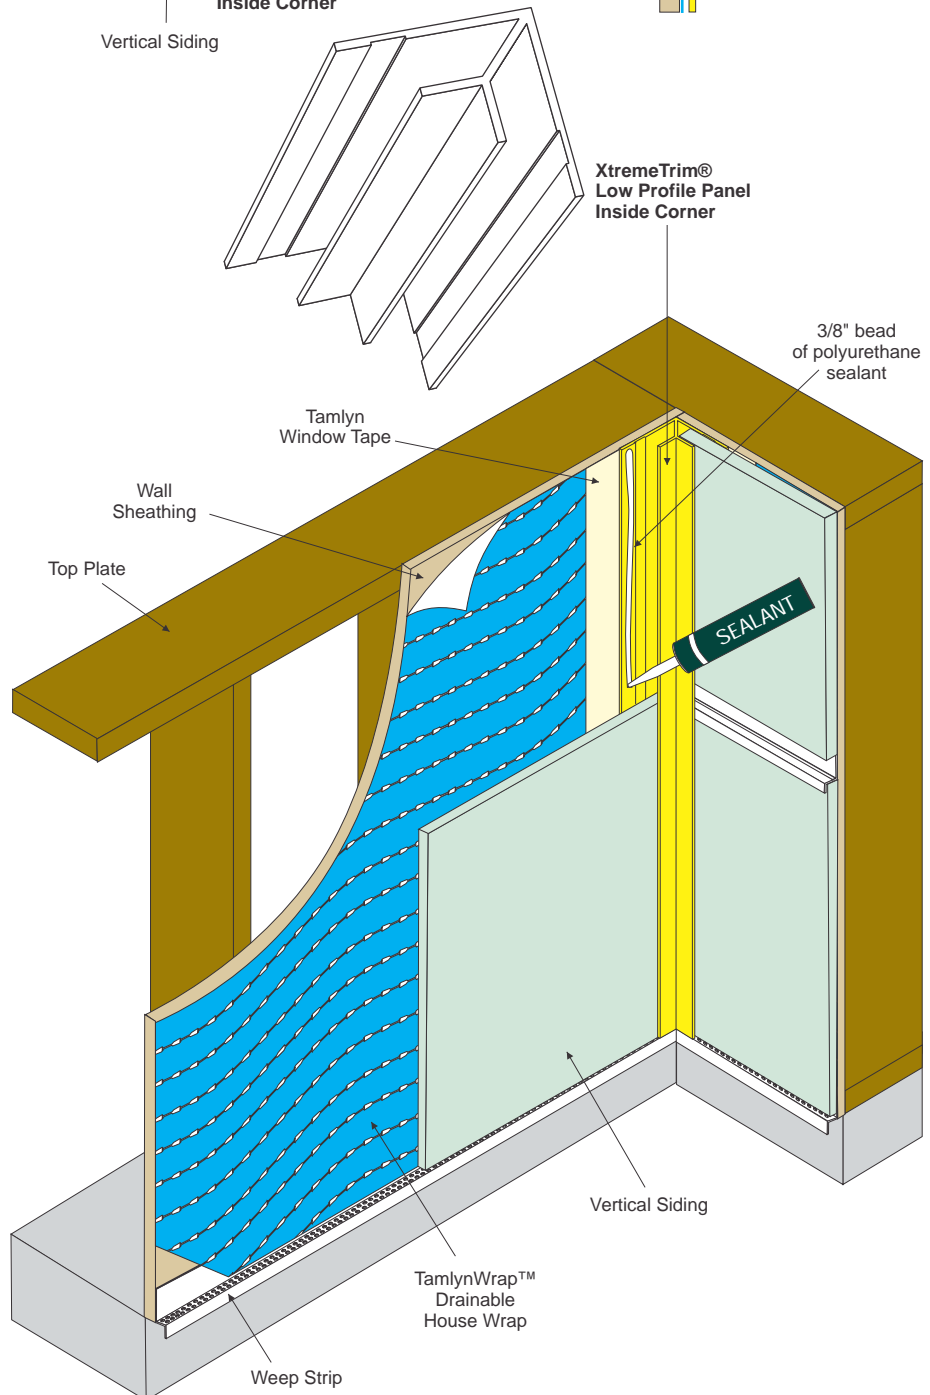


# XtremeTrim® Low Profile Plank Inside Corner



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

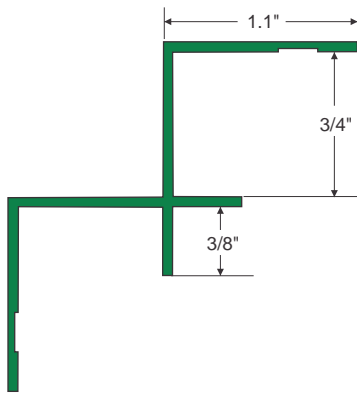

### AVAILABLE SIZES:

ITEM ID	LENGTH
XICLP34	10'

**DESIGN FEATURE:** Minimal face produces a clean, pleasing durable inside corner with plank siding panels.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.



**Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.**

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

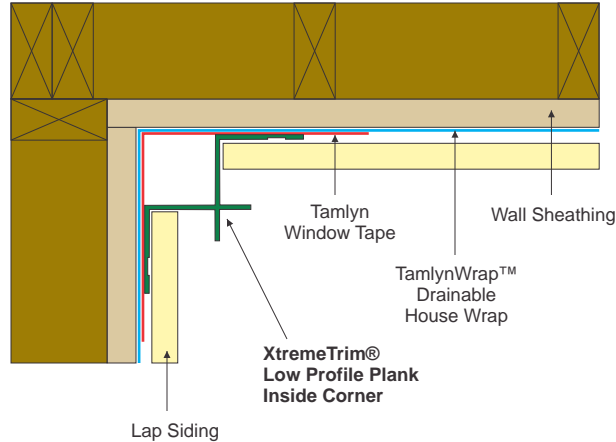


### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.

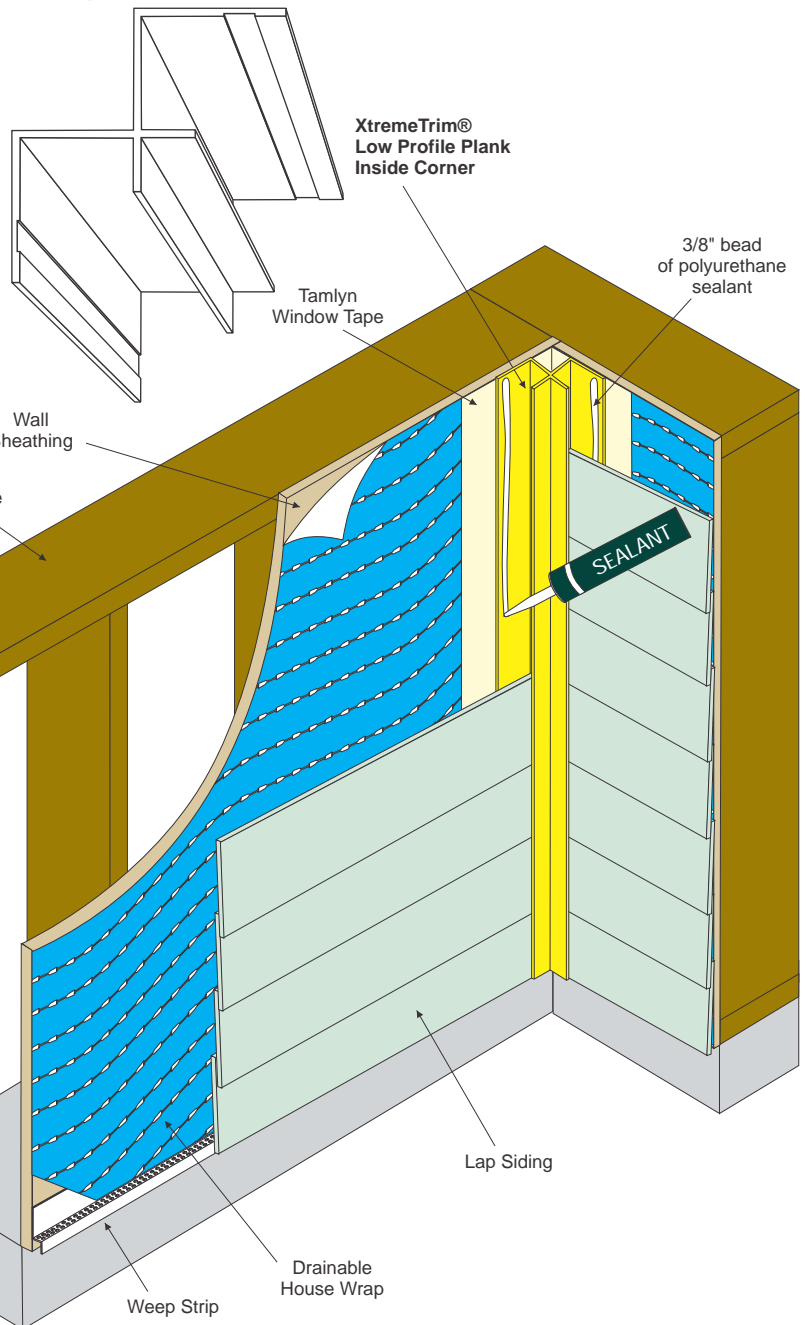

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

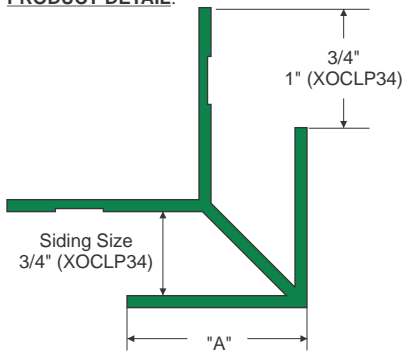

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	"A"
XOCLP516	5/16" (8mm)	3/4"
XOCLP716	7/16" (11mm)	3/4"
XOCLP58	5/8" (16mm)	3/4"
XOCLP34	5/16" Lap Siding	1-1/2"

**DESIGN FEATURE:** Offers a clean outside corner with a minimum visual reveal for vertical siding panels or lap siding.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.


Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

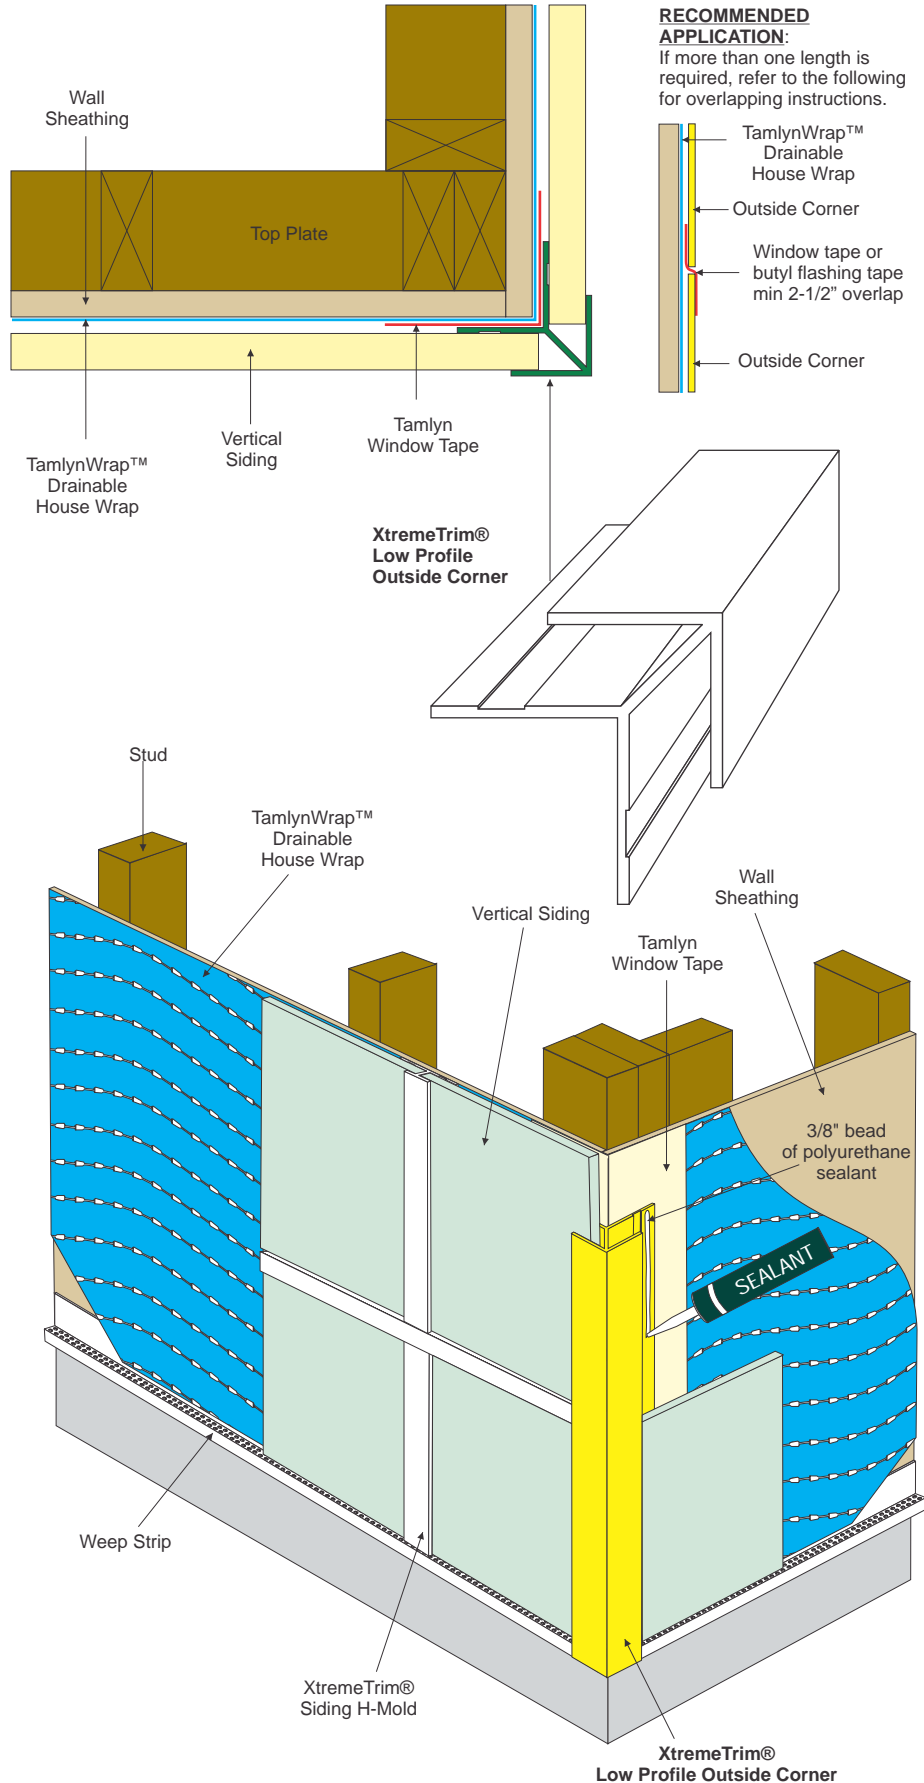

### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.




# XtremeTrim® Reveal Outside Corner



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

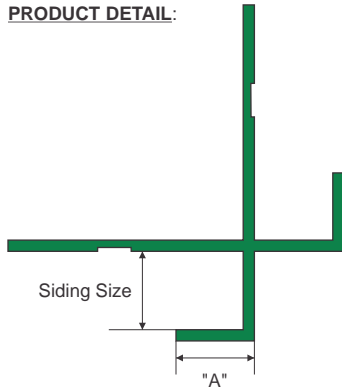

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	"A"
XOCR516	5/16" (8mm)	3/8"
XOCR716	7/16" (11mm)	3/8"
XOCR58	5/8" (16mm)	3/8"
XOCR34	3/4" (19mm)	3/4"

**DESIGN FEATURE:** Provides a clean, open outside corner which compliments the vertical reveal siding system.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.


**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.

Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

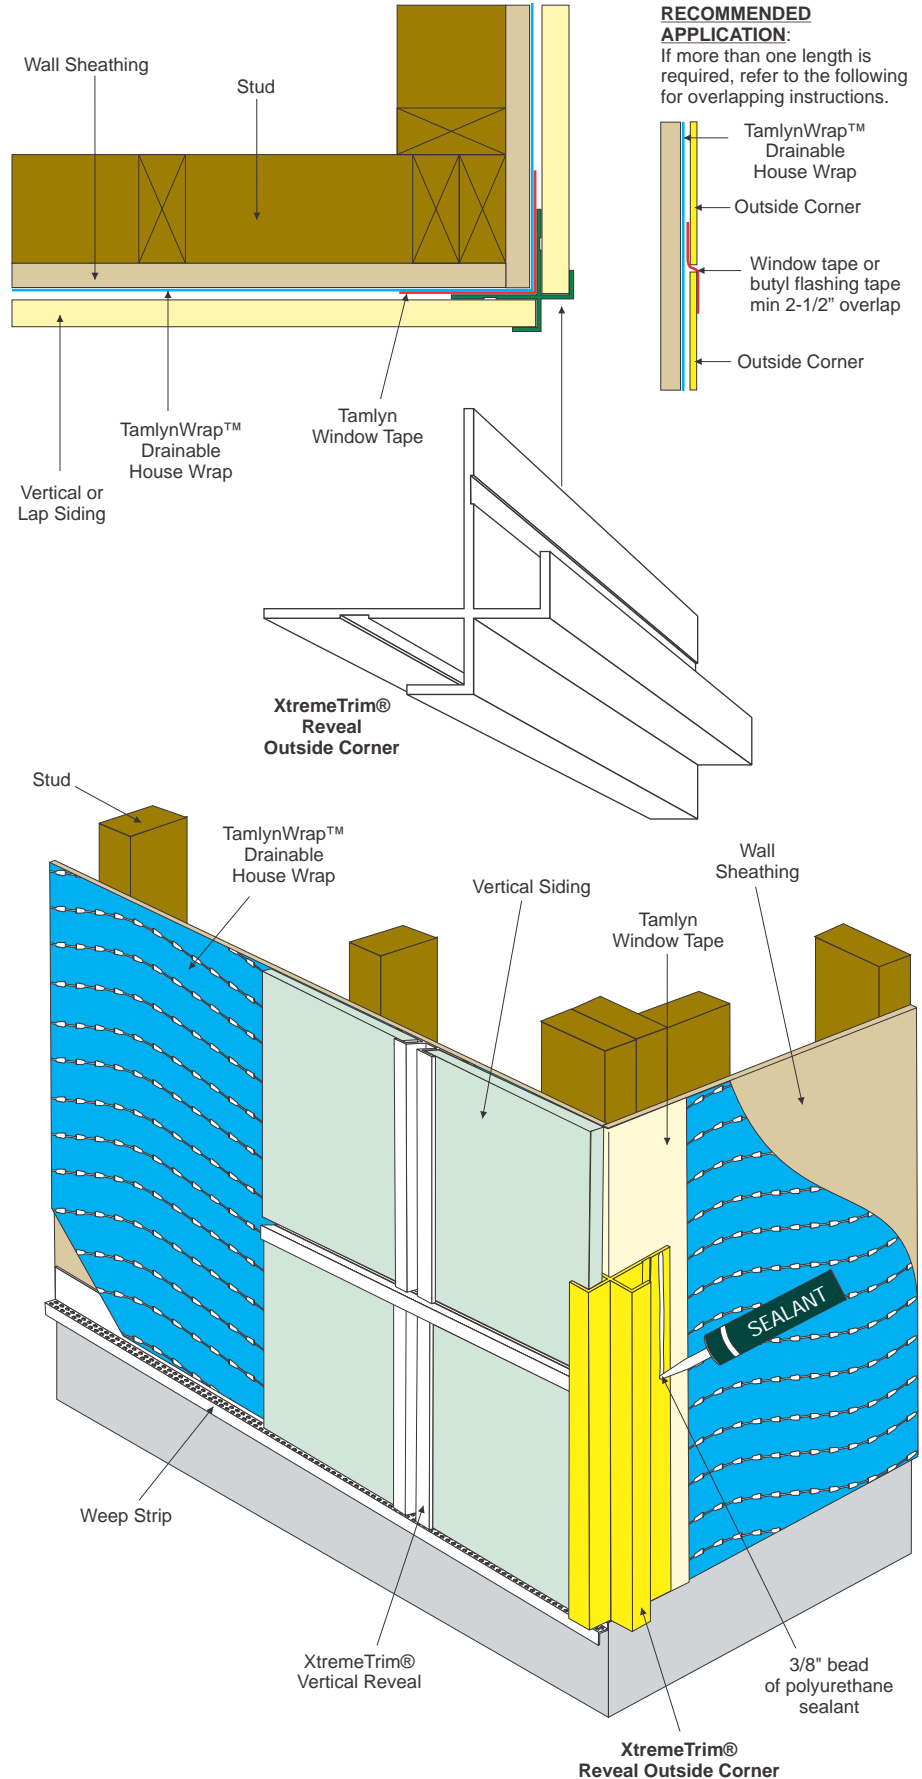


**RECOMMENDED APPLICATION:**  
If more than one length is required, refer to the following for overlapping instructions.



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

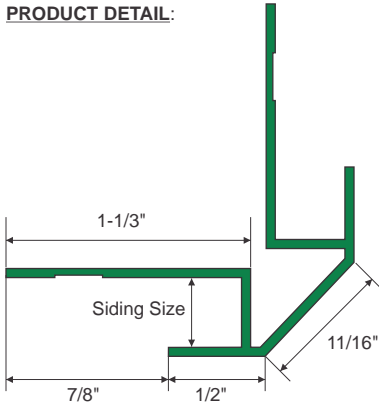

### AVAILABLE SIZES:

ITEM ID	PANEL SIZE	LENGTH
XOCBL	5/16" (8mm)	10'

**DESIGN FEATURE:** Unique design creates an aesthetically attractive blunt corner look, for a strong durable outside corner with vertical siding panels.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.


Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

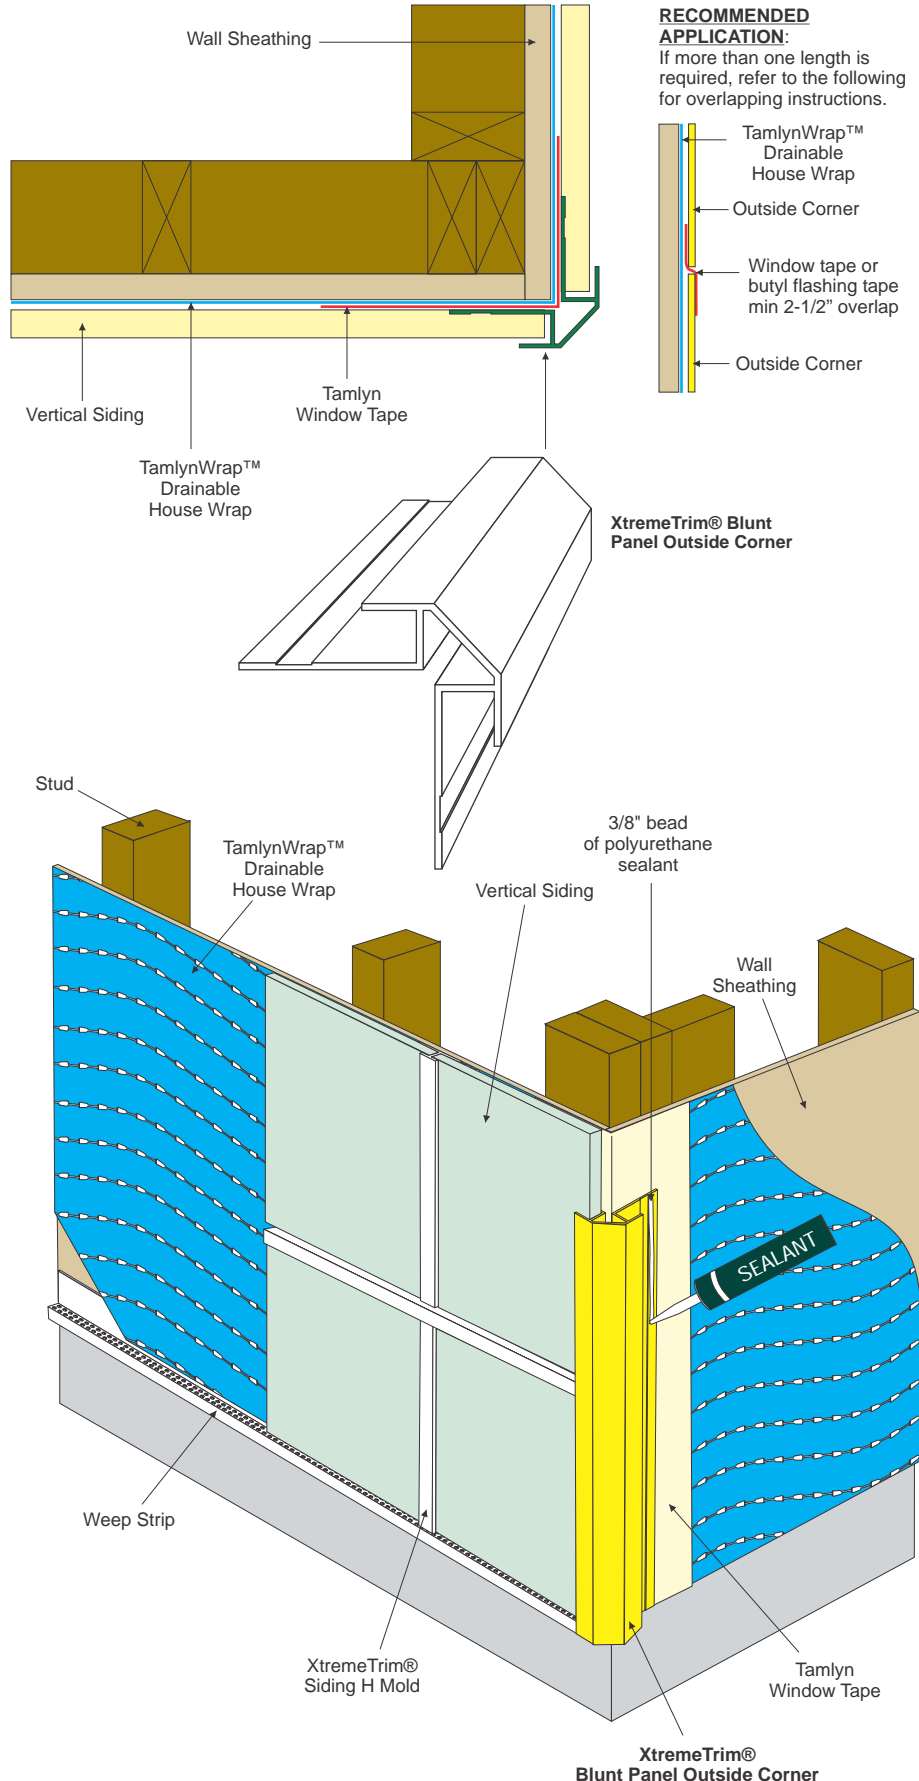

### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.




# XtremeTrim® Butted Outside Corner



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

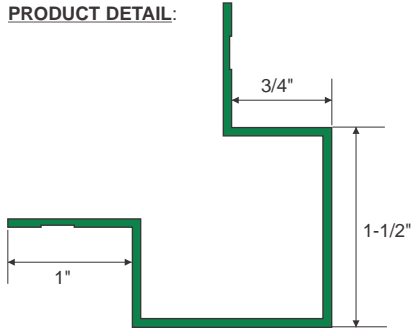

### AVAILABLE SIZES:

ITEM ID	LENGTH
XOCBT	10'

**DESIGN FEATURE:** A solid appearance and a versatile corner application with panel or plank or at transitions.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.


Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

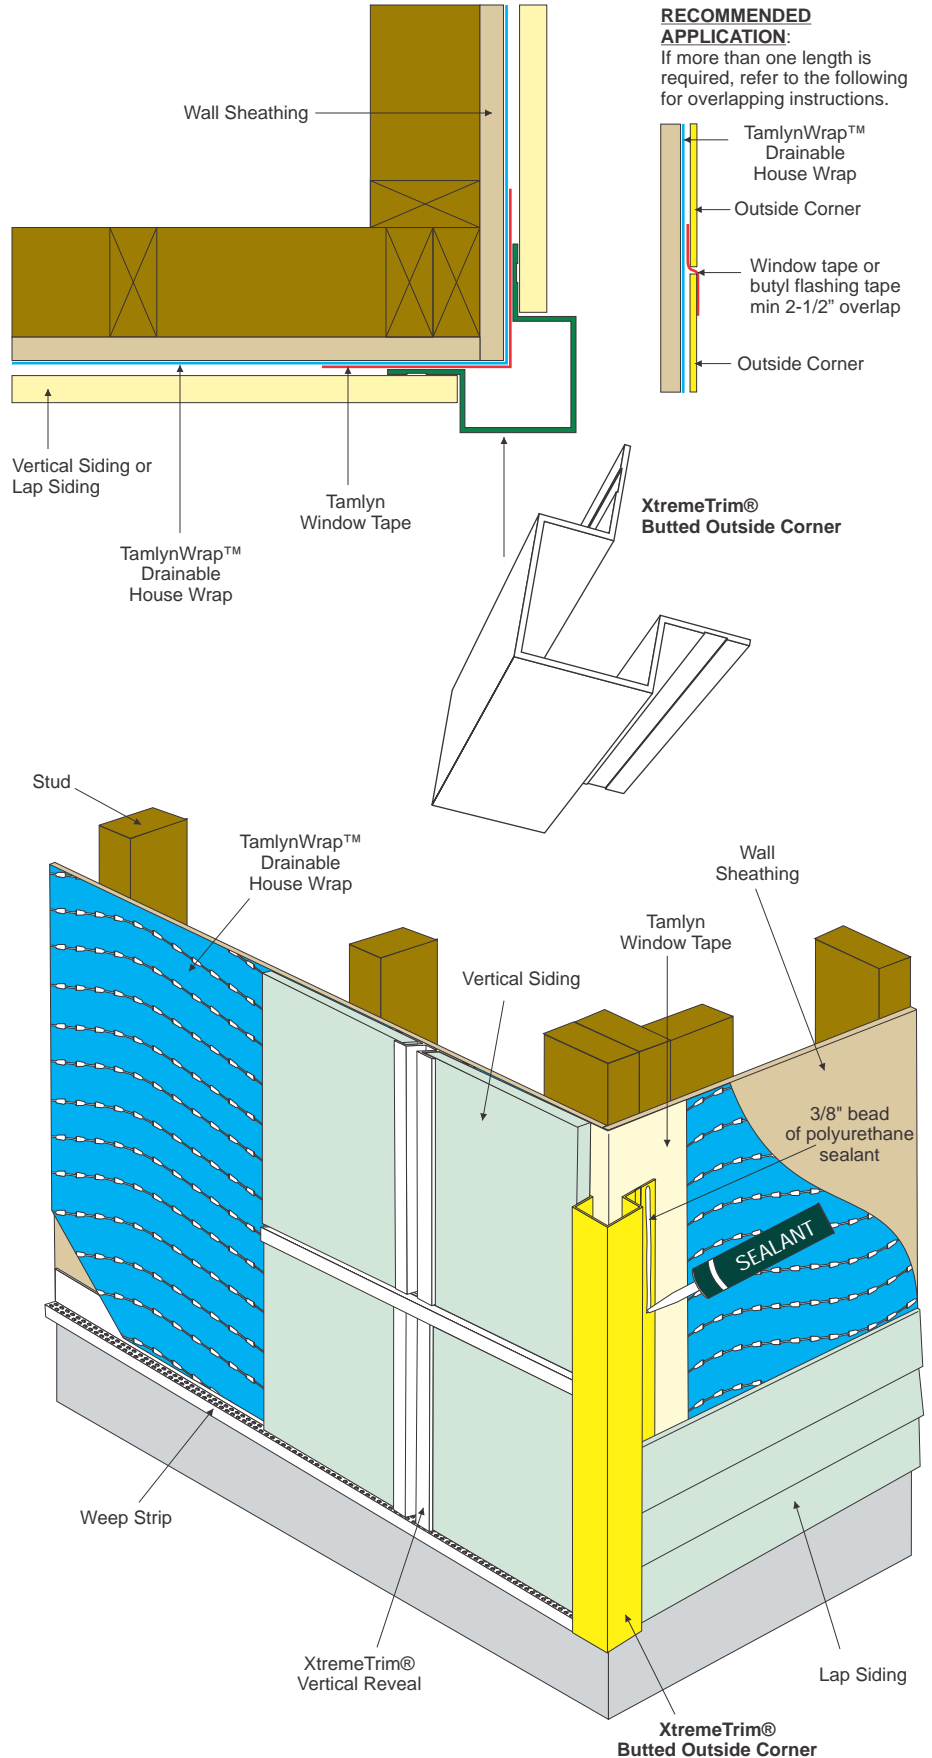


### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

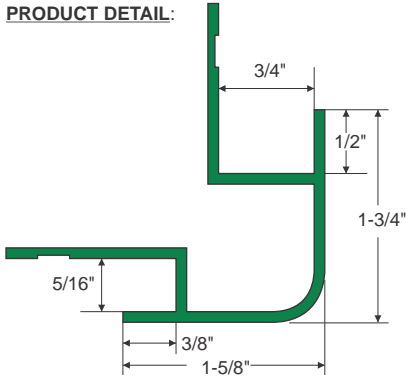

### AVAILABLE SIZES:

ITEM ID	LENGTH
XOCB51634	10'

**DESIGN FEATURE:** Provides a smooth, rounded transition from vertical siding panels to lap siding.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.



**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.

Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

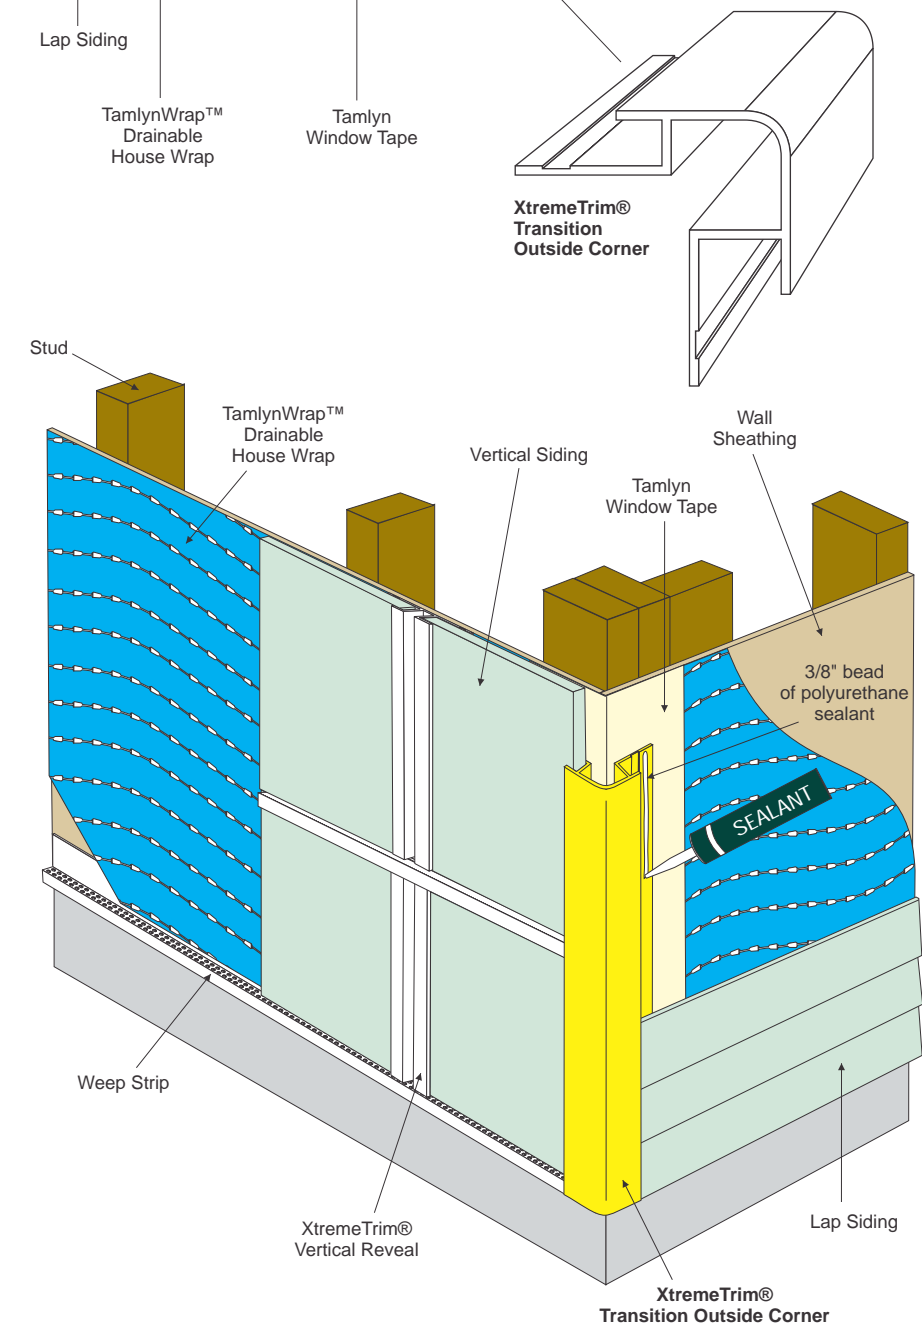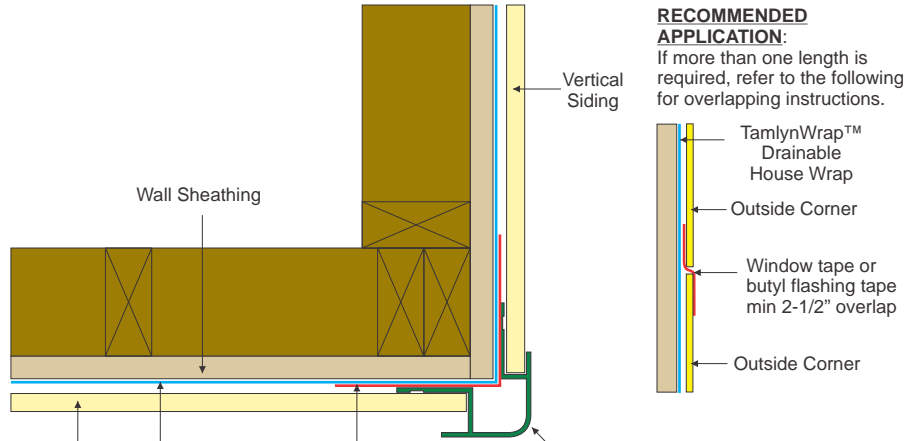


# XtremeTrim® Bullnose Inside Corner



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

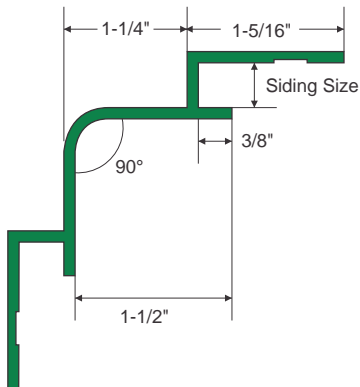

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
XICB516	5/16" (8mm)	10'
XICB34	3/4" (19mm)	10'

**DESIGN FEATURE:** Provides a smooth, rounded inside corner for vertical siding panels and lap siding.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.



Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

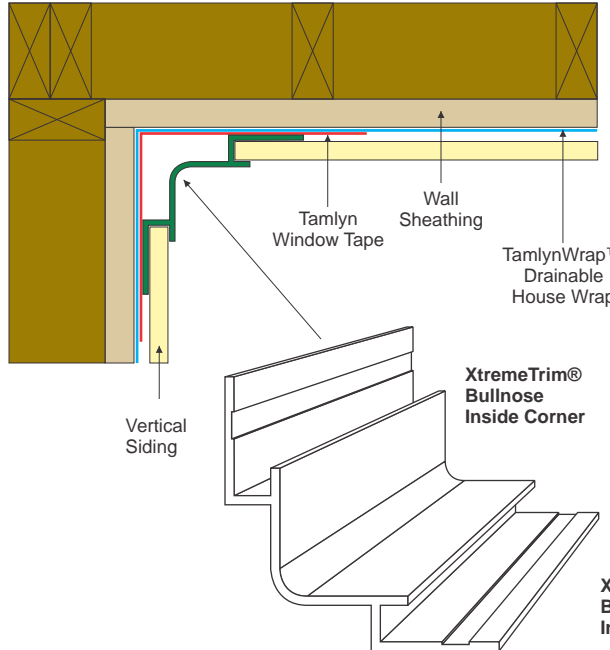


### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.

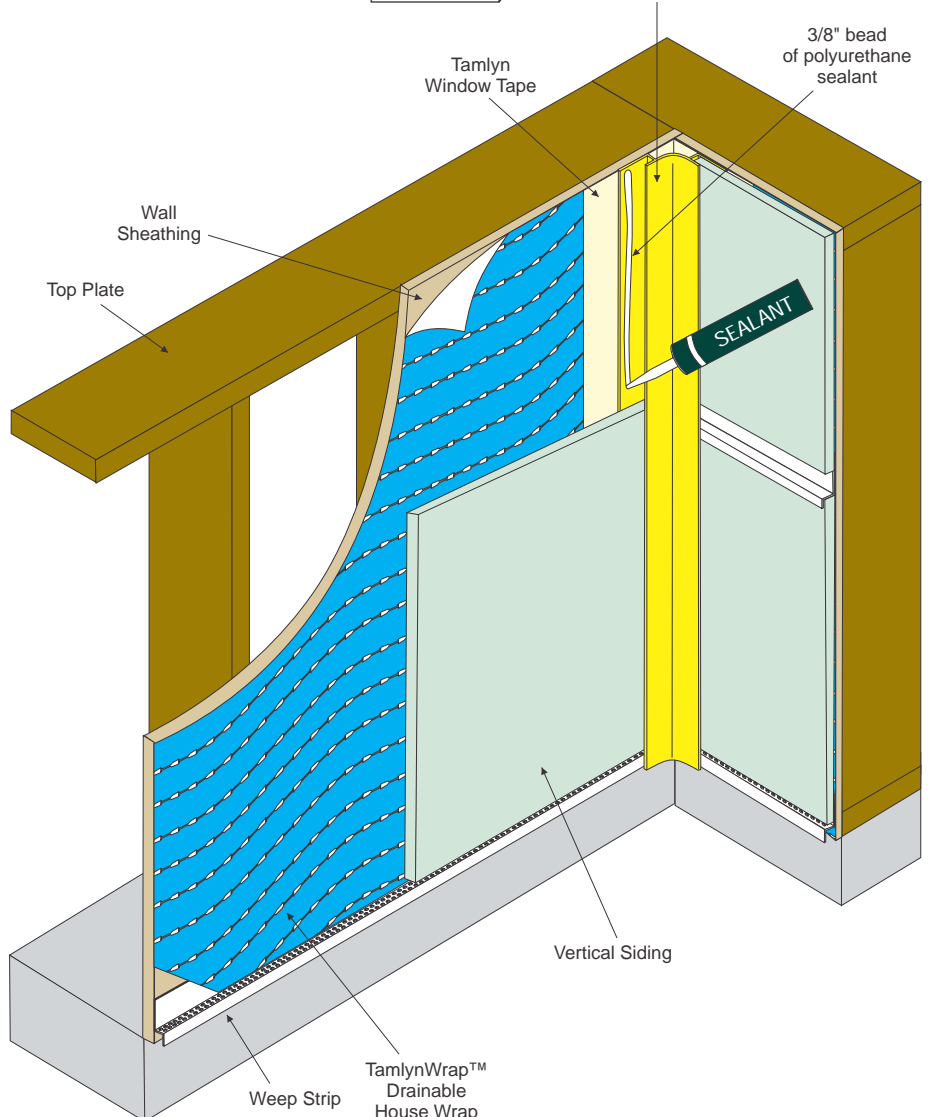

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

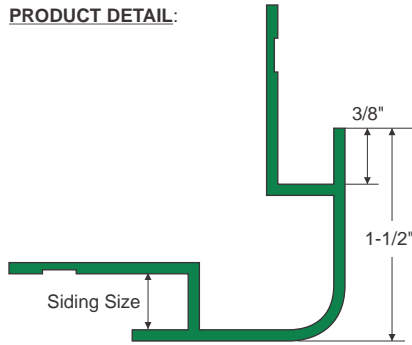

### AVAILABLE SIZES:

ITEM ID	SIDING SIZE	LENGTH
XOCB516	5/16" (8mm)	10'
XOCB34	3/4" (19mm)	10'

**DESIGN FEATURE:** Provides a smooth, rounded outside corner for vertical siding panels and lap siding.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.


Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

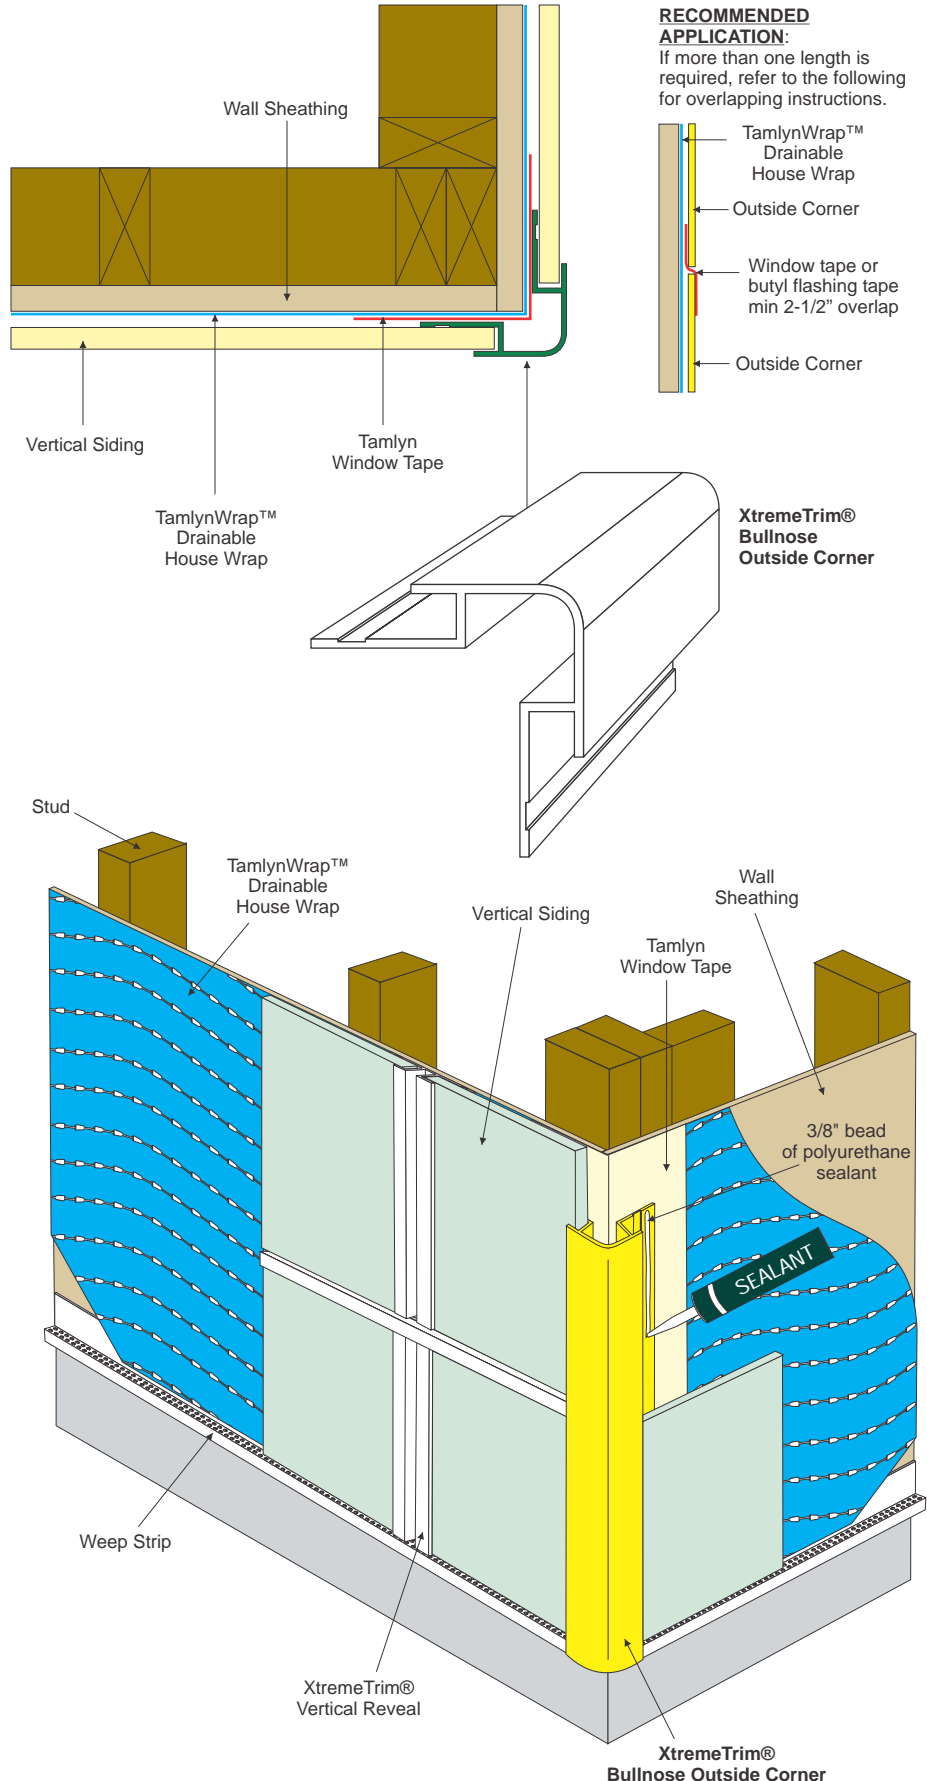

### RECOMMENDED APPLICATION:

If more than one length is required, refer to the following for overlapping instructions.




# XtremeTrim® 3-1/2" Outside Corner



## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

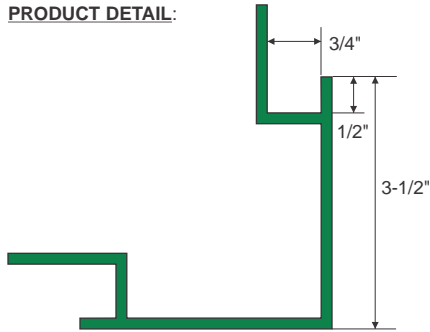

### AVAILABLE SIZES:

ITEM ID	LENGTH
XOC35	10'

**DESIGN FEATURE:** A traditional outside corner without the joints, caulked seams and nail holes that butted 1x4s require.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.


**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply a continuous 3/8" bead of polyurethane sealant on trim before setting panels to help minimize water intrusion behind the siding.

**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.


Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

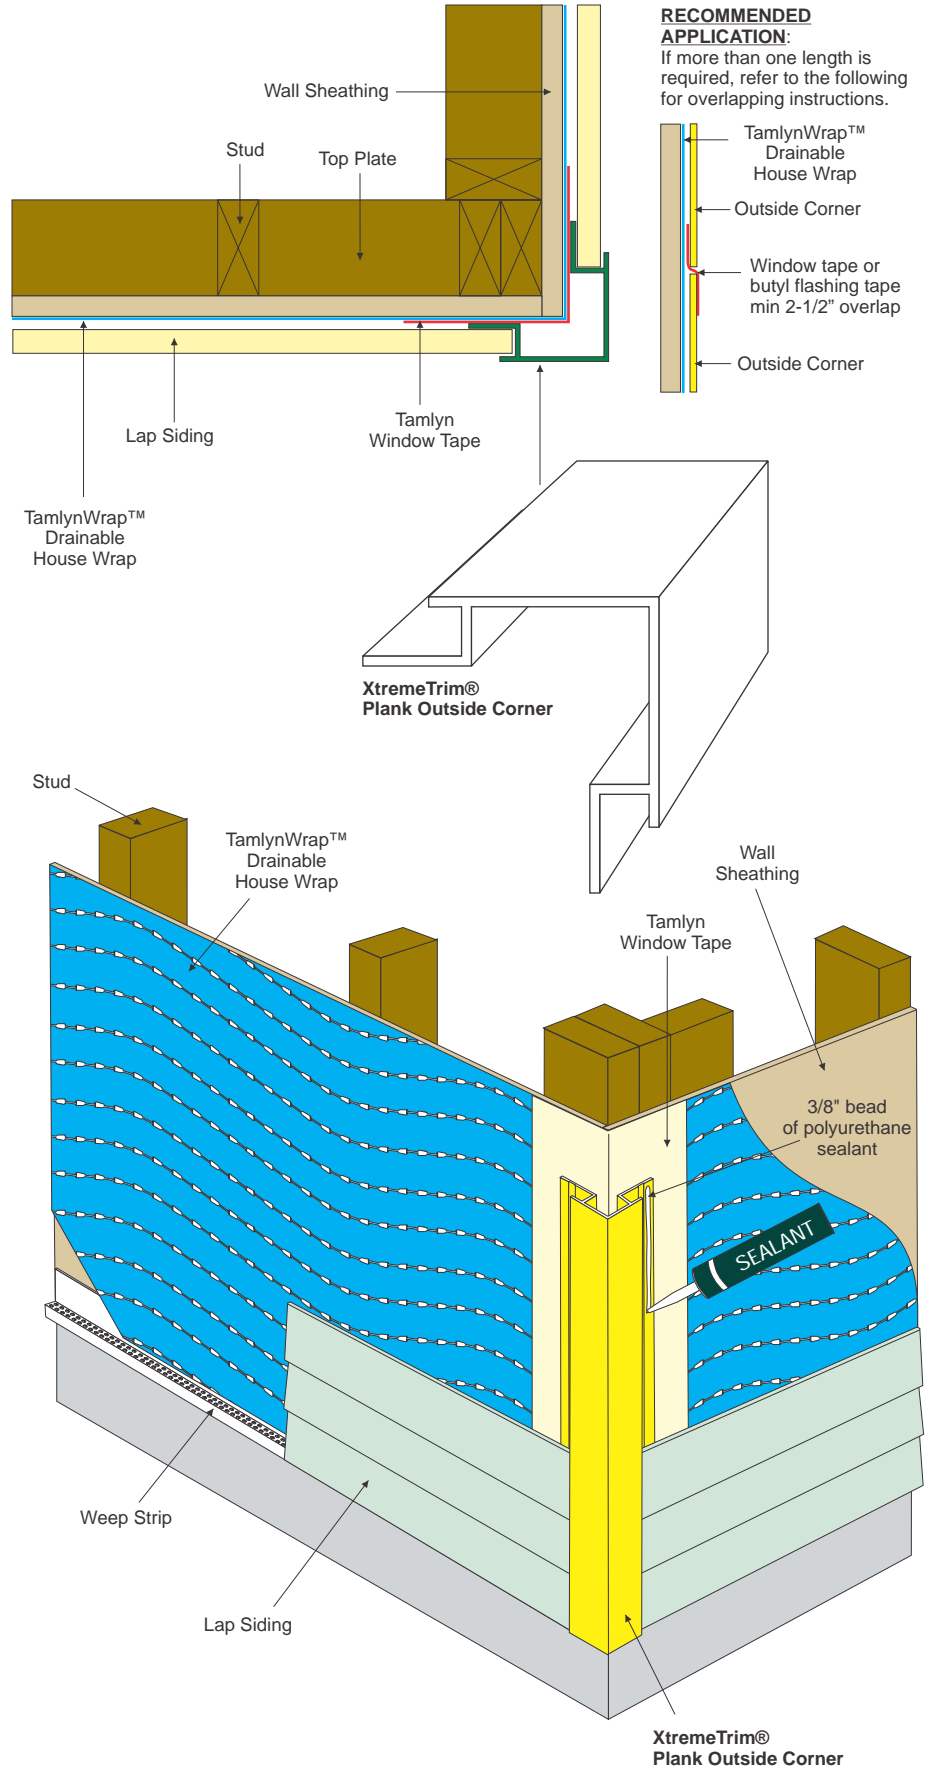

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

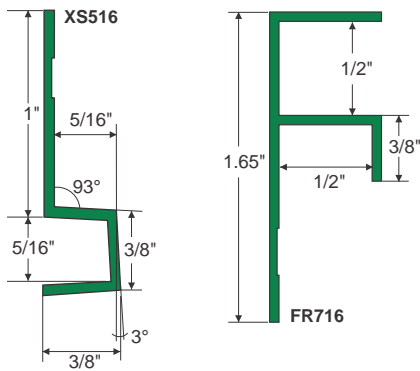

### AVAILABLE SIZES:

ITEM ID	LENGTH
XS516	8'
FR716	8'

**DESIGN FEATURE:** Design for facade / soffit transition with an appearance complementary to the vertical reveal.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.


**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


**Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.**

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

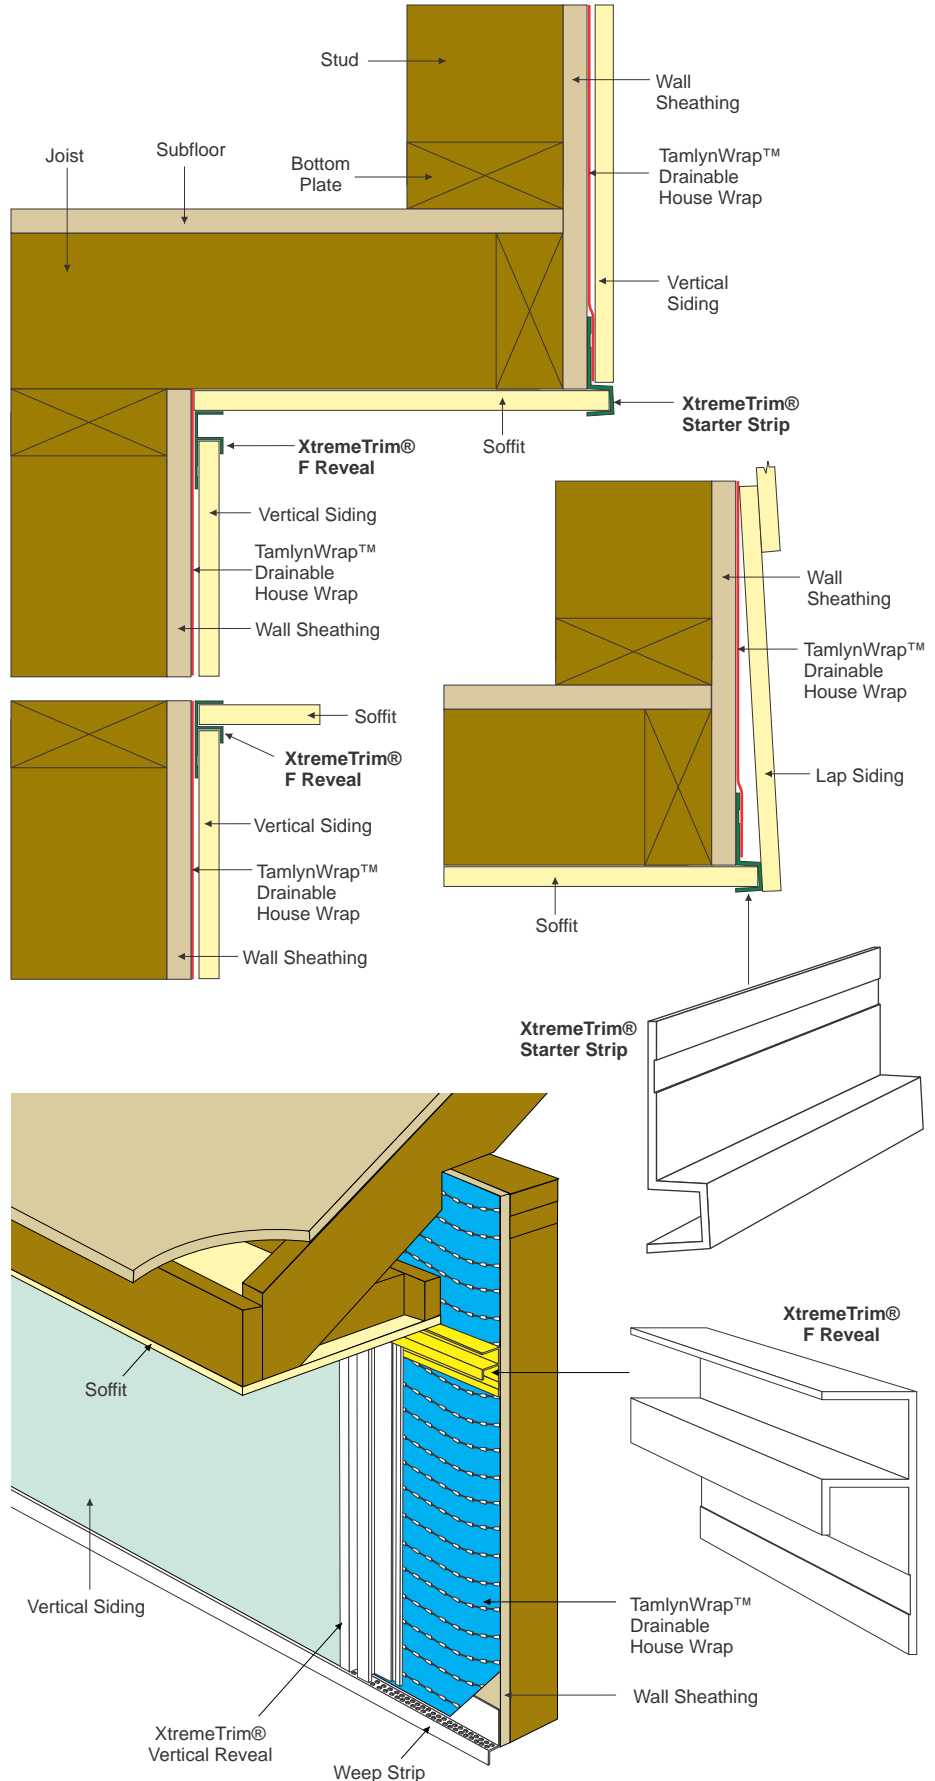

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

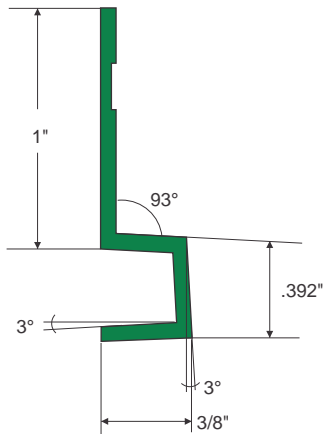

### AVAILABLE SIZES:

ITEM ID	LENGTH
XS516	8'

**DESIGN FEATURE:** Starter/bottom course for both vertical and lap siding. Provides ease-of-installation with correct angle.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.



**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.


Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

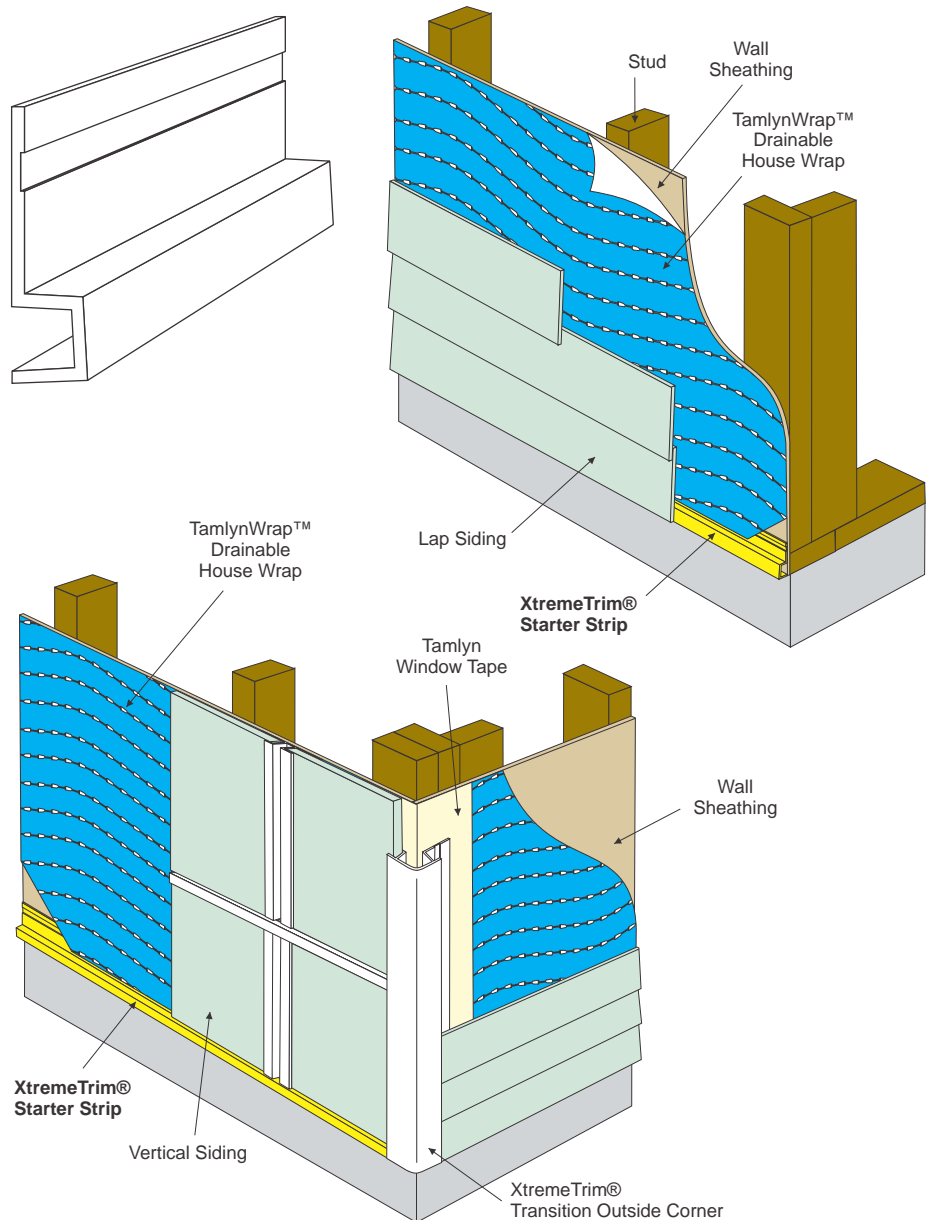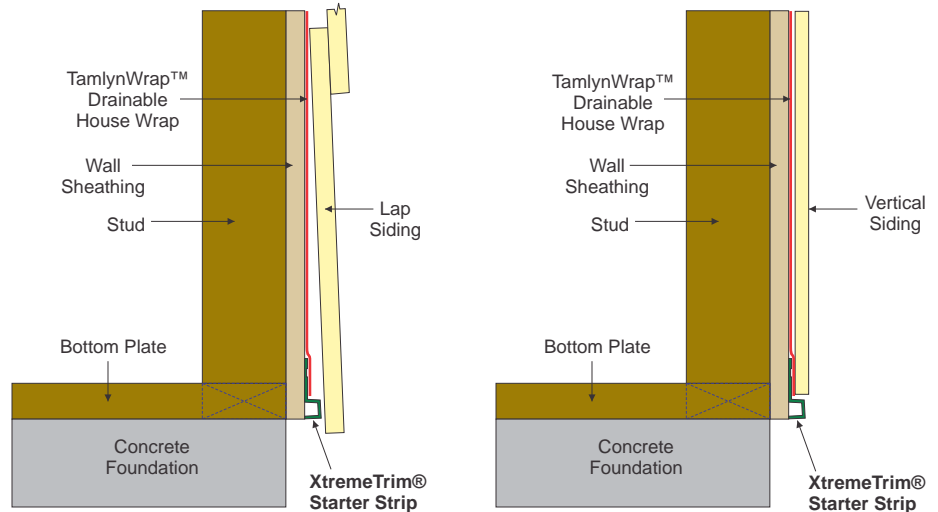

## EXTRUDED ALUMINUM

### PRODUCT DETAIL:

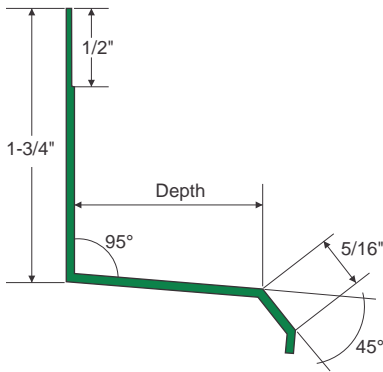

### AVAILABLE SIZES:

ITEM ID	DEPTH	LENGTH
XWF1148	1-1/4" (31.75mm)	8'
XWF1128	1-1/2" (38.10mm)	8'
XWF158	1-5/8" (41.27mm)	8'

**DESIGN FEATURE:** Provides an easy to install and long-lasting method of minimizing water penetration. Used over window trim, band boards, panel intersections, and other vertical surfaces.

**MATERIAL:** 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**THICKNESS:** .050" (1.27mm) ± .005

**FINISH:** Available in standard primed (ready-to-paint), standard color match (available in most popular siding and soffit colors), Coastal Color Coating™, and anodized finishes. Unless otherwise specified all XtremeTrim® products are provided in primed.

**FASTENERS AND FASTENING:** Stainless steel fasteners are recommended when installing XtremeTrim® and fiber cement products. Panel/Plank nail application shall be in accordance with the siding manufacturer's best practice. XtremeTrim® profiles may be secured in place with a few SS nails until fastened through panels and in to studs during panel fastening. Do not fasten edges of panels or planks until trims are in place. Fasten panel at center and work outward. Fasteners should be staggered on opposite edges of panels.

**CUTTING:** Use a non ferrous carbide miter saw blade when cutting XtremeTrim®.

**PAINTING:** Use Direct to Metal (DTM) paint with XtremeTrim®. See XtremeTrim® Painting Guide.

**BUTT JOINTS:** Polyurethane sealant is required between butt joints where two trims come together. May also be further protected by use of a piece of TAMLYN SecureSeal Tape behind the butt joint or with a metal flasher behind the joint.

**RECOMMENDED APPLICATION:** Apply waterproofing membrane on trim before setting panels to help minimize water intrusion behind the siding.



**BEST PRACTICE FOR INSTALLING CORNERS**  
Install house wrap - continuous from bottom to top, overlapping as per manufacturer's install method. Install 12" self adhesive membrane tape vertically at both inside and outside corners for additional protection against break down.

**NOTES:** Do not install XtremeTrim® Window Flashing on horizontal applications where the exterior flange can catch water.




**Please follow siding manufacturer's best practice application when installing any Tamlyn accessory. XtremeTrim® profiles do not form a moisture management system, the architect and builder are responsible for designing and installing a code compliant building envelope.**

**WARNING:** Before installing Tamlyn XtremeTrim® you must use either a drainable house wrap or a standard house wrap with rainscreen thus allowing moisture to weep between the siding and the house wrap. See drawings on page 5 for both the drainable housewrap and rainscreen methods.

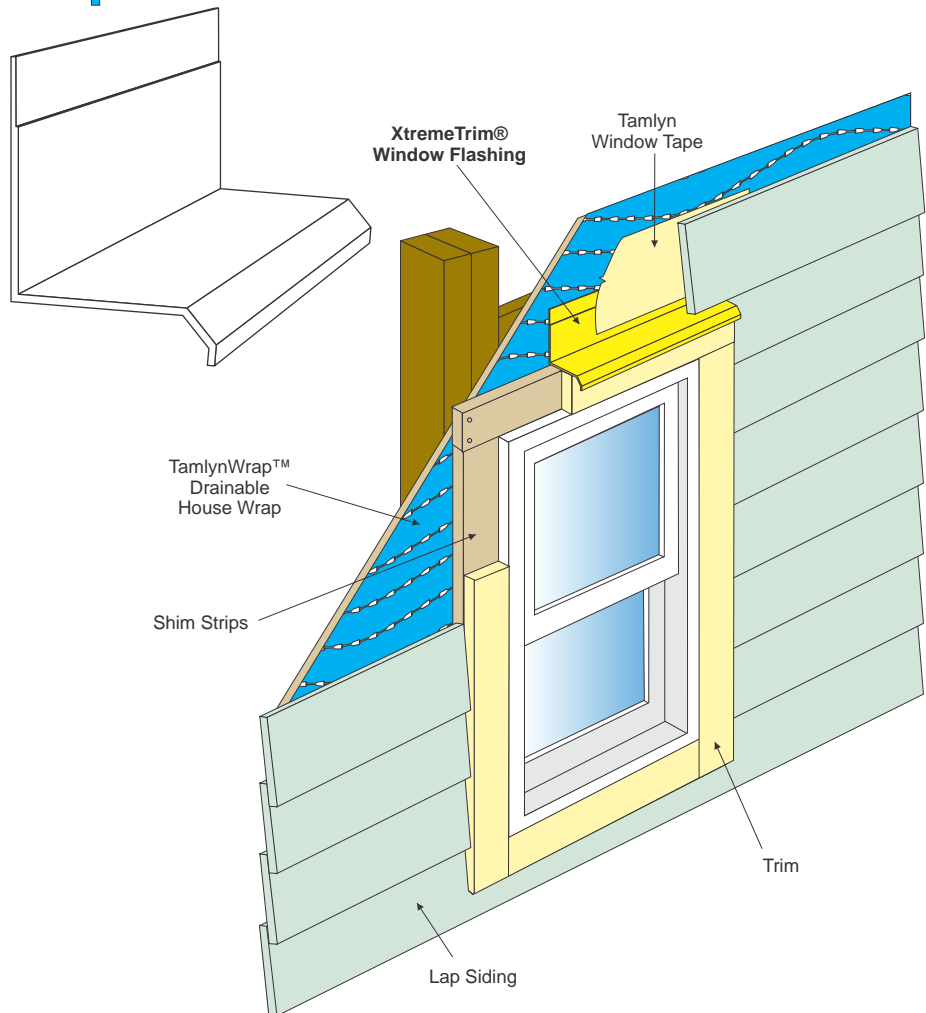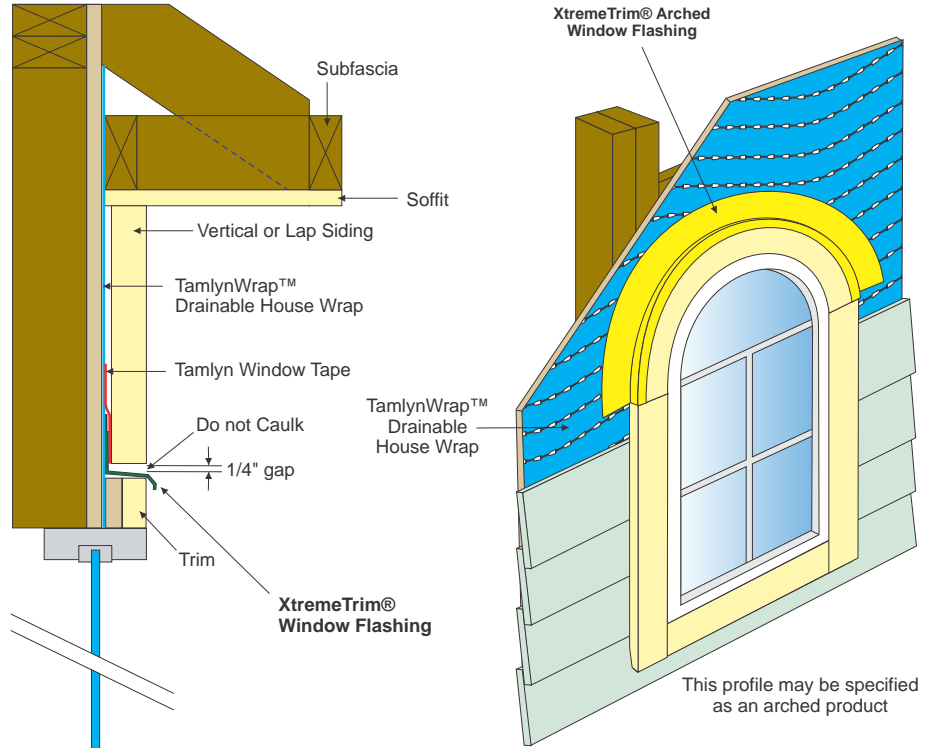

**PRODUCT DETAIL:**

**XtremeTrim® Plank Flash**



**AVAILABLE SIZES:**

ITEM ID	SIDING SIZE	LENGTH
PF5	5-1/4"	5"
PF6	6-1/4"	6"
PF7	7-1/4"	7"
PF8	8-1/4"	8"
PF9	9-1/4"	9"
PF12	12"	11-3/4"

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.


**THICKNESS:** .012" ± .003

**AVAILABLE COLORS:** Available in Primed Arctic White or Light (Navajo Beige), Medium (Khaki Brown) and Dark (Iron Gray).

**PRODUCT DETAIL:**

**ProLine Plank Flash**

Finally a butt-joint flashing that really works!

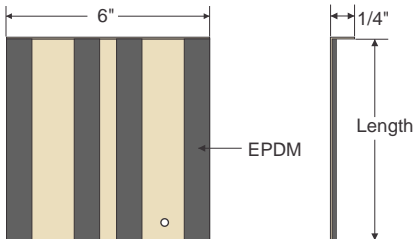

**AVAILABLE SIZES:**



ITEM ID	SIDING SIZE	LENGTH
PLPF6	6-1/4"	6"
PLPF7	7-1/4"	7"
PLPF8	8-1/4"	8"

**DESIGN FEATURES:** Use to reduce moisture penetration behind the joint where two planks butt together and drain water over the top edge of the last full course of siding. Pre-cut for quick and easy installation. Conveniently clips to your belt. Coating eliminates any reaction with fiber cement. Coating/paint means no reflective flashback as found using regular metal flashing. Stiff metal helps hold a tighter seal against the siding to not allow water pressure to enter and wick off to the sides, get past the plankflash and end up behind the siding. Better than using housewrap because housewrap is really intended as an air barrier not a flashing, and has limited uv exposure life. Roofing felt tends to weep and breakdown over time.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

**THICKNESS:** .019" ± .003

**AVAILABLE COLOR:** Navajo Beige

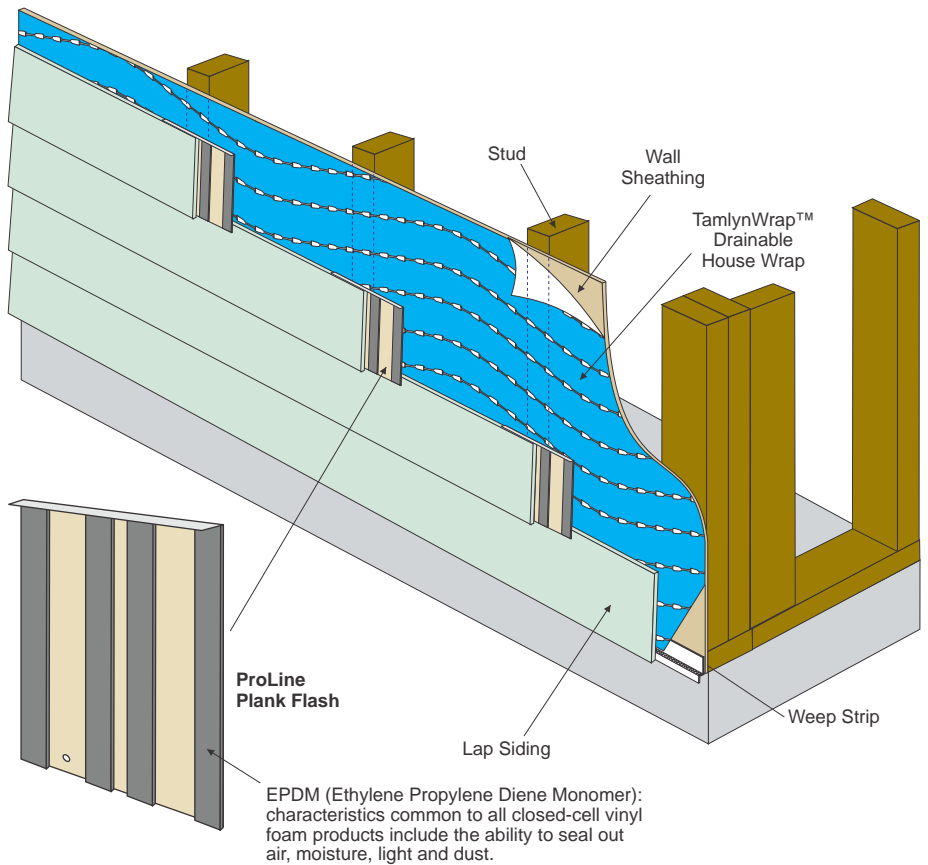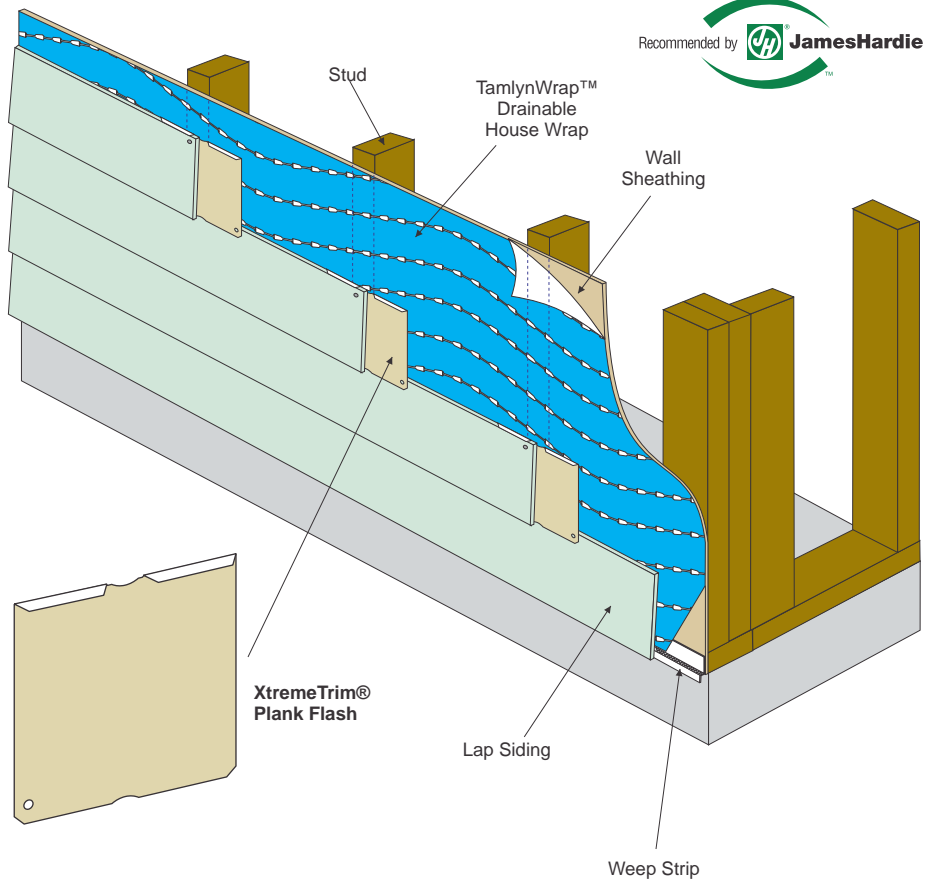

EPDM (Ethylene Propylene Diene Monomer): characteristics common to all closed-cell vinyl foam products include the ability to seal out air, moisture, light and dust.

# Snapvent® Continuous Soffit Vent



EXTRUDED PVC

US Patents #5,799,446 / #5,937,592. US Trademark #2,170,997


**DESIGN FEATURES:** The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Complies with the International Residential Code requiring that ventilation be balanced 50% exhaust / 50% intake (soffit) in all situations including continuous ridge vents. Patents cover use of Tamlyn H Mold at seams. 1/8" holes proven to not allow insects/bugs/bees etc to enter the attic.

**3" and 4" Snapvent®** - 1/4", 5/16" and 5/8" Snapvent® is a must for large attic/steep pitched homes with limited soffit areas available to vent, and multifamily jobs, providing 12.7 and 18.8 sq.in./foot air flow (more attic ventilation = less likelihood of preventable problems such as mold, caused by excessive attic moisture), or use double vents.

**MATERIAL:** Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

**SV143 / SV51638** - Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 4.

**WARNING:** Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

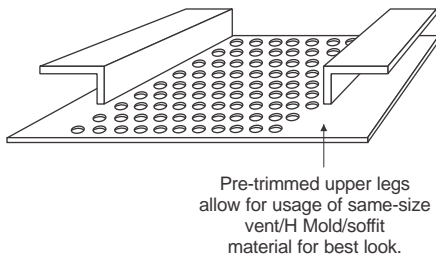

## 2" SNAPVENT®

ITEM ID	PANEL SIZE	LENGTH	NFA*
SV148	1/4" (6mm)	8'	9
SV5168	5/16" (8mm)	8'	9
SV388	3/8" (9.52mm)	8'	9
SV7168	7/16" (11mm)	8'	9
SV128	1/2" (12.7mm)	8'	9
SV348	3/4" (19mm)	8'	9

\*NFA = net free area / sq.in. per lineal ft.

## 3" SNAPVENT®



ITEM ID	PANEL SIZE	LENGTH	NFA*
SV1438	1/4" (6mm)	8'	12.7
SV51638	5/16" (8mm)	8'	12.7
SV5838	5/8" (16mm)	8'	12.7

\*NFA = net free area / sq.in. per lineal ft.

## 4" SNAPVENT®

ITEM ID	PANEL SIZE	LENGTH	NFA*
SV1448	1/4" (6mm)	8'	18.8
SV51648	5/16" (8mm)	8'	18.8

\*NFA = net free area / sq.in. per lineal ft.

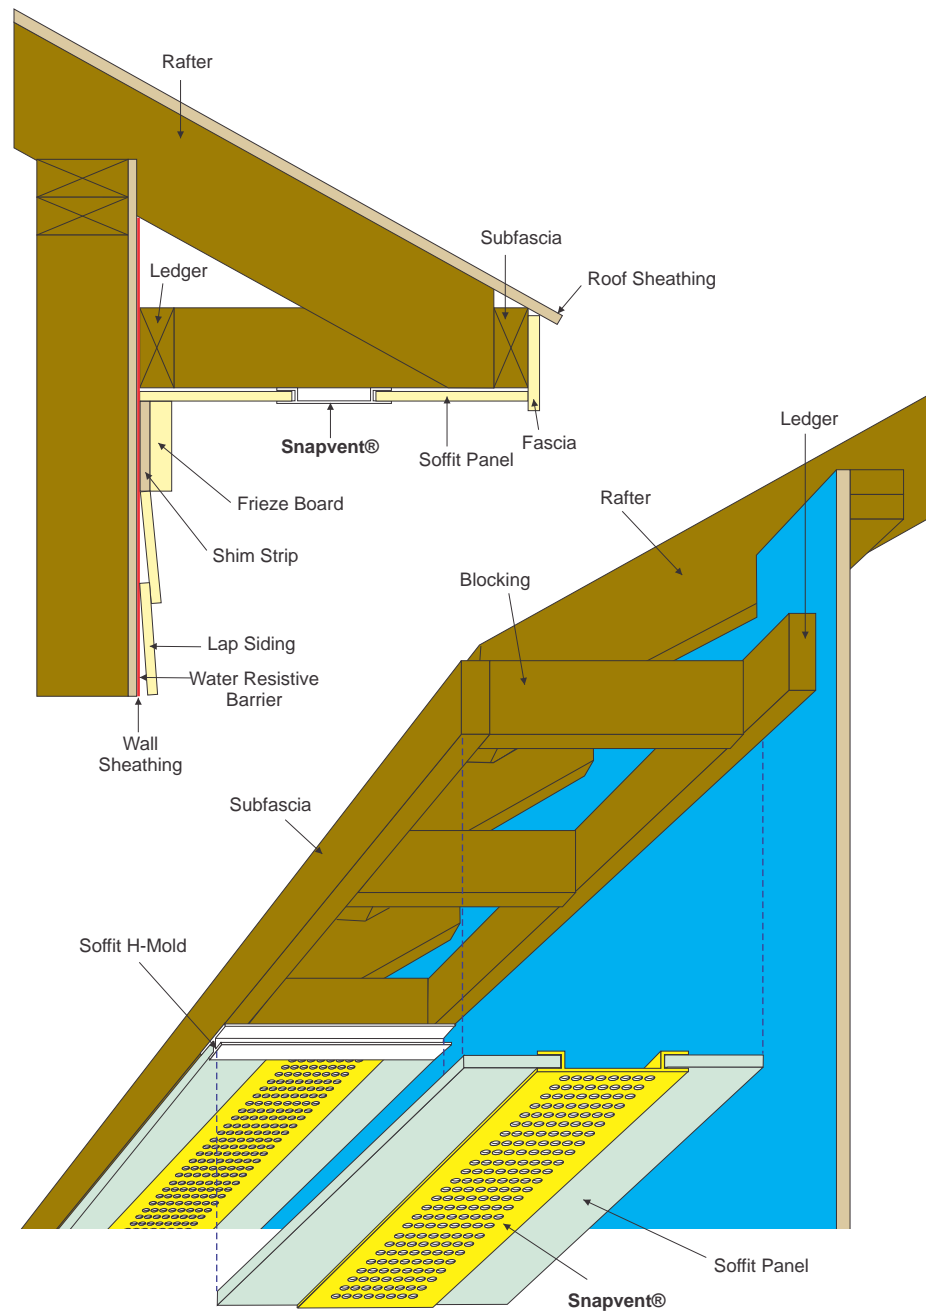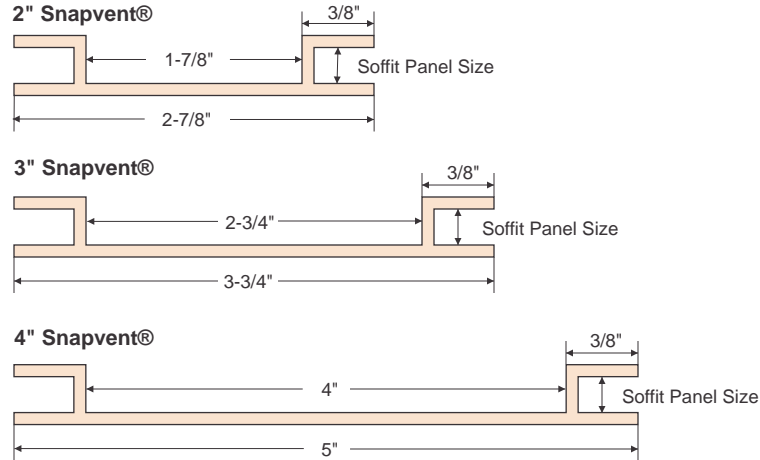

# Ezvent® Continuous Soffit Vent




## EXTRUDED PVC

US Patents #5,881,502 / #5,937,592. US Trademark #2,149,898

**DESIGN FEATURES:** The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Patents cover use of Tamlyn H Mold at seams.

**MATERIAL:** Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

**WARNING:** Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

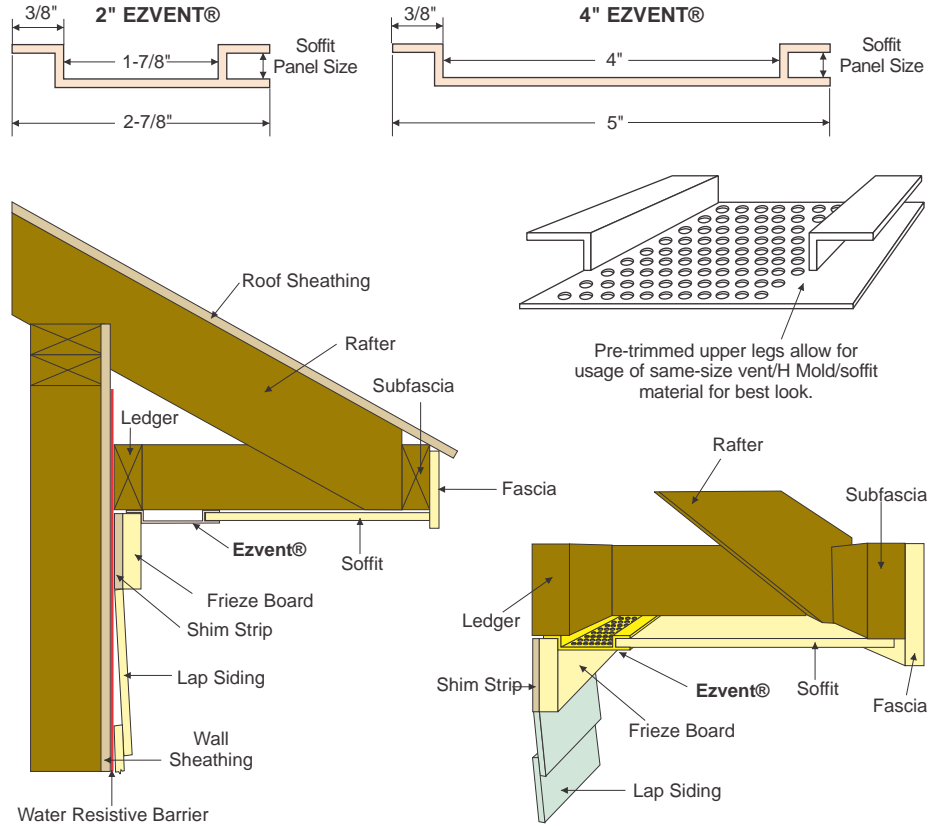

### 2" EZVENT®

ITEM ID	PANEL SIZE	LENGTH	NFA*
EZV148	1/4" (6mm)	8'	9
EZV5168	5/16" (8mm)	8'	9
EZV7168	7/16" (11mm)	8'	9

\*NFA = net free area / sq.in. per lineal ft.

### 4" EZVENT®

ITEM ID	PANEL SIZE	LENGTH	NFA*
EZV1448	1/4" (6mm)	8'	18.8
EZV51648	5/16" (8mm)	8'	18.8

\*NFA = net free area / sq.in. per lineal ft.

# Hat Shaped Continuous Soffit Vent




## EXTRUDED PVC

**DESIGN FEATURES:** Tamlyn vinyl hat-shaped vents are available in 2", 3" and 4" widths to handle nearly any soffit ventilation needs. 3/8" depth works with all soffit thicknesses. Large perforated holes provide excellent intake airflow but inhibit pest entry. Wide Hat Shaped Vent is minimum acceptable for large homes and multi-family, or use double vents. Use Continuous Soffit Vent Connector Clip or Vinyl H Mold to join seams.

**MATERIAL:** Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

**WARNING:** Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

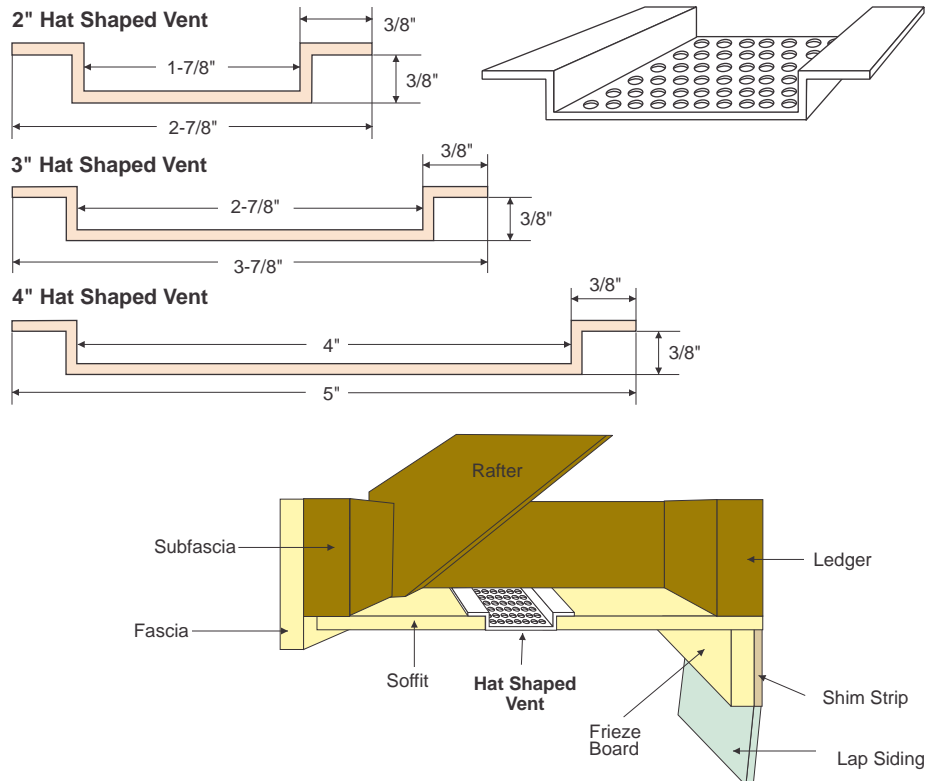

### 2" HAT SHAPED VENT

ITEM ID	LENGTH	NFA*
CUV8V	8'	9

### 3" HAT SHAPED VENT

ITEM ID	LENGTH	NFA*
CUV8VW	8'	12.7

### 4" HAT SHAPED VENT

ITEM ID	LENGTH	NFA*
CUV8V4	8'	18.8

\*NFA = net free area / sq.in. per lineal ft.

# Soffit H-Mold (Soffit Use Only)




## EXTRUDED PVC

**DESIGN FEATURES:** Covers the end seams of the soffit material and continuous vents, providing a more appealing appearance than simply butting the vents end to end.


**MATERIAL:** Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

**HM148 / HM5168 - Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 4.**

**WARNING:** Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

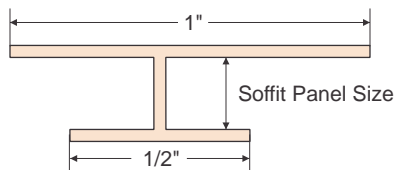

ITEM ID	PANEL SIZE	LENGTH
HM148/12	1/4" (6mm)	8' / 12'
HM5168/12	5/16" (8mm)	8' / 12'
HM3812	3/8" (9.52mm)	12'
HM71612	7/16" (11mm)	12'
HM1212	1/2" (12.7mm)	12'
HM5812	5/8" (16mm)	12'

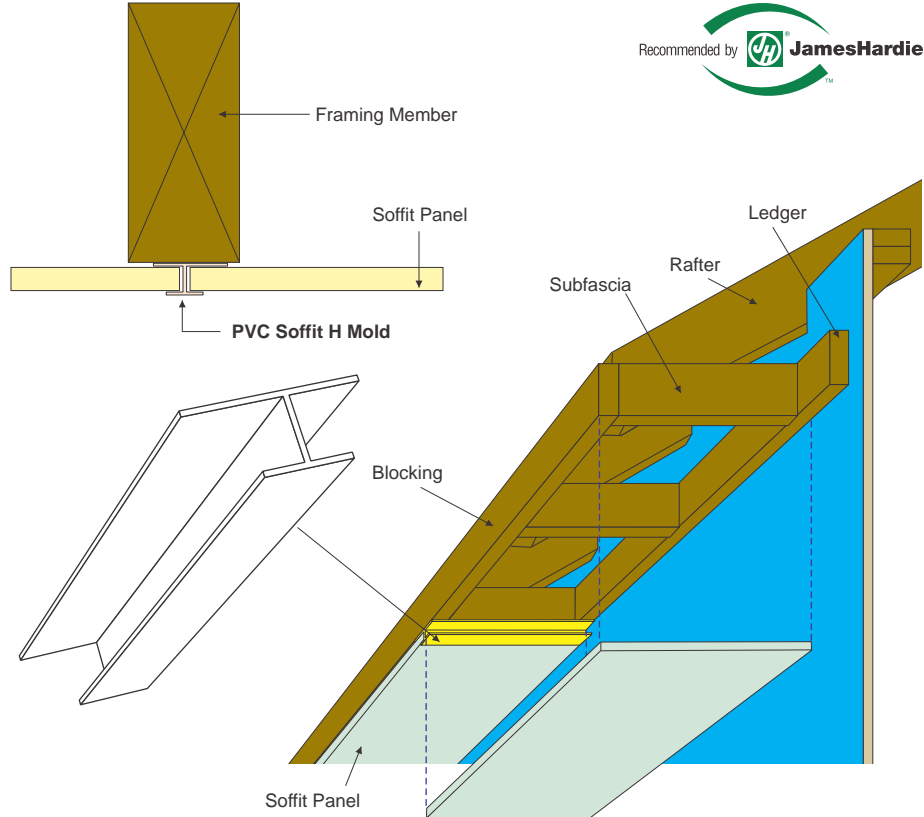

# Continuous Soffit Vent Connector Clip




## EXTRUDED PVC


**DESIGN FEATURES:** Join ends of vinyl continuous soffit vent pieces, creating a very clean look. Allows for expansion/ contraction of soffit material and/or continuous vents and eliminates gaps where pests can enter the attic.

**MATERIAL:** Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

**WARNING:** Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

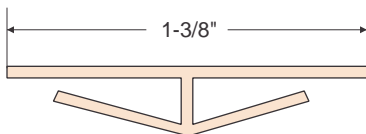

ITEM ID	LENGTH
CONNCLIP	1-13/16"
CONNCLIP265	2.65"
CONNCLIP4	4"

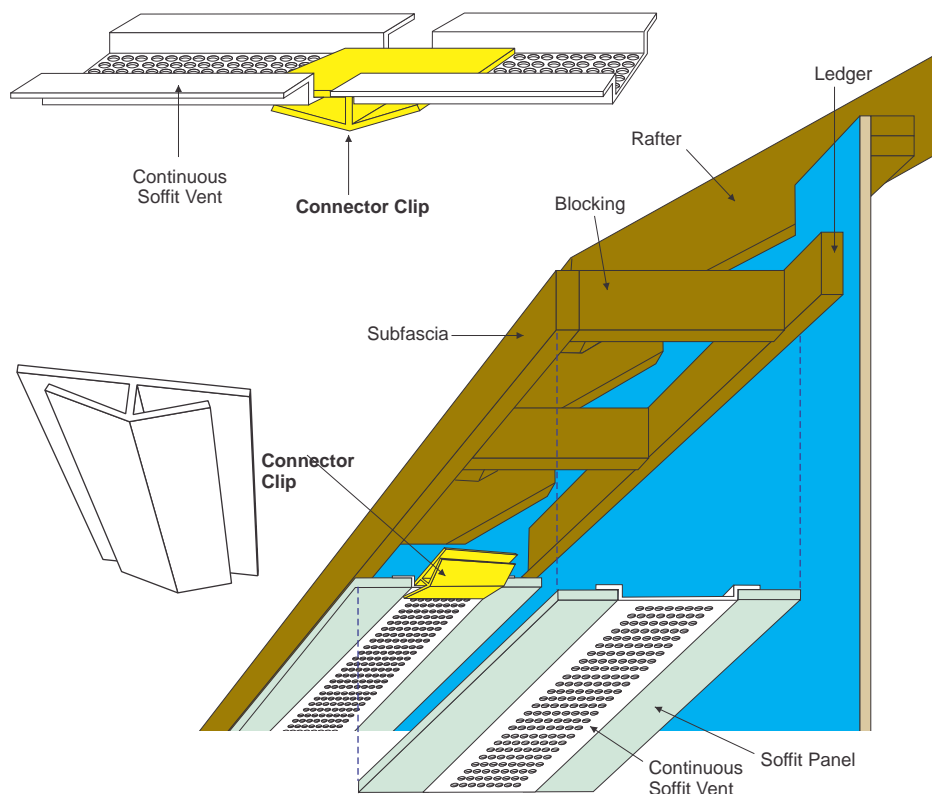

# Weep Strip




## EXTRUDED PVC


**DESIGN FEATURES:** Starter/bottom course for both lap siding and vertical siding. Perforated holes allow any moisture build up behind the siding panels to weep out while preventing pests from entering. The venting also provides cavity ventilation which assists in drying cavity moisture and also helps increase energy efficiency due to the separation between outside heat and interior walls.

**MATERIAL:** Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

**WARNING:** Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

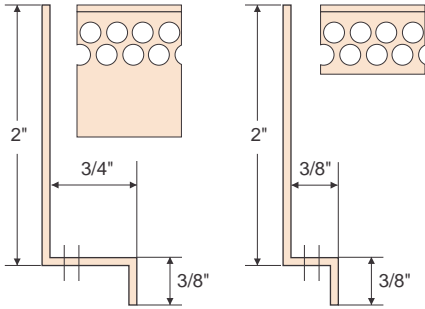

ITEM ID	RAINSCREEN SIZE	LENGTH
VSZ38	3/8" (9.52mm)	8'
VSZ34	3/4" (19mm)	8'

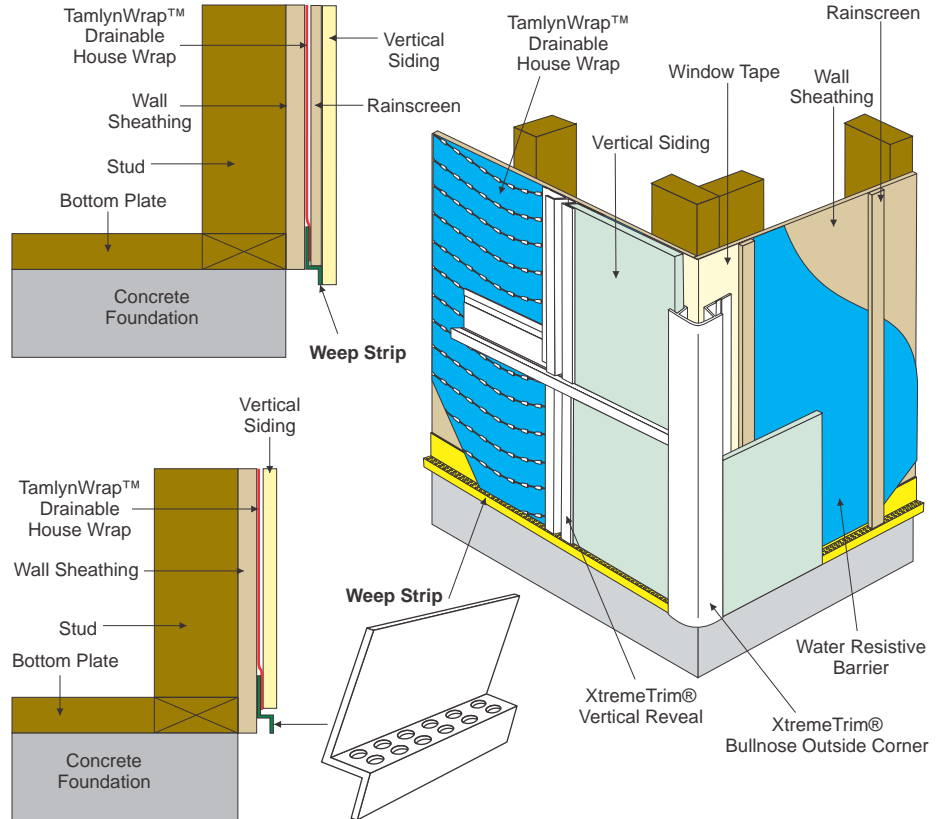

# Vent Strip




## EXTRUDED PVC


**DESIGN FEATURES:** Designed to be installed at the base of vertical siding. The vents allow any moisture build up behind the siding panels to weep out while preventing pests from entering. The venting also provides cavity ventilation which assists in drying cavity moisture and also helps increase energy efficiency due to the separation between outside heat and interior walls.

**MATERIAL:** Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

**WARNING:** Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.



ITEM ID	RAINSCREEN SIZE	LENGTH
VSJ38	3/8" (9.52mm)	8'
VSJ34	3/4" (19mm)	8'

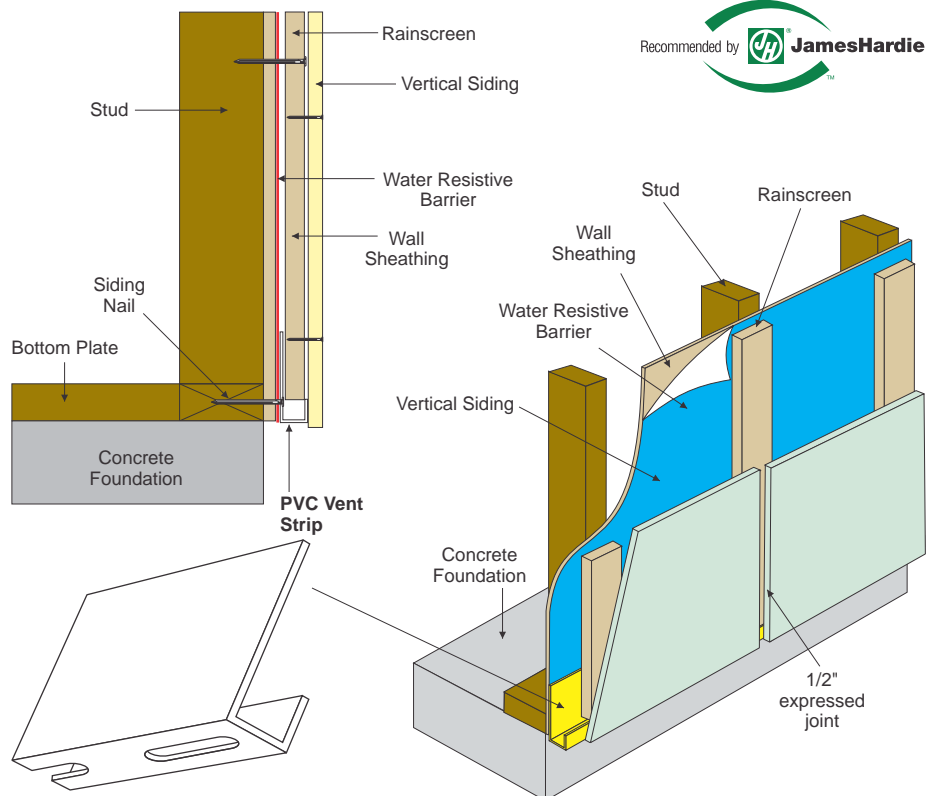

# Counter Flashing



Custom sizes available to fit your specifications !



US Patent #7,784,222

**DESIGN FEATURES:** Designed to provide clearance between siding products and roofs, decks, paths, steps, driveways or any other solid surfaces.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

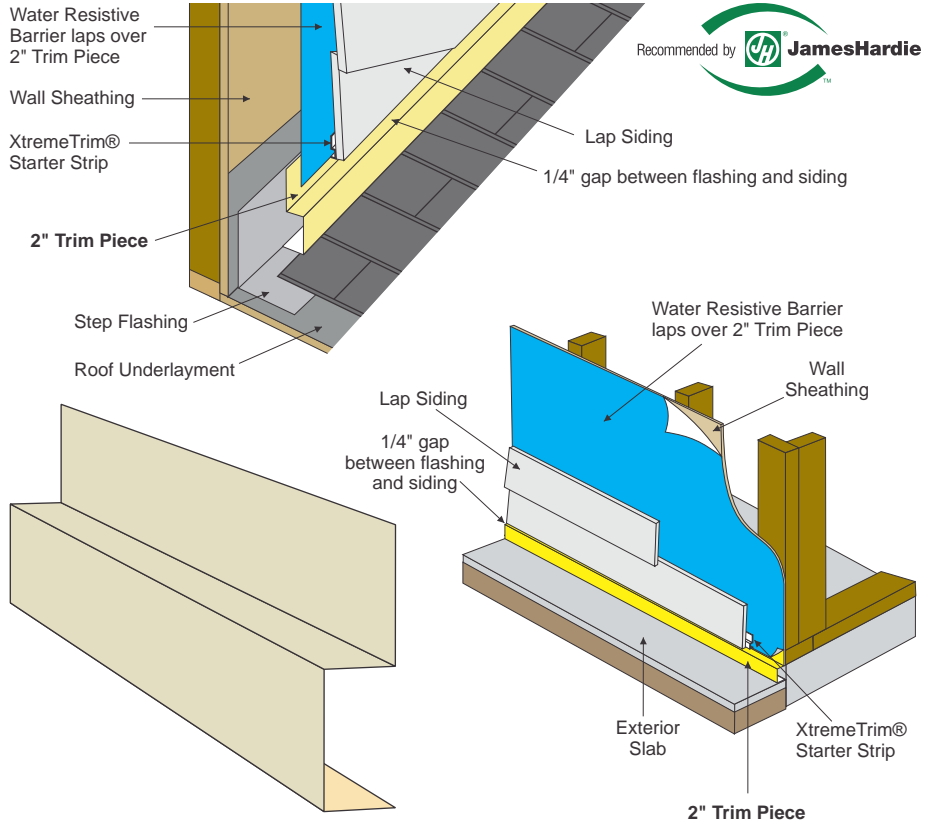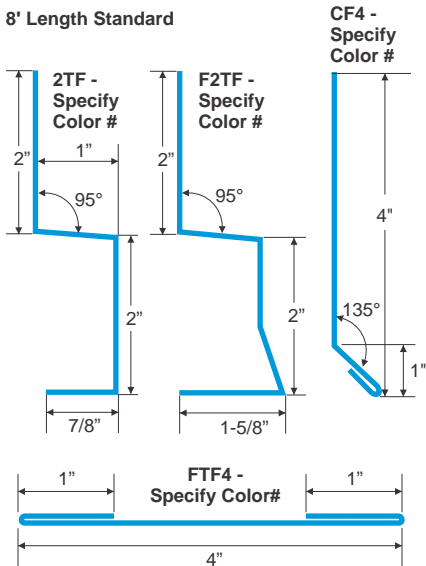

# Reglet Flashing



Custom sizes available to fit your specifications !



**DESIGN FEATURES:** Illustrated are examples of ways TAMLYN can produce appropriate reglet flash for your project. Based on the height of the wall to be flashed, the composition of the wall surface, and whether hidden or exposed fasteners are desired, the fabrication will be produced from first quality materials and is available pre-finished or ready to paint.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

RF - Specify Color #

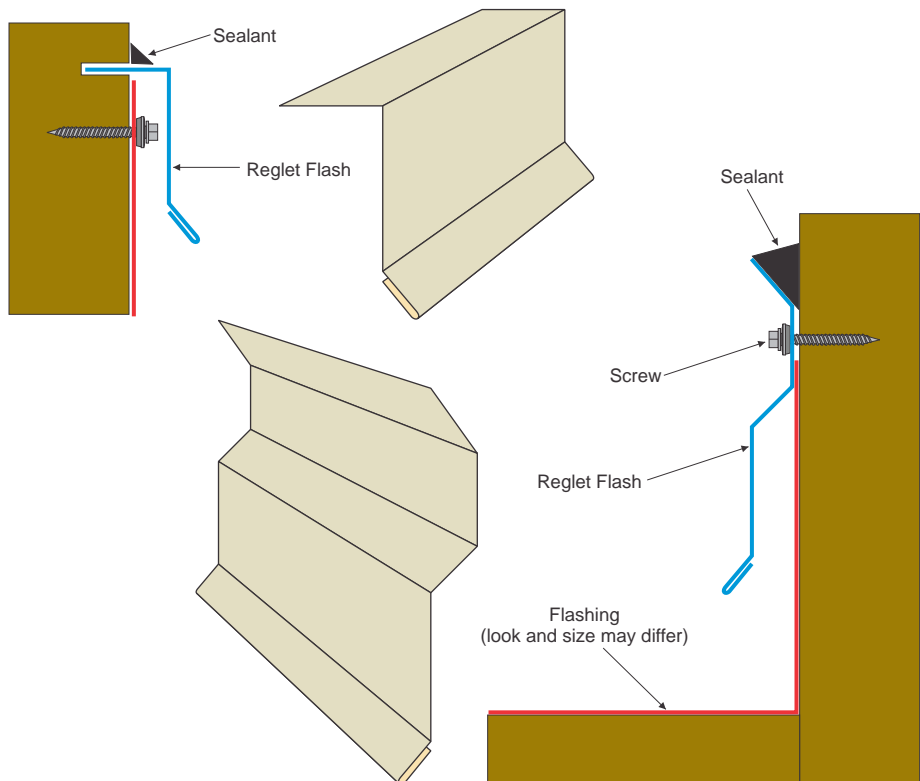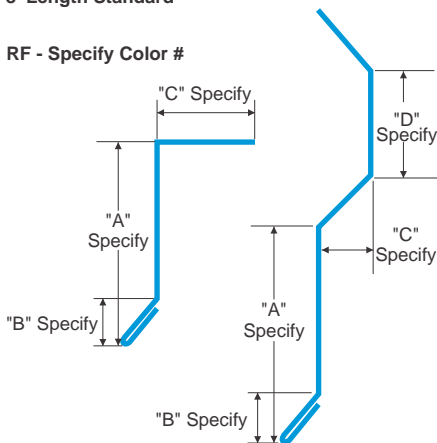

# Angle/Base Flashing








Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

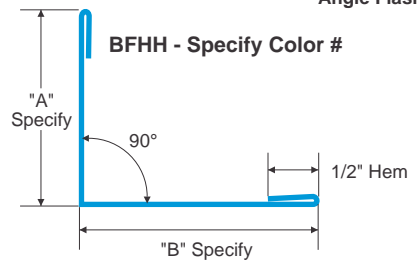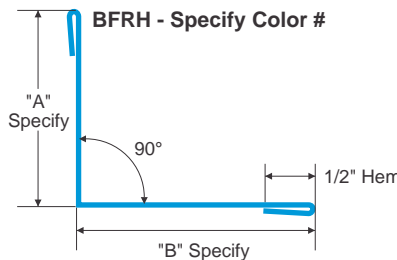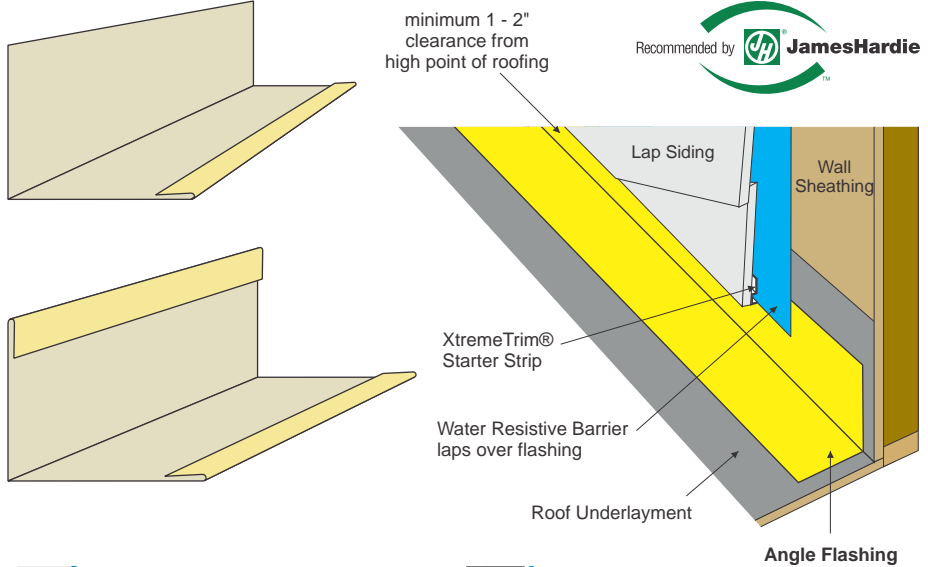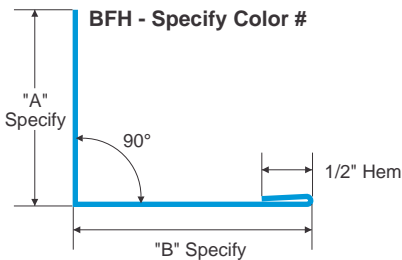

# Step Flashing




Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Multiple uses including chimney and skylight flashing. Furnished in pre-cut, user friendly pieces; no need to spend valuable time cutting 10' flashing pieces to required shorter lengths.


**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

FS - Specify Color #

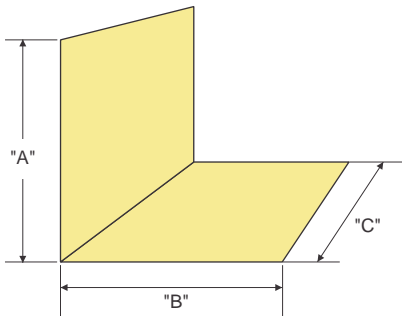

ITEM ID	"A"	"B"	"C"
FS448	4"	4"	8"
FS6612	6"	6"	12"

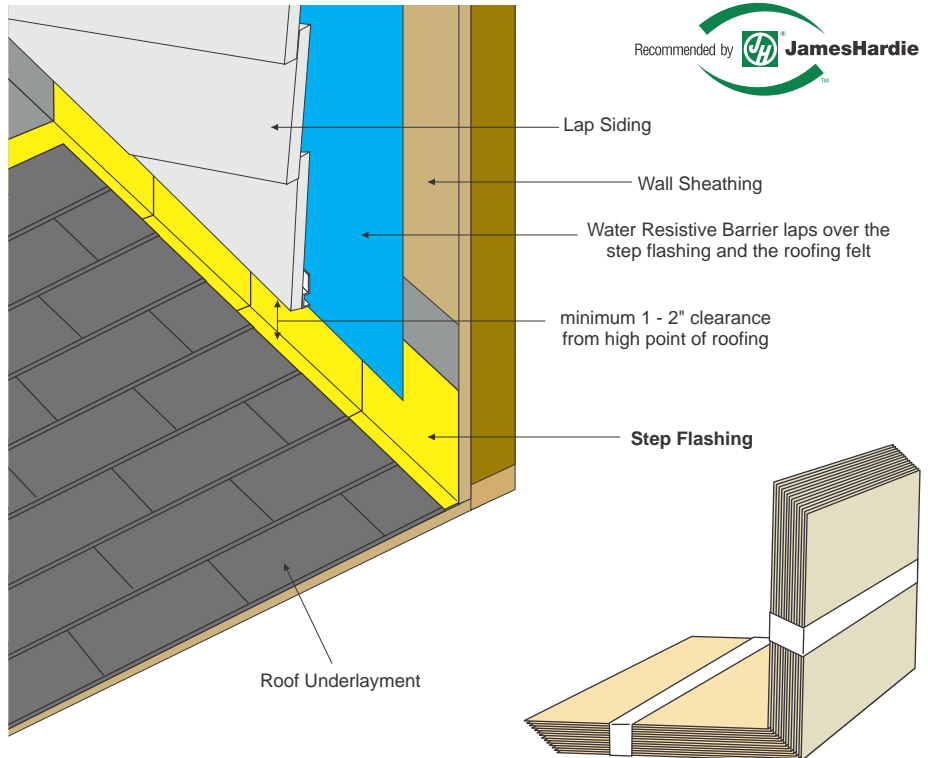

# Overhang Roof Edge




**DESIGN FEATURES:** Deflects water away from fascia board. Extended lip helps prevent shingle damage.


**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

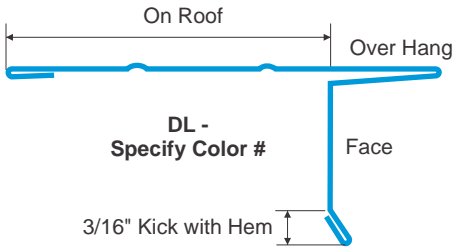

ITEM ID	FACE	ON ROOF	GIRTH
DL145	1"	2-1/8"	4-1/2"
DL1560	1-1/2"	3"	6"

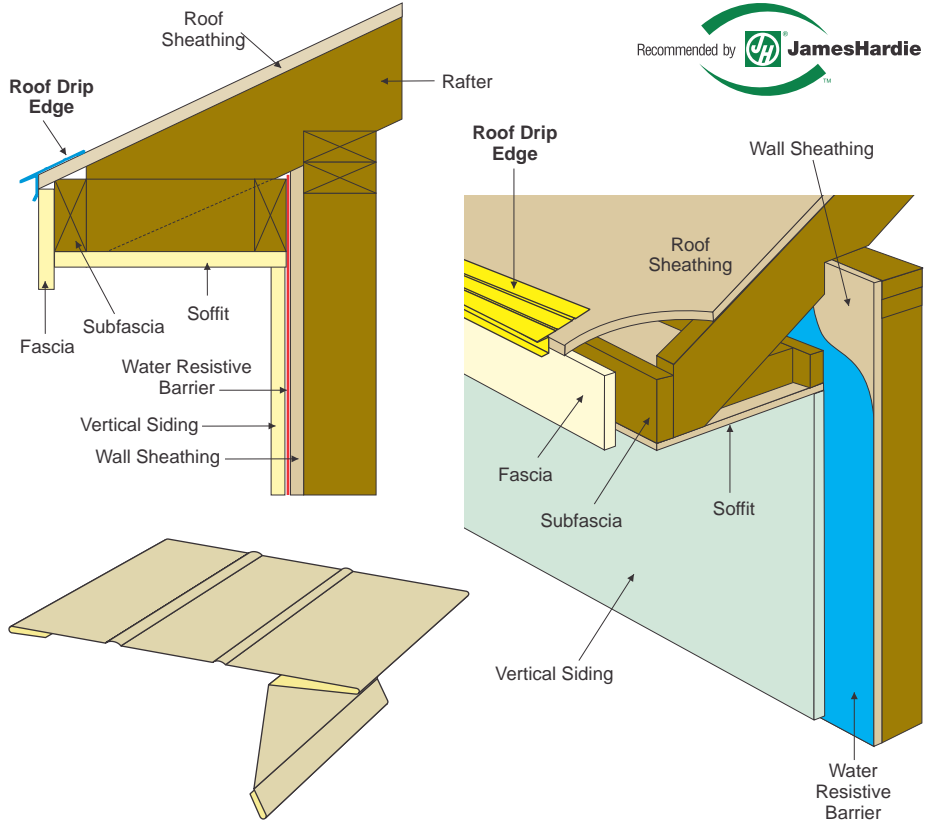

# Angle Roof Edge




Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Deflects water away from fascia board. Extended lip helps prevent shingle damage.


**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

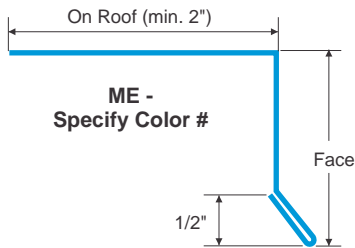

ITEM ID	FACE	ON ROOF	GIRTH
ME130	1"	2"	3"
ME240	2"	2"	4"
ME360	3"	3"	6"
MG130	1"	2"	3"
MG240	2"	4"	6"
MG360	3"	3"	6"

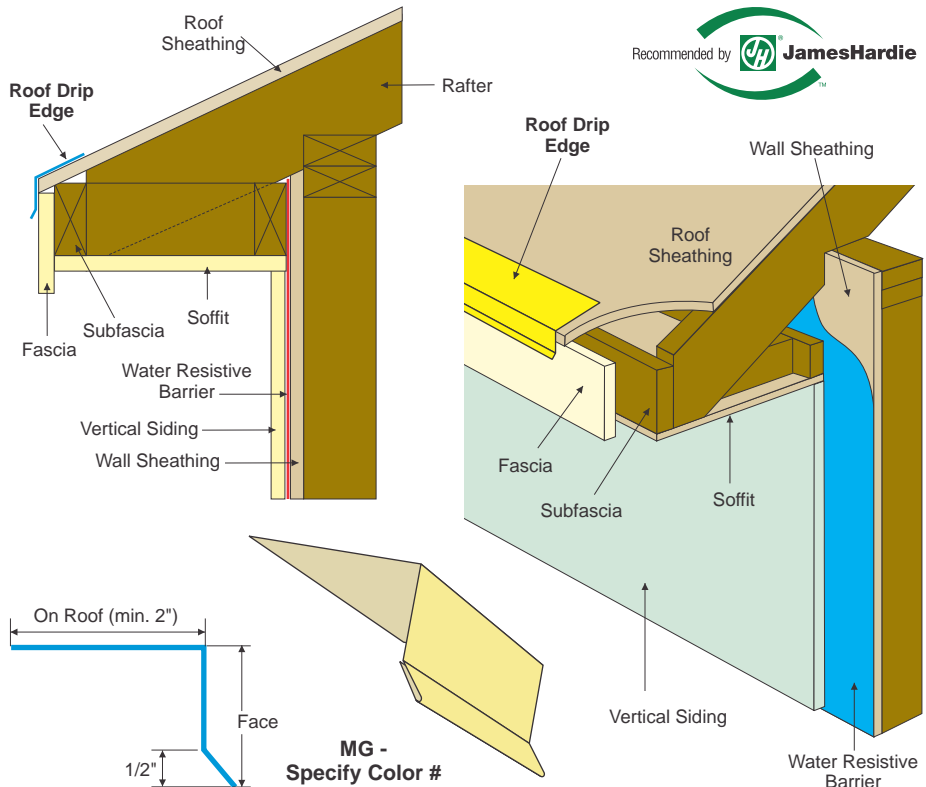

# Gravel Stop Roof Edge





Custom sizes available to fit your specifications !

**DESIGN FEATURES:** The correct edge that is to be installed at the conjunction of a wall surface and a flat or built-up roof deck. TAMLYN offers both a conventional 3/4" knuckle for gravel roofs and a 1/4" knuckle for modified roofing. We can adapt the face and deck dimensions to meet your job requirements, and available in either aluminum or pre-primed galvanized steel.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

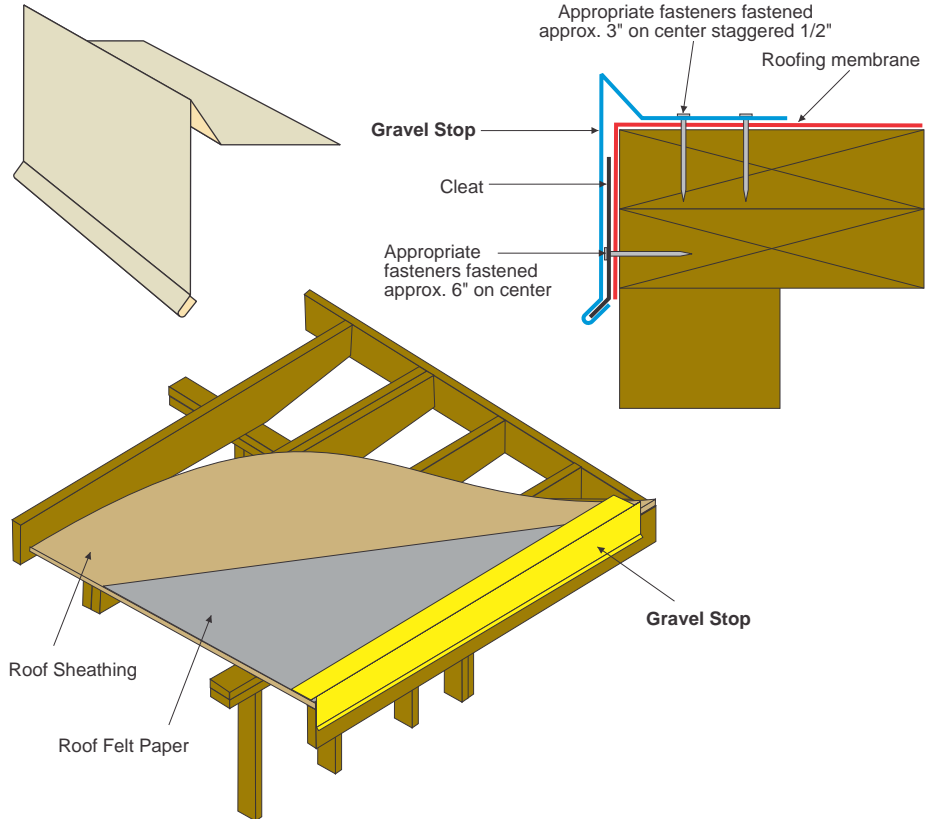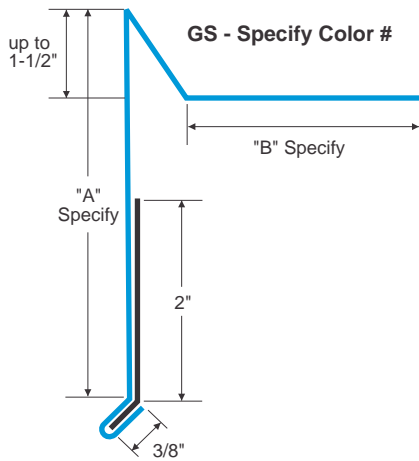

# Fascia Cap Roof Edge





Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Acceptable method of protection. All dimensions are variable based on job requirements, dimensions shown are minimums for those legs. For use with shingle or metal roofs.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

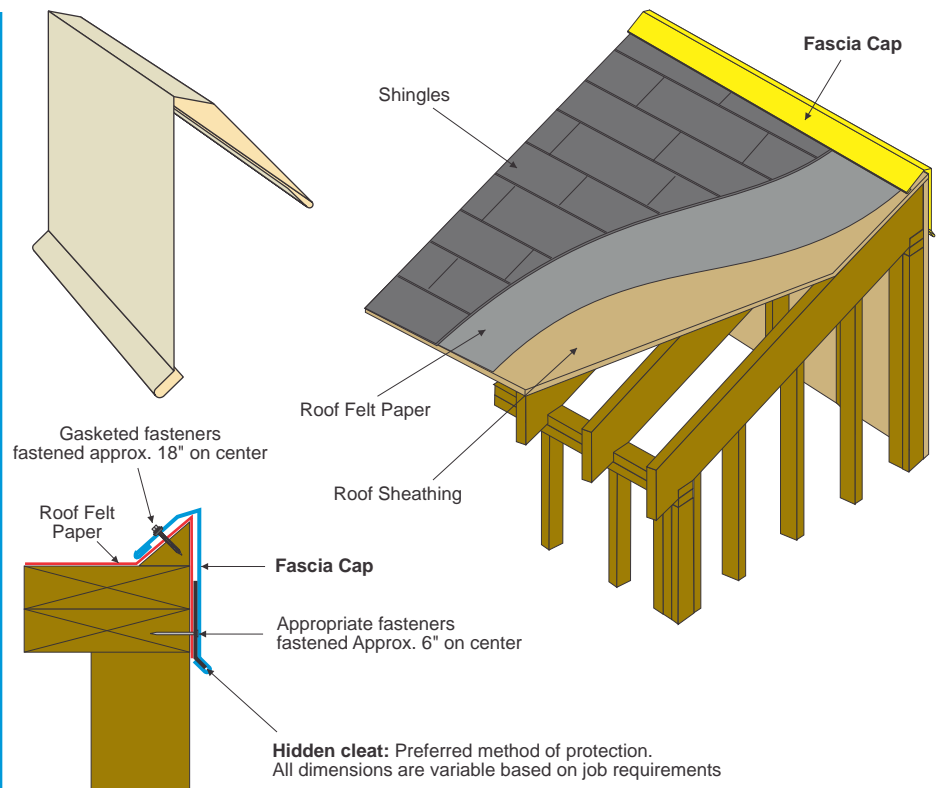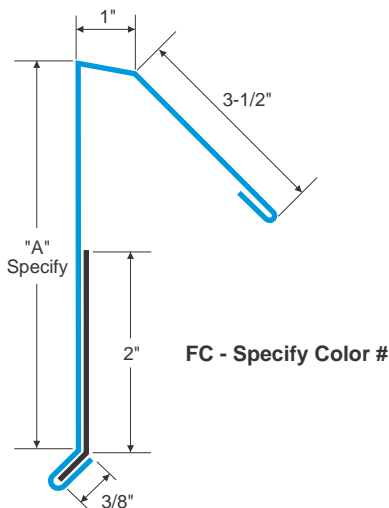

**Hidden cleat:** Preferred method of protection.  
All dimensions are variable based on job requirements

# Window Flashing




Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Window flashing provides an easy to install and long-lasting method of stopping water penetration. Used over window trim, band boards, panel intersections, and other vertical surfaces.


**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

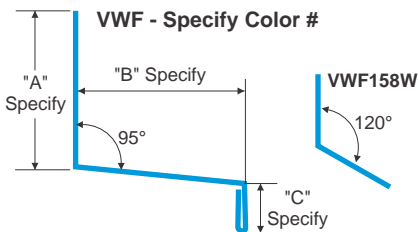

ITEM ID	"A"	"B"	"C"
VWF348	1-1/4"	3/4"	1/2"
VWF18	1-1/2"	1"	1/2"
VWF1148	2-1/4"	1-1/4"	1/2"
VWF1128	2"	1-1/2"	1/2"
VWF158	1-7/8"	1-5/8"	1/2"
VWF1W	4"	1"	1/2"
VWF158W	1-7/8"	1-5/8"	1/2"

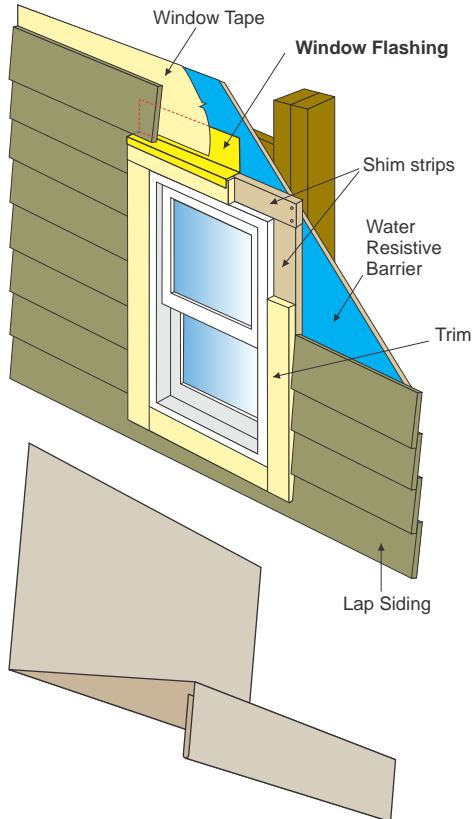

# Deck Ledger Flashing



Custom sizes available to fit your specifications !




**DESIGN FEATURES:** Protects against leaks at walls to deck intersection.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

**WARNING:** A layer of self-stick flexible material such as asphalt or butyl tape should always be used before installing aluminum or galvanized flashing on treated lumber. This prevents a chemical reaction between the flashing and copper azole in treated lumber.

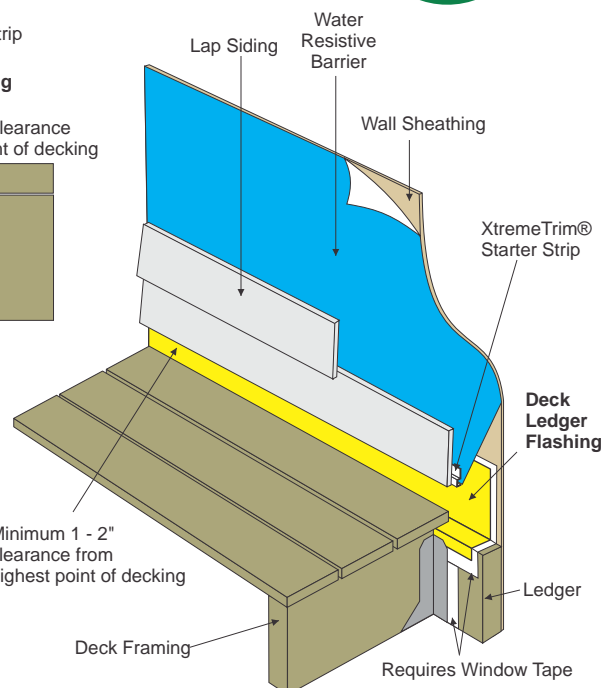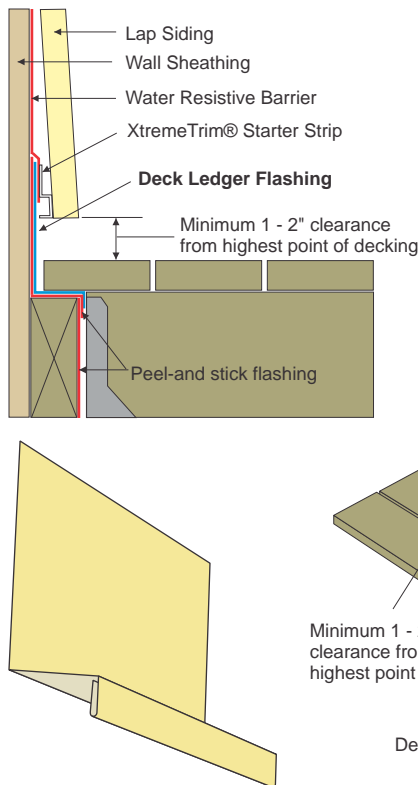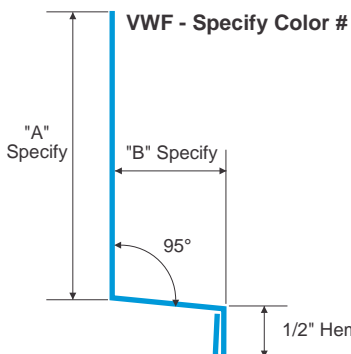

# Inside Corner



Custom sizes available to fit your specifications !

US Patent #5,960,598


**DESIGN FEATURES:** Patented design authentically duplicates the look of a wood corner piece without the maintenance headaches. Eliminates wood inside corner piece that will split/rot over time.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.



Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

XIC, XICJ, XICS Specify Color #



ITEM ID	"A"	"B"	LENGTH
XIC	1-1/2"	7/8"	10'
XICJ	1-1/2"	1-1/2"	10'
XICS	2"	1-1/2"	10'

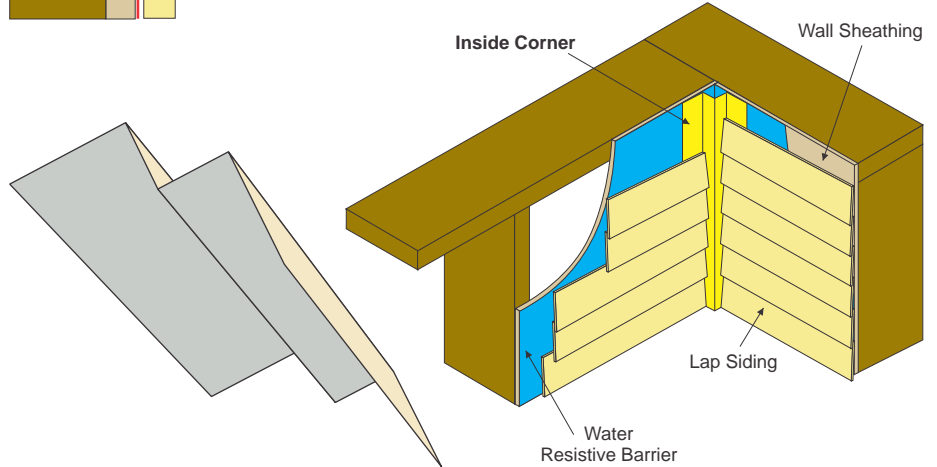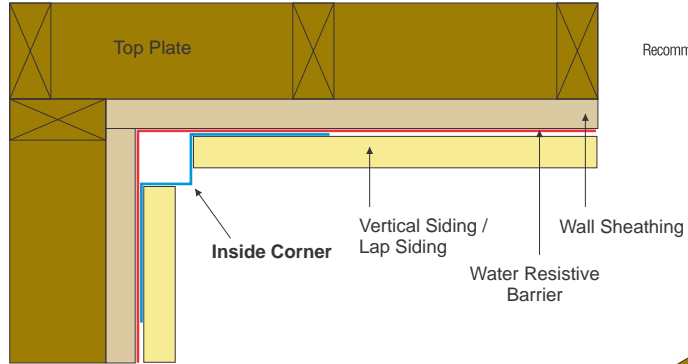

# Outside Corner



Custom sizes available to fit your specifications !




**DESIGN FEATURES:** Provides a good looking, durable outside corner with lap siding.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

XOCBT4 - Specify Color #

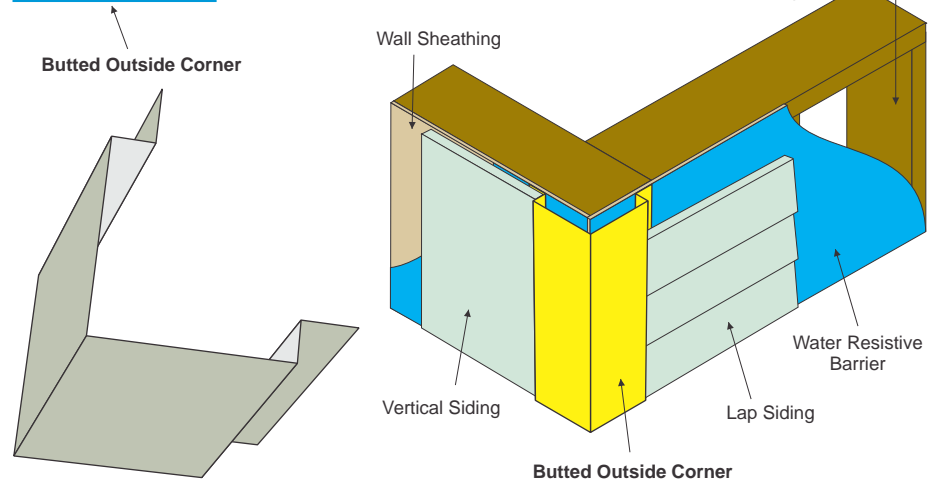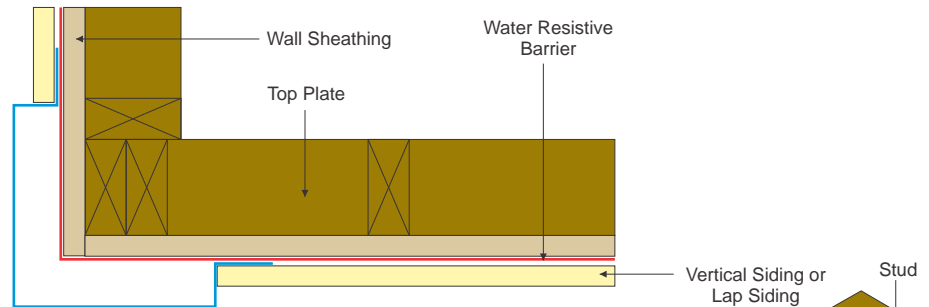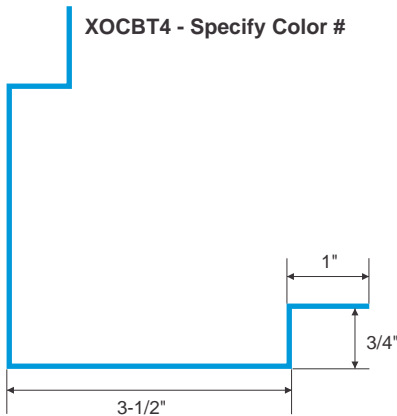


# Individual Outside Corner




**DESIGN FEATURES:** The traditional corner look that emulates hand fitted board junctions at the corners of siding plank walls. The individual corners create the "sawtooth" look that has a timeless appeal on Craftsman and other walls. Available in sizes for each common plank width and in both smooth and textured finishes to compliment the siding being used.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

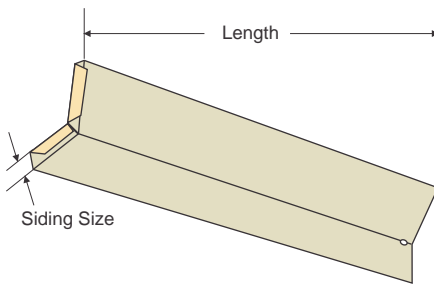

ITEM ID	SIDING SIZE	LENGTH
OCI6	5/16"	6-1/4"
OCI7	5/16"	7-1/4"
OCI8	5/16"	8-1/4"
OCI9	5/16"	9-1/4"
OCI12	5/16"	12"

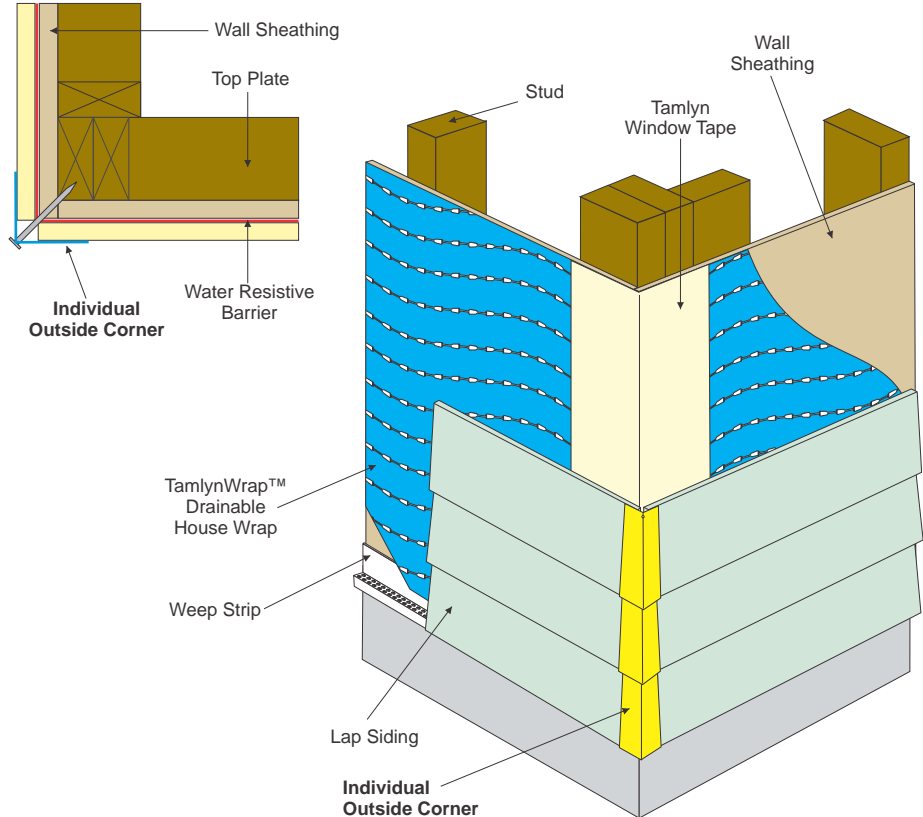

# Z Flashing




Custom sizes available to fit your specifications !


**DESIGN FEATURES:** Z Flashing provides an easy to install and long-lasting method of stopping water penetration. Used over window trim, band boards, panel intersections, and other vertical surfaces.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4. 8' Length Standard

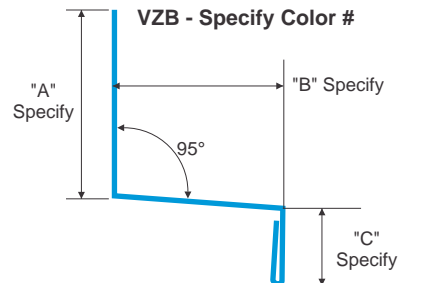

ITEM ID	"A"	"B"	"C"
VZB5168	1-3/16"	5/16"	1/2"
VZB5168W	4"	5/16"	1/2"
VZB388	1-1/8"	3/8"	1/2"
VZB7168	1-1/16"	7/16"	1/2"
VZB128	1"	1/2"	1/2"
VZB588	1-3/8"	5/8"	1/2"

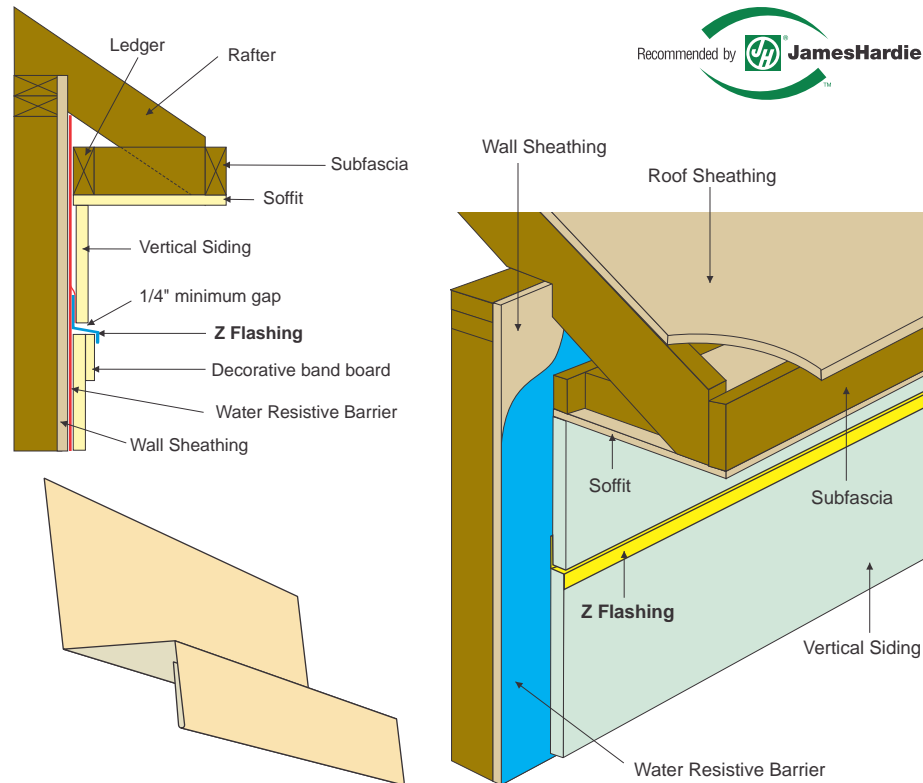

# J Flashing




Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Covers the top edge of siding at the soffit or intersections and at door and window openings. Isolates the edges of trim or siding from the mortar or masonry. Vertical use only in open areas. Can be used in horizontal areas where moisture and rain is not a factor.


**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard



ITEM ID	"A"	"B"	"C"
JMF5168	1-1/4"	5/16"	1/2"
JMF388	1-5/8"	3/8"	1/2"
JMF128	1-1/2"	1/2"	1/2"
JMF588	1-3/8"	5/8"	1/2"
JMF348	1-1/4"	3/4"	1/2"
JMF788	2"	7/8"	1"

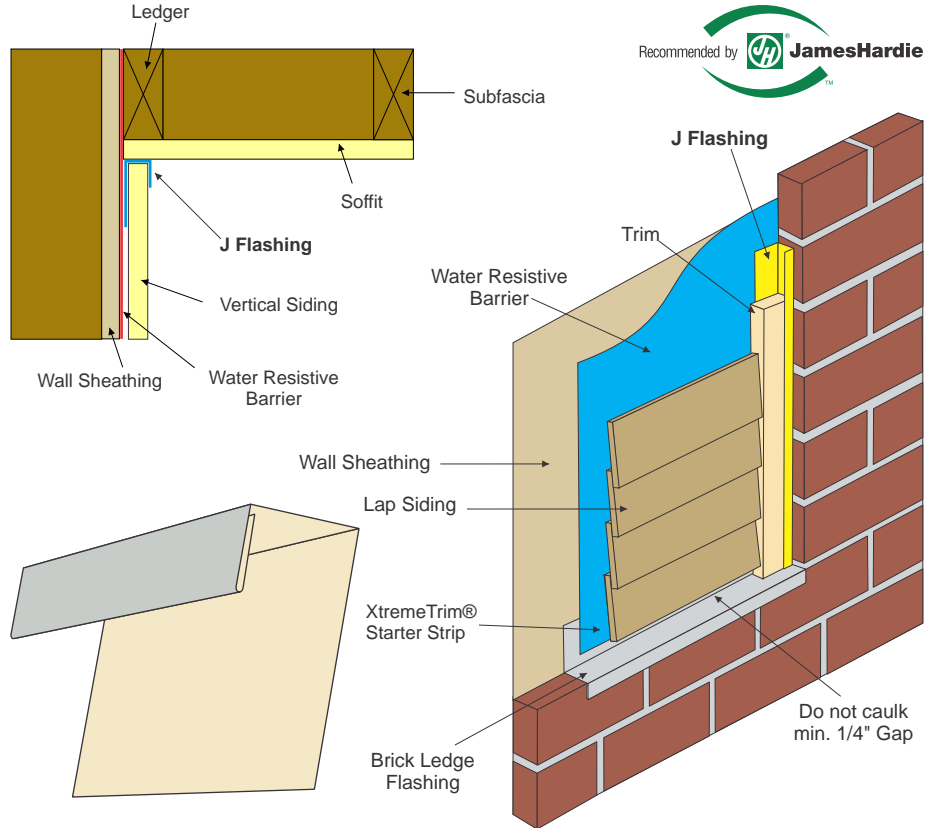

# Parapet/Coping Flashing





Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Utilizing your own custom design, we will fabricate a coping flashing to cover and protect your parapet wall design from high grade aluminum or steel sheets. Whether you prefer a simple screw through or more complex, hidden fastener style, we are able to build what you require. The examples shown indicate styles commonly used.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

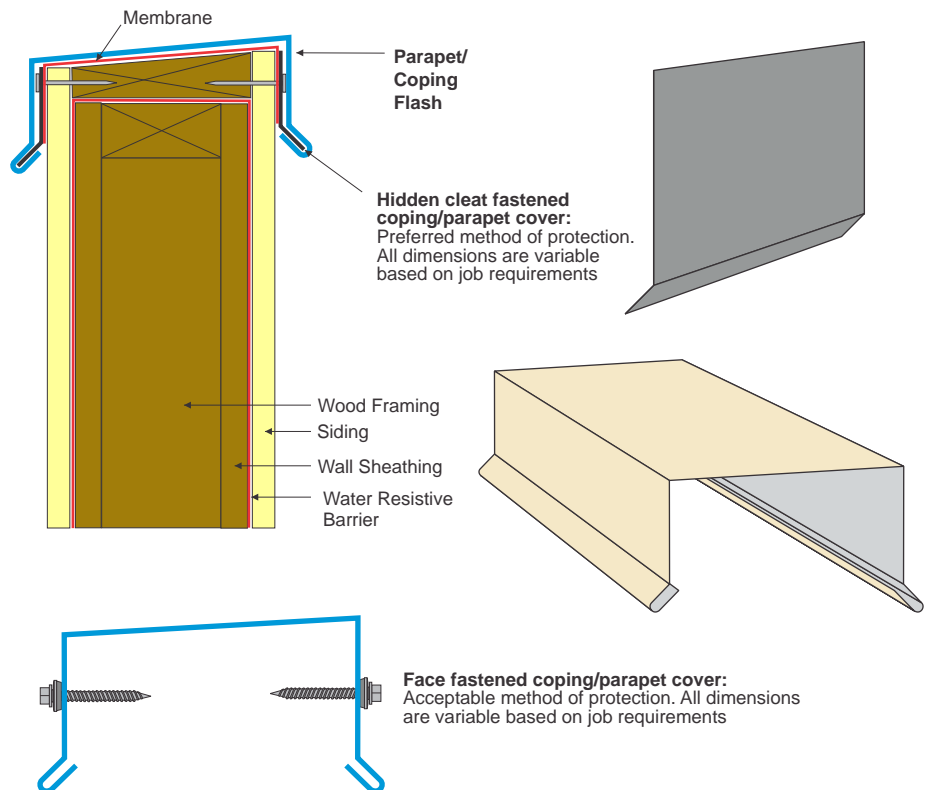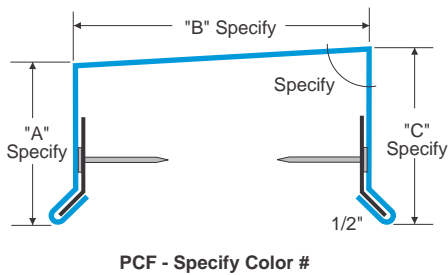

# Horizontal Transition





Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Horizontal transition from vertical siding panels to lap siding.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

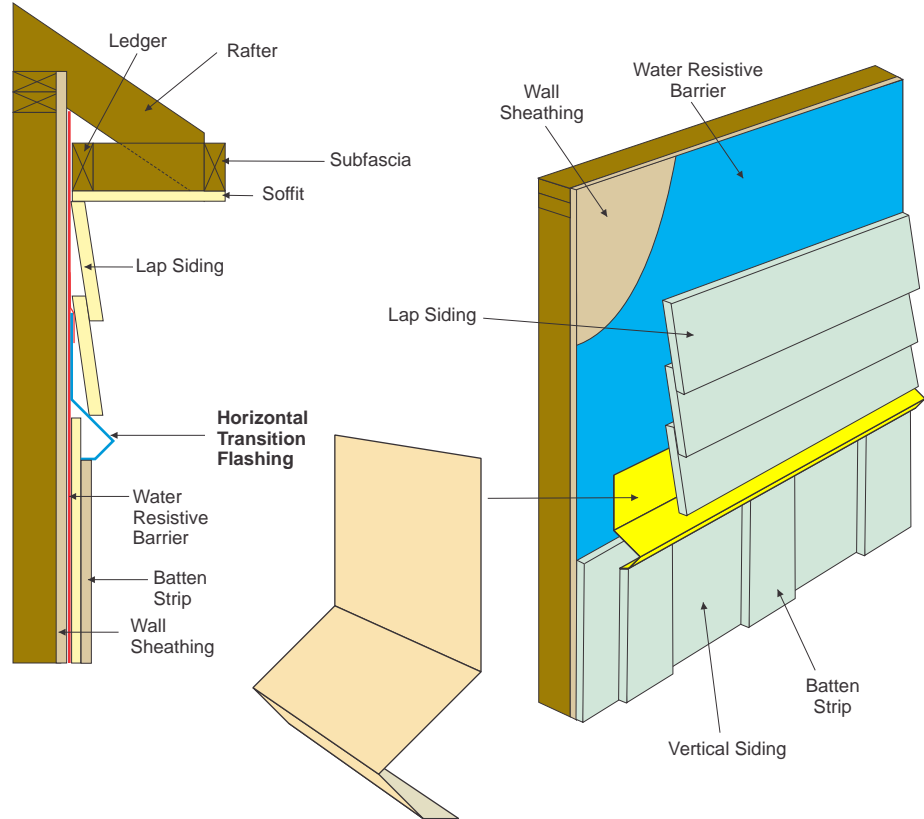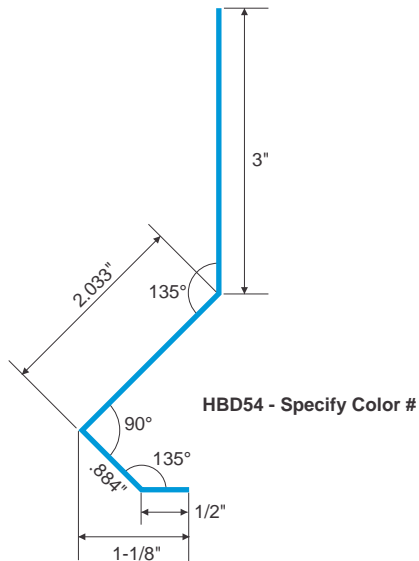

# Brick/Stone Ledger Flashing





Custom sizes available to fit your specifications !

**DESIGN FEATURES:** Designed to prevent siding and trim to be butted directly against mortar or masonry, including stone and brick.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 4.

8' Length Standard

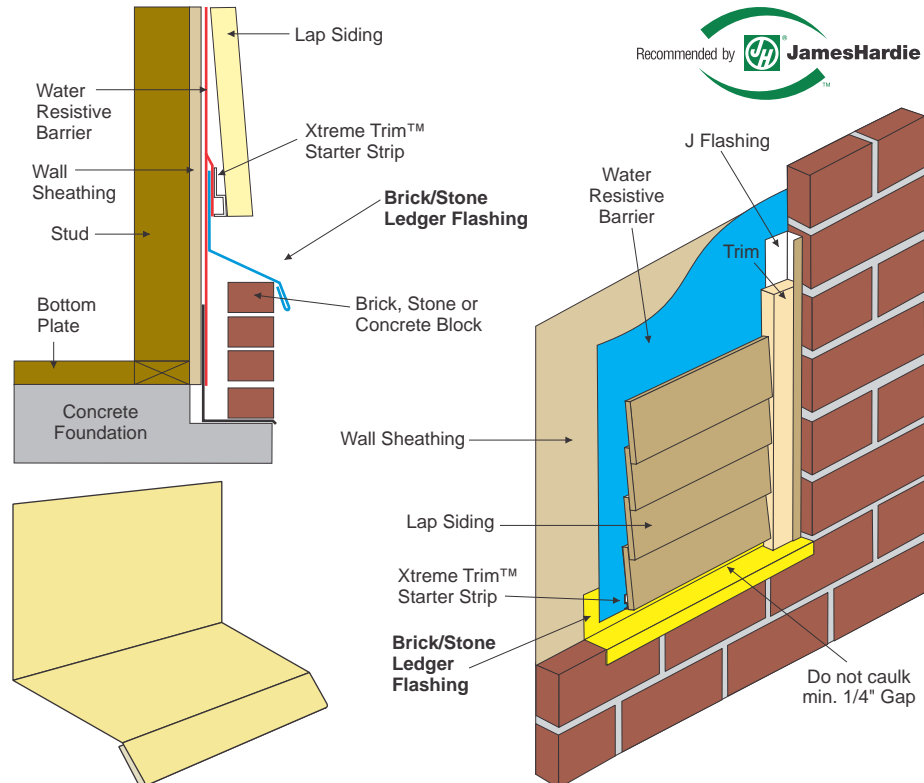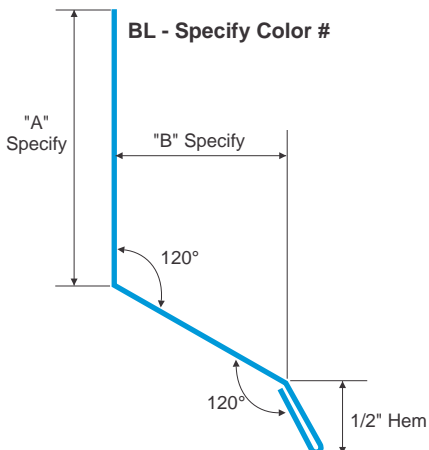

Custom sizes available to fit your specifications !

**DESIGN FEATURES:**




XtremeCoil is designed for residential and light commercial applications. Trim coil can be field formed to provide low-maintenance coverings for exterior trim surfaces such as window and door casings, window sills, drip caps, fascias, porch posts, louvers, flashings, etc.

XtremeCoil is available in most popular James Hardie siding & trim colors and is available in a 24" x 50' roll. Also available in 4", 8", 12" and 24" x 8' flat stock.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

**WARNING:** Direct contact of aluminum Product(s) with certain dissimilar materials or contact with the water run-off from such materials is likely to result in corrosion, which is not covered by the Warranty.

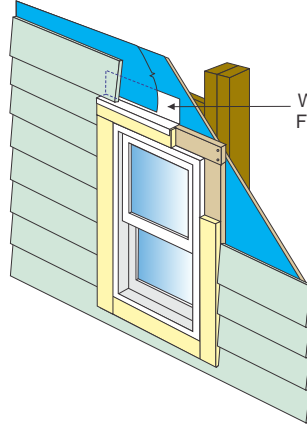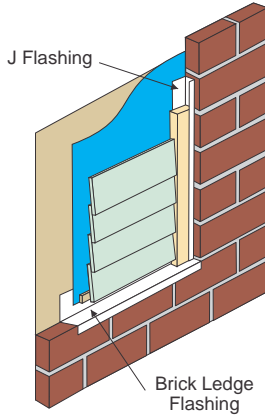

**INSTALLATION GUIDELINES**

Aluminum expands when temperatures rise and contracts whenever temperatures drop. Shapes, especially longer ones, must be able to move slightly. Failure to allow movement can result in bulging or buckling when temperature changes significantly.

Allow approximately 1/16" space between the ends of shapes and fixed objects, such as the walls of inside corners.

Nail shapes into place using painted aluminum or stainless steel trim nails. Drill oversized nail holes and do not nail too tightly. Nails should penetrate the wood a minimum of 3/4."

Never face nail fascia shapes.

Bending a doubled-over hem on the edges of shapes will increase their strength and help assure wave-free edges.

Be sure that any joints are overlapped in the proper direction and by a sufficient amount to shed water.

Do not install coated aluminum trim coil in locations subject to standing water for sustained periods of time.

Do not place aluminum shapes in corrosive environments or in direct contact with corrosive materials.

**BENDING TRIM COIL**

XtremeCoil can be used to make custom aluminum trim shapes using a portable brake. Brakes are available in

lengths up to 12 ft. Follow the brake manufacturer's instructions for using the brake.

**CUTTING TRIM COIL**



XtremeCoil can be cut with duckbill tin snips or aviation shears for short or curved cuts. For longer straight cuts, it is easiest to use a sharp heavy-duty utility knife to score the coil, then bend the coil back and forth on the score line until it breaks. If you are using a portable brake, position the coil in the brake and clamp it down so that the brake's jaws align with where the cut is to be made. Score the coil along the straight edge of the brake jaw with the utility knife, then bend the coil back and forth on the score line until the coil breaks.

# Kick Out Flashing

**DESIGN FEATURES:** Kick out flashing is used where a lower roofline terminates against a vertical wall. The kick out is installed above the rain gutter or drip edge where the roof meets a vertical wall. It kicks out rain water and diverts it away from the lower wall. For use with 8/12 pitch or less.

**MATERIAL:** Aluminum sheet coated on both sides with paint system that is specifically formulated for residential exterior applications.

Available in most popular siding and soffit colors. Specify color code using Color Palette on page 4.

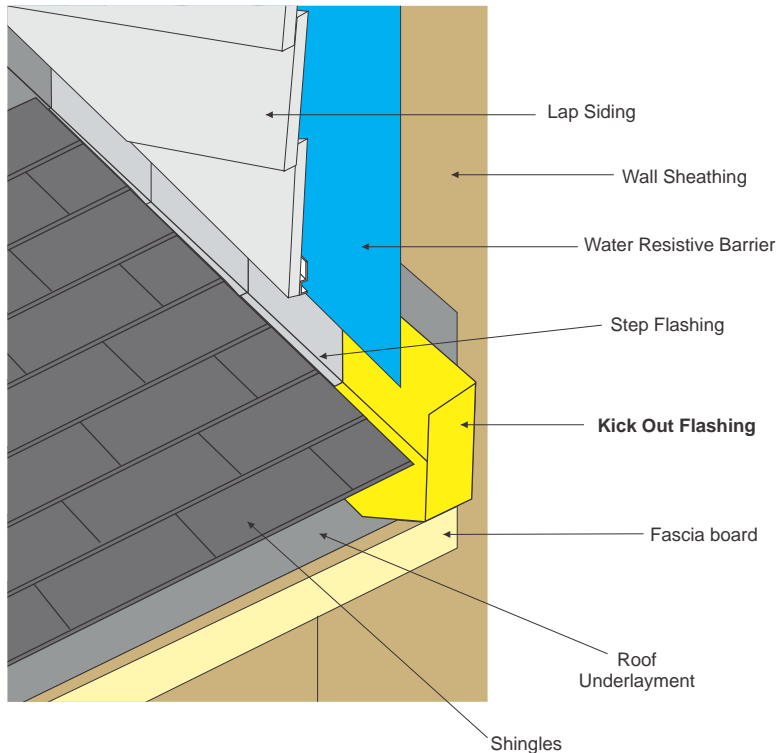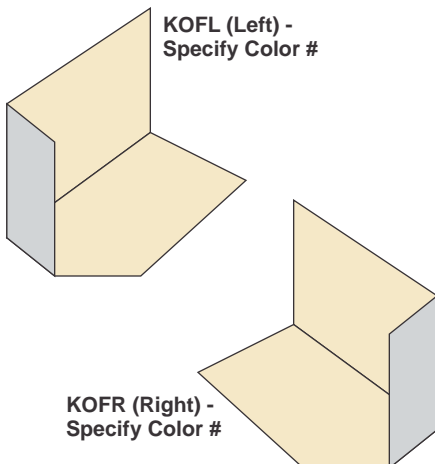

# TamlynWrap™ Drainable House Wrap





"When Doing It Right Matters"

**DESIGN FEATURES:** TamlynWrap™ Drainable House Wrap provides advanced moisture management. TamlynWrap™ minimize trapped moisture from an exterior wall and prevent the damaging effects of mold and rot. Provides faster cavity dry time from a wall versus standard housewraps. 1.5mm gap for better drainability.

EXCEEDS AC38, INCLUDING NEW DRAINAGE PROVISION

**ROLL SIZE:** 5ft Width x 100' Length

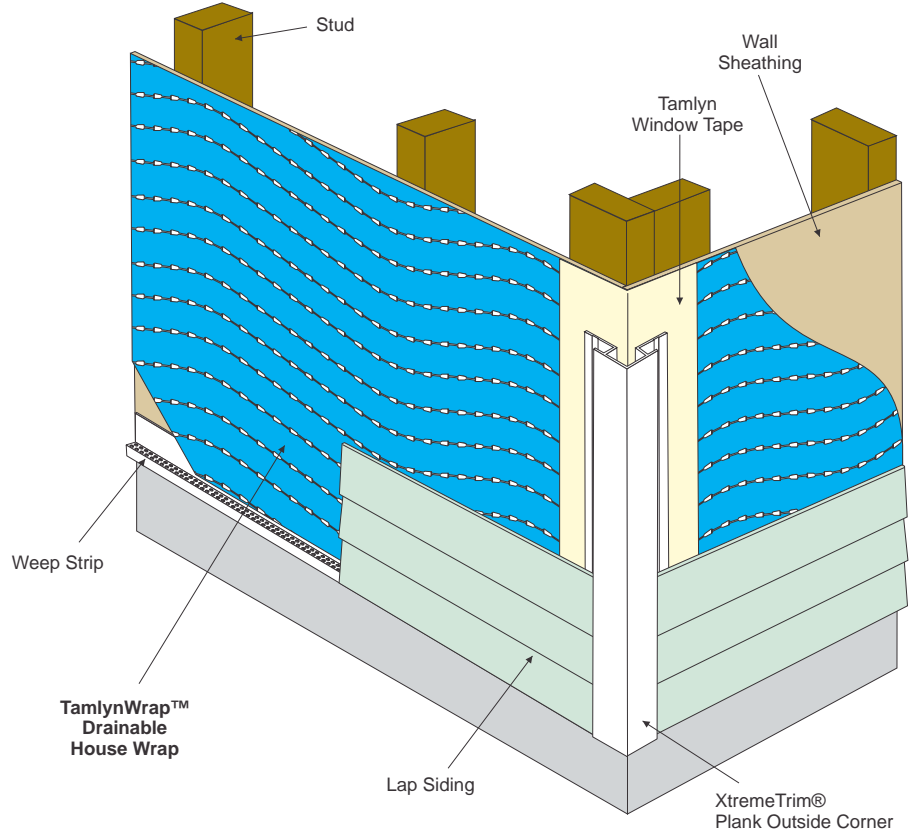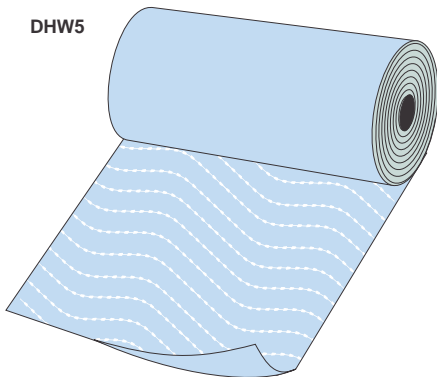

# Tamlyn Window Tape



"When Doing It Right Matters"

**DESIGN FEATURES:** Tamlyn WindowTape is a self-adhering, self-sealing waterproofing tape designed for use around windows, doors, building seams and in general construction. It is composed of a white polymer film that is coated with an aggressive Broad Temperature Spectrum (BTS™) asphalt adhesive. A release liner protects the adhesive and is removed as the tape is installed.


The BTS™ adhesive self-seals around punctures such as nails and staples. This advanced system bonds to all common building and window materials and seals around fasteners to prevent damage caused by water penetration.

**INTENDED USES:** Install on the window sill to protect against moisture that can contribute to rot, mold and mildew. Use to seal the window flange to the building wall in new construction to prevent window leaks, seal around doors, under siding, exterior plaster, sill plates and wall joints, or in any application where the membrane is protected from long-term ultraviolet exposure.


**AVAILABLE SIZES:** Width 4", 6", 9" and 12", Length 75' and 100'




## STEP 1 - Sill Flashing

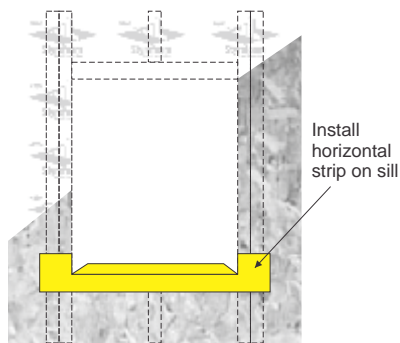


## STEP 2 - Set Window

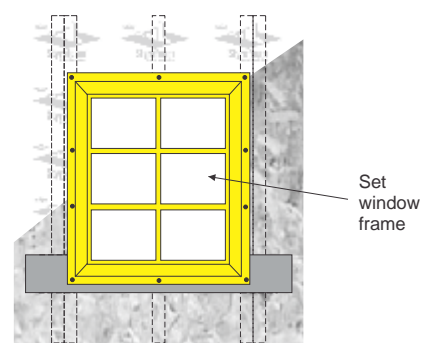

## STEP 3 - Jamb Flashing

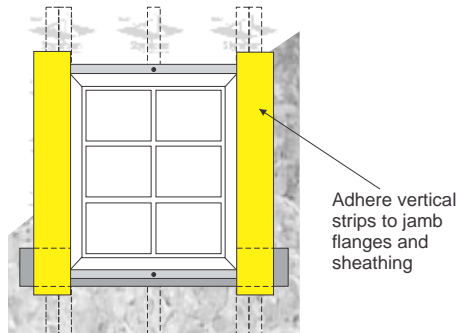

## STEP 4 - Head Flashing

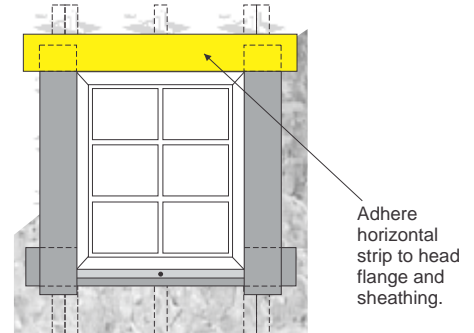

# Utility Moisture Flash




"When Doing It Right Matters"

**DESIGN FEATURES:** Utility Moisture Flash is a heavy duty, flexible, tear resistant, woven polypropylene nail on flashing designed to prevent moisture and water from entering the wall cavity and when used around windows and doors. Utility Moisture Flash was engineered to provide excellent durability when exposed to high ultraviolet rays and has the ability to withstand high winds. The cross woven design is to be mechanically fastened with staples or capped nails. **Easy to integrate with a weather-resistive barrier.**

- Approved for usage per ASTM E2112-01, Installation of Exterior Windows & Doors
- Excellent Moisture Resistance - Up to 140 Hrs at 100% Humidity
- Mold & Mildew Resistant
- Wind & Tear Resistant
- UV Resistant Up to 365 days
- Fast & Flexible Installation
- Resists Cracking
- Will not De-laminate or Shrink

**ROLL SIZE:** 12" Width x 120' Length

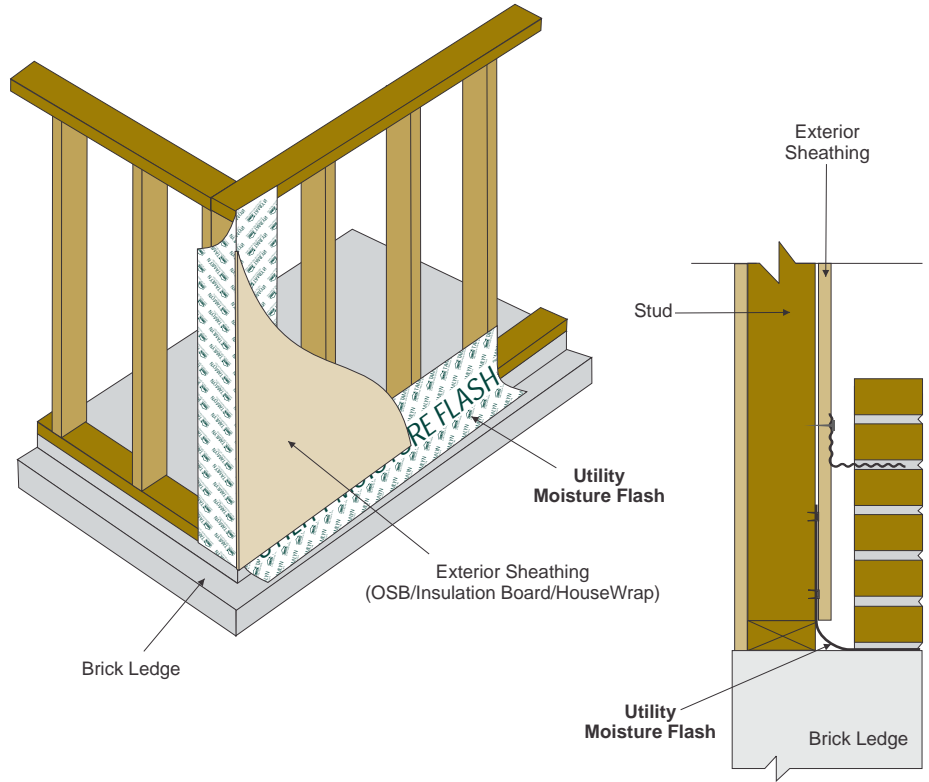

# Tamlyn Color Sealant



"When Doing It Right Matters"

Tamlyn Color Sealant is a high performance, one component, permanently flexible, easy to use, multi-purpose fast cure modified polyurethane sealant. Tamlyn Color Sealant cures rapidly when exposed to atmospheric moisture to form a durable bond. Tamlyn Color Sealant Modified Polyurethane Sealant is now available in 26 colors, all of which match today's popular window extrusions, and siding colors, regardless of the material or manufacturer.

**FEATURES:**

- No Solvents, Very Low VOCs
- AAMA Certified
- Non-Yellowing
- Can Be Painted in 2 hours
- Fast Cure at a wide range of temperatures
- Aggressive Adhesion to common construction substrates
- Compatible with SBS Flashing

**APPLICATIONS**

- Perimeter sealing of windows, doors & skylights
- Siding
- Construction Flashing Applications
- Sealing Water Proof Membrane
- Industrial Applications

**SPECIFICATIONS:** ASTM C-920 Type S & TTS-0230C, Grade NT, Class 25. AAMA 808.3-92 Exterior Perimeter Sealing.



**HOW TO USE:**

For best results, prepare clean, dry surface. Cut nozzle to desired bead size and puncture inner seal. Apply with a caulking gun forcing sealant onto the substrate, then tool if needed. Can be painted within 2 hours depending upon bead size. Clean excess material with mineral spirits or similar solvents. It is the user's responsibility to thoroughly test any proposed uses with any and/or all substrates.

**PACKAGING:**

10.1 fl oz plastic fixed nozzle cartridges

**STORAGE LIFE:**

10 months shelf life. Material is to be stored in a controlled environment below 75 degrees

**LIMITED LIFETIME WARRANTY:**

This product is guaranteed to give satisfactory performance if applied in accordance with the label directions. Liability to Tamlyn is limited to a full refund of the purchase price or product replacement if product is proven defective. Tamlyn shall not be liable for loss or damage, whether direct, consequential or incidental. There are no other warranties expressed or implied including the implied warranty of merchantability or fitness for a particular purpose.

Colors shown are as accurate as printing methods will permit. Please see actual product sample for true color. Product and color availability vary by region and are subject to change. **There will be color variance lot to lot.**

AW - Arctic White
AT - Autumn Tan
BB - Boothbay Blue
CHB - Chestnut Brown
CS - Cobble Stone
CR - Countrylane Red
HC - Harris Cream
HM - Heathered Moss
IG - Iron Gray
KB - Khaki Brown
MT - Monterey Taupe
MS - Mountain Sage
NB - Navajo Beige
PP - Parkside Pine
TB - Timber Bark
WB - Woodstock Brown

# TamlynWrap™

---

## Drainable House Wrap

Advanced moisture management  
Minimize trapped moisture  
Faster cavity dry time  
1.5mm gap for better drain-ability

**EXCEEDS AC38, INCLUDING NEW DRAINAGE PROVISION**



[www.tamlyn.com](http://www.tamlyn.com)

800-334-1676

"When Doing It Right Matters"