

TWPSA - TamlynWrap® ProSelect™ Self Adhered

Tech Support / Sales: 800-334-1676
www.tamlyn.com

DESIGN FEATURES

HIGH WATER RESISTANCE

No fasteners required for a continuous protective layer that self-seals along horizontal and vertical overlaps as well as around cladding fasteners.

EXCELLENT ADHESION

Advanced acrylic adhesive layer meets or exceeds AAMA 711 adhesion requirements of AC38. May be installed when substrate temperatures are >25F without need for a primer.

SUPERIOR AIR BARRIER PERFORMANCE

Adhesive layer seals sheathing gaps, product overlaps and around fasteners. Easily integrates with other wall components for superior air tightness, energy efficiency and overall indoor comfort.

VAPOR PERMEABLE

Designed to maintain >20 perms when installed. This facilitates drying of wall components limiting the potential for mold and water related damage.

DURABLE

Strong non-woven structure provides superior UV (180 days), tear and blow-off resistance.

COMPATIBLE WITH COMMON PRODUCTS

May be installed over Tamlyn MgO, plywood, OSB, exterior gypsum, CMU and other exterior wall substrates.

MULTI-PURPOSE

May be used in commercial, multi-family or residential applications.

EASY INSTALLATION


May be installed without special tools horizontally or vertically. Can be positioned and smoothed by hand before fully adhering using a hard roller. Easy to work with in sections as needed.

SUPERIOR WARRANTY

Backed by a 15 year product or 25 year product and labor limited warranty.

BEST PRACTICE

TamlynWrap® ProSelect SA must be installed SHINGLE FASHION and integrated with other wall components to promote positive mechanical drainage. All horizontal and vertical overlaps shall be 4" with a 6" overlap at any corners. For full adhesion, product must be rolled in place with a hard roller. May be installed when substrate temperatures are >25F without a primer provided surfaces are clean and free of debris or contaminants. Primer may be required for porous or challenging surfaces.

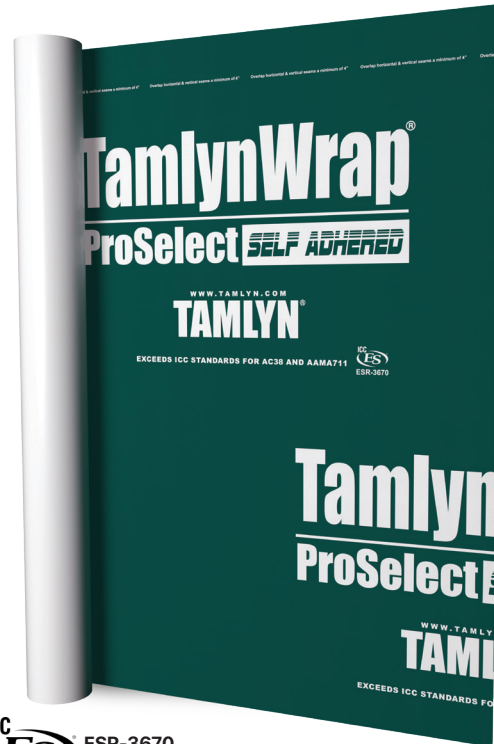

TECHNICAL PROPERTIES

ITEM ID	TWPSA5X100
WIDTH	5 ft
LENGTH	100 ft
COVERAGE	500 sf
ROLL WEIGHT	32 lbs
VAPOR PERMEANCE	>20 perms
UV RATING	Max 180 days
WARRANTY	15-25 year limited
CODE APPROVAL	ICC ESR 3670, FPA, CA
ADHESIVE	Advanced Acrylic
COLOR	Green
STORAGE TEMP	40° F to 120° F
INSTALLATION TEMP	>25° F w/o Primer
SERVICE TEMP	-40° F to 180° F *
FIRE RATING	Class A

*primer may be required for porous or challenging surfaces